


# fluor::lyser II

fluor::lyser II monitors fluoride and temperature

- s::can plug & measure
- measuring principle: ISE (ionselective electrodes)
- no cross sensitivities in typical drinking water applications
- multiparameter probe
- long term stable, factory precalibrated
- automatic cleaning with compressed air
- easy and quick mounting and measurement directly in the media (InSitu) or in a flow cell (monitoring station)
- operation via s::can terminals & s::can software
- ideal for drinking water
- minimal maintenance
- plug connection or fixed cable

## recommended accessories

| part number    | article name                                            |
|----------------|---------------------------------------------------------|
| B-44           | cleaning valve                                          |
| B-44-2         |                                                         |
| C-1-010-sensor | 1 m connection cable for s::can physical and ISE probes |
| F-11-oxi-ammo  | carrier oxi::lyser / soli::lyser / s::can ISE probes    |
| F-45-ammo      | flow cell for ammo::lyser™                              |
| F-45-process   | process connection 1/4" G                               |
| D-330-xxx      | con::cube V3                                            |
| D-320-xxx      | con::lyte                                               |

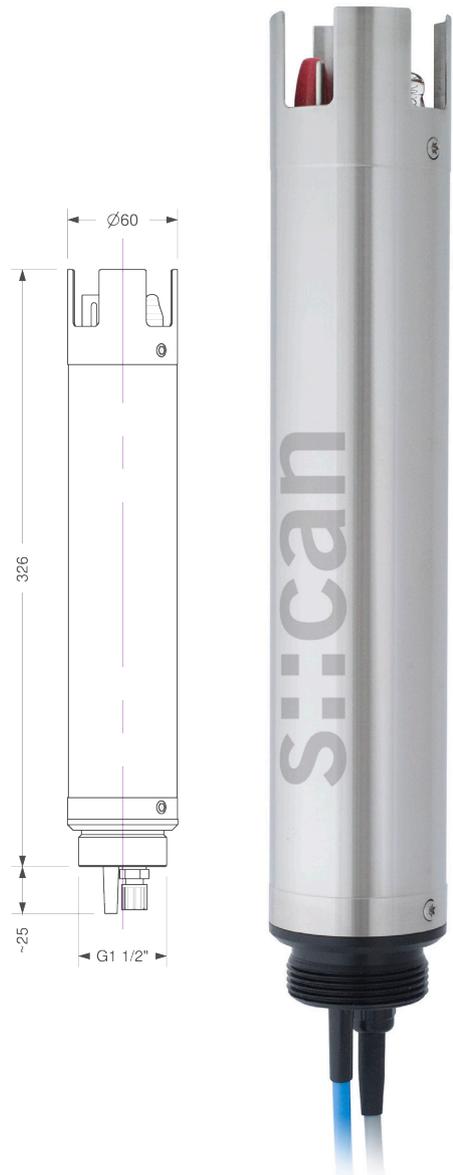

### technical specification

|                                   |                                                       |                                 |                                                            |
|-----------------------------------|-------------------------------------------------------|---------------------------------|------------------------------------------------------------|
| measuring principle               | ISE                                                   | operating temperature           | 0 ... 60 °C                                                |
| measuring principle detail        | F: ionophore membrane<br>reference electrode          | installation / mounting         | submersed or in a flow cell                                |
| automatic compensation instrument | temperature                                           | process connection              | G 1 1/2" outside                                           |
| potential interfering ions        | OH- (at >pH8), Al3+, Ca2+, Fe3+,<br>Si4+              | flow velocity                   | 0.01 m/s (min.)<br>3 m/s (max.)                            |
| precalibrated ex-works            | all parameters                                        | pH range                        | 4.5 ... 7.5                                                |
| integration via                   | con::cube<br>con::lyte<br>con::nect                   | ingress protection class        | IP68                                                       |
| power supply                      | 10 ... 30 VDC                                         | automatic cleaning              | media: compressed air<br>permissible pressure: 2 ... 4 bar |
| power consumption (typical)       | 0.72 W                                                | storage temperature             | 0 ... 60 °C                                                |
| interface to s::can terminals     | sys plug (IP67), RS485                                | storage temperature (electrode) | 2 ... 40 °C                                                |
| cable length                      | 7.5 m fixed cable (-075) or<br>plug connection (-000) | storage temperature (sensor)    | 2 ... 40 °C                                                |
| cable type                        | PU jacket                                             | conformity - EMC                | EN 50081-1<br>EN 50082-1<br>EN 60555-2<br>EN 60555-3       |
| housing material                  | stainless steel 1.4571, POM-C                         | conformity - safety             | EN 61010-1                                                 |
| weight (min.)                     | 2.7 kg                                                | protection class (-000)         | IP67                                                       |
| dimensions (Ø x l)                | 60 x 326 mm                                           | protection class (-075)         | IP68                                                       |

### measuring range

|                 |      | parameter   | temperature | part number      |
|-----------------|------|-------------|-------------|------------------|
|                 |      | F<br>[mg/l] | [°C]        |                  |
| fluor::lyser II | min. | 0.1         | 0           | E-542-000 / -075 |
|                 | max. | 1000        | 60          |                  |