

# Waste Water


---

Water Quality Online



# Parameter & Product Overview

This is an overview of all the products and their respective parameters. Take a look at the parameters that you need to measure and choose the right product for your application. Further information can be found on the stated page number.

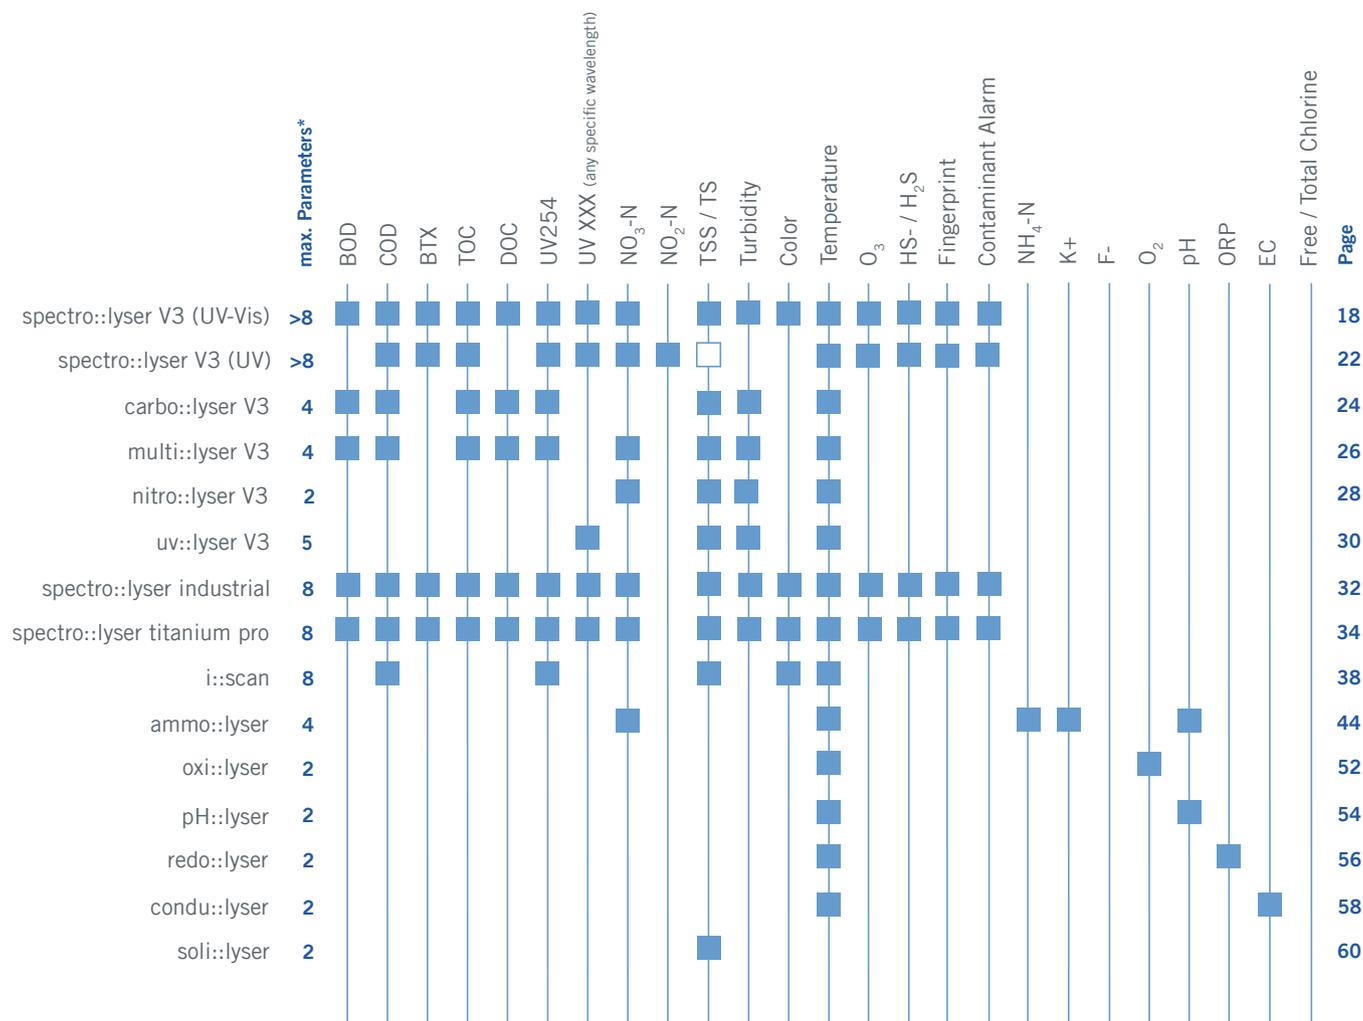

\* The number of parameters is depending on the specific configuration of the monitoring system.

## Table of Contents

### Who is s::can 3 – 6

---

Foreword

### Parameter Overview 7 – 13

---

Why do we measure  
How do we measure  
The s::can solution

### Spectrometer Probes 14 – 35

---

spectro::lyser™ V3  
spectro::lyser™ UV  
carbo::lyser™ V3  
multi::lyser™ V3  
nitro::lyser™ V3  
uv::lyser V3  
spectro::lyser™ industrial  
spectro::lyser™ titanium pro

### i::scan 36 – 39

---

i::scan

### Ionselective Probes 40 – 47

---

ammo::lyser™

### Physical Probes 48 – 61

---

oxi::lyser™  
pH::lyser  
redo::lyser  
condu::lyser  
soli::lyser

### Terminals 62 – 69

---

con::cube V3  
conline  
con::lyte eco/pro  
con::nect V3

### Software 70 – 79

---

moni::tool  
vali::tool  
ana::tool  
visu::tool  
moni::app

### System Configuration 80 – 81

---

con::cube  
con::line  
con::lyte  
con::nect

### Monitoring Stations 82 – 87

---

micro::station

### Spare Parts & Accessories 88 – 97

---

### Services & Solutions 98 – 101

---





## **A warm welcome to s::can, a Badger Meter brand!**

You are holding the catalogue from s::can GmbH in your hands – your guide to innovative water quality monitoring solutions, tailored to your individual needs.

s::can is the world technology leader for submersible online UV-Vis spectrometer probes and provides monitoring systems and software for drinking-, environmental-, waste-, and industrial water applications.

## **We are Smart Water.**

---

For more than 23 years s::can has been on the forefront of developing and distributing innovative, reliable online water quality monitoring products. Since November 2020 s::can is proudly part of Badger Meter Inc.'s Water Quality Division. Together with Badger Meter, ATi and Syrinix we offer you integrated, customer-centric, world class Smart Water solutions.

Badger Meter is an industry-leading innovator in flow measurement, water quality and control products, serving water utilities, municipalities and commercial and industrial customers worldwide. In the near future, Badger Meter's software solutions are going to integrate data from s::can products and provide utility management with greater visibility, control and optimized information. ATi is a leading provider of analytical sensors and monitoring solutions for water and gas applications. Syrinix offers a combination of network monitoring equipment with a cloud-based data platform, expert advisory analysis and management services.

With our collective expertise and combined experience we are creating robust digital solutions to operationalize real-time data into actionable insights that drive better results, optimize operations, reduce costs and provide a broad product and solutions range for all your water quality monitoring needs.

## **Water is global, and so are we.**

---

We are constantly enhancing our products and services, and with that expanding our presence globally. Next to our headquarters in the USA and the former s::can headquarters in Austria you can find Water Quality subsidiaries and Sales offices in Mexico, UK, France, Spain, China, Singapore and Dubai. Our Sales Partner network with more than 50 partners allows us to cover the needs of our customers worldwide.

We aim to preserve the world's most precious resource and consider online water quality monitoring the essential basis for this goal. Monitoring combined with optimization of treatments and processes helps to minimize water pollution and to secure a high water quality for our planet as well as a livable, sustainable future.

# Intelligent. Optical. OnLine.

## Our Services & Our Guarantees

---

Whether it is a simple pH sensor or a complex spectral probe, s::can instruments are intelligent and compatible with third-party systems. All sensors can communicate with all s::can terminals, being operated without a terminal and even can be integrated directly into your control system. s::can software guides the instruments from first installation, over to maintenance and calibration. The instruments have a comprehensive repertoire of self-diagnosis functions, informing you immediately on any deviation in water quality. Once you are familiarized with s::can software, the intuitive procedure is always the same, keeping operations as simple as possible.

## Optical

---

Organically developed, constantly improved, and tested, optical sensors ensure the simplest and most reliable way to measure water quality. It does 't matter whether it is COD, TOC, NO<sub>3</sub>, NO<sub>2</sub>, TSS, turbidity, dissolved oxygen, or many other parameters, whenever it is possible, we use optical methods. The instruments simply ensure low maintenance costs and easy handling for operators.

In case a parameter cannot be measured with optical methods, s::can offers you a broad repertoire on other sensors covering most of the important parameters in water quality.

One of our best examples is the ammo::lyser™, an ion selective ammonium probe, using a combination of electrodes for pH and potassium compensation, ensuring a fast and reliable NH<sub>4</sub> measurement. With the ammo::lyser™, we have set new standards and won many trials against comparable instruments.

## OnLine & InSitu

---

On top there are our fully modular compact monitoring stations that combine instruments and terminals to build a variable water quality tool. Presenting a complete station solution, only with connecting water and power supply, open a new world of water quality monitoring in respect of variety of information and parameters to the user.

For instance the combination of the parameters COD, BOD, NO<sub>3</sub>, NH<sub>4</sub>, NO<sub>2</sub>, TSS and pH can be measured with only two s::can probes and one terminal, replacing an entire container of conventional cabinet analyzers and thereby revolutionizing water and waste water monitoring around the world. Whether in bypass monitoring stations or in submerged installations, we are proud of having created and continuously improved all of this in the last 20 years and have created new standards in water quality monitoring. Since 2000 when we launched our first spectro::lyser™, today, over 10.000 systems were sold, making s::can the global market leader in online spectroscopy.

# Our Services & Our Guarantees

## About our prices

---

Have you ever been annoyed of buying a cheap printer and later notice that the ink cartridge costs nearly the same as the printer? Unfortunately, a similar trend arises in the sector of water quality monitoring -.

s::can does not try to make profit with „consumables“ such as reagents and spare parts, hitting the customer with unexpected costs. The consumables strategy contradicts our principles of fairness and sustainability. We make our revenue with water quality instruments. Most of our probes are designed in such a way that they need no consumables at all. If needed, the use of consumables is on the technically feasible minimum. The operating costs of our instruments are typically very low due to reduced maintenance effort.

## Cost Guarantee - No surprises over many years

---

Within the framework of individual service contracts and for an annual fee we will be happy to give you a guarantee to cover all costs that might arise in the operation of our instruments, beyond our comprehensive standard guarantees. For 3 years, 5 years or even more Whenever you compare our instruments with other manufacturers, you will be amazed how inexpensive s::can measuring systems are to operate.

## Quality Guarantee - No one can do more for optimum quality

---

The effort that we make in controlling quality in production is probably unique. Just visit us at our production facility in Vienna, Austria and we will be happy to show you our production plant and our QS system. We are only allowing reliable, simple and at the same time intelligent sensors being part of our measuring systems. We give a minimum 2-year full guarantee on all sensors.

## “CleanData” Guarantee - And you can focus on your own job

---

Within service contracts we will also be happy to give functionality and availability guarantees. In this case our local partners handle the installation, setup, calibration and maintenance of your instruments and we send you regular reports on measuring performance and automatically give you service recommendations if you allow us remote access to the measuring system. Our customer service team will even investigate your application and give you suggestions in case of any non-considerations at the commissioning of your measuring system. You can focus on your central tasks while we are focusing on your water quality.

## Environmental Guarantee - Monitoring the environment, not polluting it

---

Our measuring instruments are built in a way to not use chemicals or produce any waste during operations. Most s::can instruments operate for many years without consuming any replacement or spare parts. We are taking care to avoid environmentally harmful processes or chemicals in manufacturing. Even the packing of our instruments is accomplished in the most sustainable way. Every of our instruments leaves a truly negligible “ecological footprint” compared to traditional laboratory methods, quick test, and analyzer technologies.

Our services  
+ Our guarantees

= your benefit

# Water Quality Parameters

## Correlation with laboratory parameters

---

It's often a requirement of customers with legal duties to verify the accuracy of online sensors with standardized reference methods in the laboratory. This audit is indispensable – but often not trivial.

For comparison of laboratory analysis with online technologies a few factors must be considered. First the representativity of the sampling point, compared to the online sensor installation. Second, incorrect storage and transportation can lead to changes in the composition of the sample. These two factors have a deep impact on the laboratory analysis, rather than the analysis itself. Depending highly on the parameter, application and operator skills but occurs even when work is proper done. The online measurement value is very often higher than the laboratory measurement since parts of the target substance is often lost during sample handling. Over the years we collected many examples where, despite the use of quality-controlled reference methods, parameters such as BOD, COD, NO<sub>3</sub>-N, and TSS were systematically 10 – 20% higher compared to laboratory measurements. Further these values were taken for calibration of the online sensor leading into too low online measurement values. In our experience a very good correlation can normally be achieved between the online sensor and the laboratory, but it takes a lot of specialist knowledge and experience. We are very happy to support our customers to achieve the best possible results with our comprehensive experience.

In recent years many countries have witnessed a change of paradigm towards the recognition of online methods. The tremendous operational advantages gained from continuously measuring in high resolution, opens a new world in water quality monitoring.

With more than 20 years of experience in the field of comparative studies, after over hundreds technical commissioning's and approvals, and with dozen tests in many countries of the world, s::can can offer you the best possible support. We know what is essential, even in the most distinct applications that can occur in water management. Our feasibility studies and calibration reports are well known throughout the sector, are worked out diligently by scientists and well experienced technicians in our team using approved methods.

# Parameter Overview

## “Why do we measure”

---

The goal of quality monitoring various natural waters and drinking waters is the reduction of harmful effects to our environment and our human health. This aim must fulfil various guidelines that are defined in ecological and drinking water quality regulations. Because of the continuous efforts to improve the quality of natural waters, to reduce the health risks of water consumers and to optimize the efficiency of drinking and waste water treatment, the requirements for process technology and for quality control of water are always increasing.

Therefore, reliable monitoring stations that provide continuous data are an essential tool in the drinking water supply and environmental protection - both for real time process control as well as for continuous monitoring of the water quality. In environmental applications as well as in drinking water, s::can monitoring stations have been in use for many years. Their technological and methodological have set new standards with respect to measurement performance and have often opened completely new opportunities for drinking water security and environmental protection.

## “How do we measure”

---

All s::can instruments are pre-calibrated ex works. The s::can terminals are equipped with respective connectors and software for operation the s::can probes. All s::can measurement systems consisting of standardized s::can products are ready for use without the need for complex initialization procedures on site . This does not only allow save time during initial operation, but also reduces avoidable errors.

Manufactured using highly resistant materials and tested according to the highest quality standards, s::can measurement instruments can be used in practically all types of waters. The highly optimized design eliminates all moving parts in contact with water. This reduces failures and maintenance drastically.

Using standardized mounting devices, s::can spectrometer probes can be installed quickly and effortlessly, either submersed (in Situ) or in flow cells (by-pass, monitoring station).

All s::can instruments are intelligent -and in comparison to other suppliers local calibrations are stored on the instruments and auto-diagnosis procedures ensure the integrity of the sensor

Suitable for a wide range of applications, ranging from very low up to very high concentrations, from sum parameters to measurement of single substances, from ultra-pure water to industrial waste waters, s::can monitoring systems provide reliable and accurate readings. Even in such applications, that had remained untouched for other instruments and technologies.

# The s::can Solution

## The spectrometer probe

Out of the laboratory - into the water. Away from the complicated and high-maintenance cabinet analyzers towards reliable and simple online technologies with submersible spectrometers. A trend for the future of water management? We are convinced of it. s::can spectrometer probes need practically no maintenance, are extremely robust and durable and keep measuring for years, 24 hours a day. The advantages are obvious and are described later in more detail for individual measurement parameters.

	Spectrometric	Photometric	Cabinet analyser
Accuracy	★ ★ ★	★	★ ★ ★ ★
Stability (drift)	★ ★ ★ ★	★ ★ ★	★ ★
Calibration effort	★ ★ ★	★ ★	★ ★ ★ ★
Maintenance effort	★ ★ ★ ★ ★	★ ★ ★ ★	★
Purchase costs	★ ★ ★ ★	★ ★ ★ ★	★
Operating costs	★ ★ ★ ★ ★	★ ★ ★ ★	★

Comparison of various procedures for monitoring organic chemistry

## The spectrometer probe ...

... provides several crucial advantages over simpler photometer probes:

- 1) A tremendous number of parameters can be measured at once, with a single probe. This flexibility also permits extension of the range of parameters for future applications which have not been considered at an early stage.
- 2) Especially in difficult applications the measurement is more stable regarding cross-sensitivities and therefore more accurate than classic photometer probes.
- 3) Even in these special applications, you will find spectral data correlating well with the substances of interest. In the event of major changes in water composition, only a new calibration is required, and our team will be happy to support you in this case.
- 4) Many single substances can be identified against fluctuating changes in the water matrix and subsequently quantified with chemometric tools which cannot be used at all with simple photometric probes.
- 5) Distinguishing between total and dissolved substances is possible. s::can uses a sophisticated mathematical algorithm that allows this distinction. This algorithm can also be adapted as per your needs and applications.
- 6) The intelligent spectral alarm allows detection of deviations from a normal water composition and provides an associated alarm signal. This method is now acknowledged and in use around the world, e.g., in drinking water and river water alarm systems and industrial discharge monitoring.

# Conventional Solutions

## The traditional cabinet analyser

This type of instrument has been in use for about the last 30 years for measuring most chemical parameters. These analyzers can often only be maintained with high effort, they consume chemicals and spare parts, pollute the environment, and need frequent attention. Usually, they are so expensive and unreliable in operation that users just shut down these instruments after some period of time.

## The simple photometric probe

... despite its disadvantages, still in widespread use today, because for a long time there was no alternative available for monitoring organic carbon compounds. It is also used for monitoring other compounds, like  $\text{NO}_3^-$ . Since these probes can only measure one parameter, the flexibility is very restricted. The measurement of COD was assumed to be impossible simply by an unusual water change. However, with clear water and completely stable water composition, good results can sometimes be achieved. With fluctuations in turbidity, a second wavelength must also be considered for compensation - still this does not deliver the same accurate results compared to a full spectral compensation (see picture).

These simple probes are not able to deal with water matrix fluctuations and they often provide results that are not sufficiently correlated with the real concentration of the parameter of desire. Since these probes remain restricted to single parameter monitoring, a substantial cost disadvantage compared with a spectral probe arises.

## The s::can Solution

---

s::can spectral instruments capture the major variety of organic carbon compounds, covering approximately 80% in drinking and waste water. The comparison between laboratory COD or laboratory TOC and spectroscopically determined values should always be better than 90% depending on the range and distribution of your reference samples, used for calibration. If that does not work out or is not satisfactory for you, please directly contact s::can Support (email: support@s-can.at).

For many applications the solid and therefore, carbon removal is crucially important. Therefore, the distinction of total COD and dissolved COD, or between TOC and DOC is of major importance. The spectro::lyser has the ability via highly distinct compensation algorithms to capture both fractions (with and without solids).

Another great advantage of spectrometry is that it cannot only measure the concentrations of total and dissolved organic compounds-it can even detect single substances out of a potpourri of carbons in the water. It is possible to distinguish between "normal" and "abnormal" organic composition with our event detection tools. The s::can spectrometer probe is now accepted by public authorities in many countries as a measuring methodology for COD or TOC, and we see an upgoing trend worldwide.

---

Spectral BOD, provided by s::can has nothing to do with the widely used simple correlation of BOD with UV254 that is used by other manufacturers but which rarely works reliably.

Spectral algorithms were developed for various waters from thousands of samples, and these are based on the absorption of light of biologically easily accessible carbon compounds (e.g. proteins, acids etc.) in the wavelength range. (See diagram on the next page). It is always recommended that the BOD (as opposed to other spectral parameters) be calibrated after commissioning of a measuring station by comparison with a reference method.

## Conventional Solutions

---

In the attempt to come as close as possible to the normative standards, laboratory methods were transferred to field analyzers. As these methods are not practical in process and field applications, these analyzers are expensive in procurement and operations, complicated to maintain, unreliable and harmful to the environment. The quality of measurement achieved is usually less than the given specification since very few users have the interest to deal with these instruments to keep them in reliable operation.

Even if these instruments work under perfect conditions, it is not possible, to capture fast harmful or even toxic spills as their measuring time, from sample to result is quite high.

That's the reason replacing of COD cabinet analyzers is one of s::can's major areas of business.

The same pertains for TOC analyzers.

---

Although BOD is a very interesting parameter, for monitoring source water and design of wastewater treatment plants, it is difficult to sample, prepare and also you will the measurement results only after 5 days analyze. Among other things, measurement in the presence of inhibitors regularly causes problems.


BOD cabinet analyzers do not reflect BOD according to the standard and they must therefore first be compared themselves with the laboratory method and then calibrated accordingly. The maintenance effort of BOD analyzers may be substantial, which is why BOD is rarely measured online with any dedication.

**COD**

**COD dissolved**

**TOC**

**BOD**

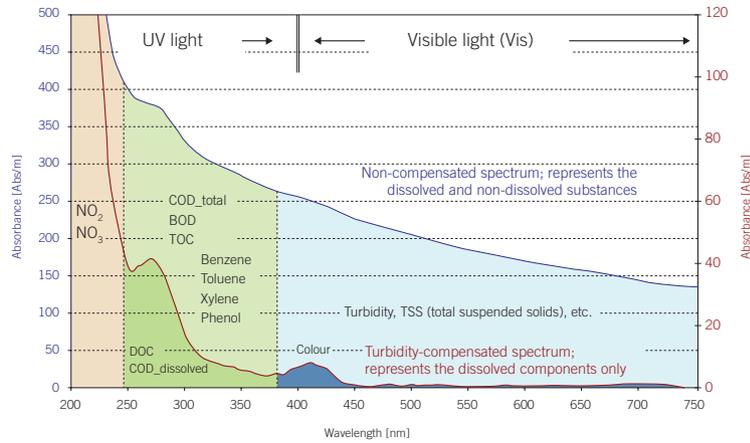

s::can measuring method – “Fingerprint“

## The s::can Solution

**NO<sub>3</sub>-N** Depending on the method, a spectral probe measures the nitrate concentration with much higher accuracy and stability and more independent from cross-sensitivities than a simple photometric probe (see diagram below).

The NO<sub>3</sub> value is accurately measured and displayed by s::can spectral probes in many applications without calibration. Depending on the application different path lengths are available, reaching from 35mm in drinking water down to 0.75mm in wastewater.

The NO<sub>3</sub> value measured by s::can spectral probes is extremely stable in respect to matrix fluctuations. Thus, for instance, an accurate NO<sub>3</sub> value can be measured with one and the same instrument in most flows without local calibration and independent from typical daily, weekly, or seasonal fluctuations either. Many subsequent years of operation are characterized by low maintenance and high resolution monitoring making the spectro::lyser a perfect solution

## Conventional Solutions

Nitrate is hardly ever measured these days with cabinet analyzers since these also create disadvantages (hydraulic sampling, reagent consumption, maintenance effort etc.

Ion-selective (ISE) probes have also recently experienced a renaissance in nitrate measurement. However, by contrast with ammonium, the nitrate membranes available today are not so practical in use because they require more maintenance and need more attention. However, ISE probes are increasingly being offered as an alternative to control nutrient removal processes, often in combination with ammonium.

Comparison of various methods for monitoring NO<sub>3</sub>-N

	Spectrometric	Photometric	ISE
Accuracy	★★★★★	★★★	★★
Stability (drift)	★★★★	★★★	★
Calibration effort	★★★★★	★★★	★
Maintenance effort	★★★★★	★★★★	★★★
Purchase costs	★★	★★★	★★★
Operating costs	★★★★★	★★★★	★

## The s::can Solution

s::can has achieved a breakthrough and can offer nitrite measurement, also in combination with nitrate and COD in a single probe, which correlates perfectly with reference methods.

This establishes fundamentally new views both for treatment plant control removing nutrients, for ecologists in monitoring of the emission situation, and for the fish industry controlling nitrite levels in basins.

For the first time, the combination of COD or TOC, nitrate and nitrite in a single probe for the operation and control of a treatment plant (see adjacent diagram) allows a detailed interpretation of the nutrient removal process.

## The ammo::lyser™ is a third generation ion-selective (ISE) probe.

It is not only the  $\text{NH}_4$  in aqueous solution measured, also the potassium concentration and the pH value allowing most interferences to be eliminated in a concentration range between 0.1 to 1,000 mg/l.

The expected effort and cost of installation, maintenance and consumables is significantly reduced with using the s::can ammo::lyser™. Compared to cabinet analyzers the faster measurement gives a significant advantage in process control (like wastewater aeration).

With regard to the controller, software, compressed air cleaning and interfaces, the ammo::lyser™ is fully integrated into s::can measuring systems, so it can be simply connected to existing s::can systems and directly start measuring.

The ammo::lyser™ has several core distinguishing features compared with the ISE ammonium probes of other manufacturers.


### Free of interference?

The ammo::lyser™ compensates for any interference with the ISE ammonium measurement. The superior features of the ammo::lyser™ are to be found in the use of the most highly-developed membranes and in the utilization of today's most advanced algorithms and calibration methods.

## Conventional Solutions

Until recently nitrite was measured almost exclusively by labor colorimetric methods using analyzer cabinets. The disadvantages already mentioned (mechanical sampling, reagent consumption, maintenance effort, environmental pollution, costs etc.) in principle also apply to nitrite analyzers. Therefore this effort and expense on measuring nitrite has not been widely used up to date although many applications would benefit from the availability of this parameter.

$\text{NO}_2\text{-N}$

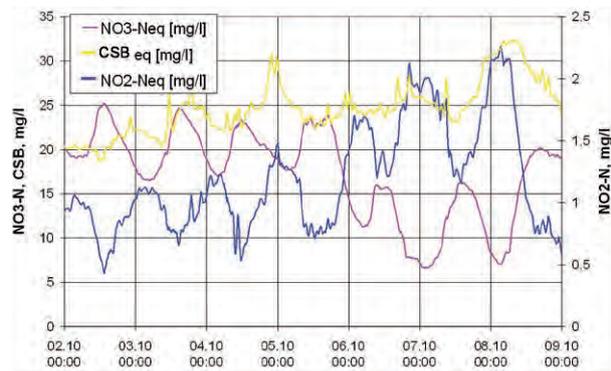

## Ammonium is today still often measured with conventional cabinet analysers.

The disadvantages already mentioned (mechanical sampling, reagent consumption, maintenance effort, environmental pollution, costs etc.) in principle also apply to ammonium analyzers.

$\text{NH}_4\text{-N}$

Following the great success of the s::can ammo::lyser™, users worldwide have once more found confidence in ISE technology. In 2007 more than 100 sewage works were equipped in England alone. As a result, other manufacturers have recently produced ISE probes which show similarities with the s::can ammo::lyser™ in some cases.

## The s::can Solution

### Factory calibration?

With the introduction of innovative calibration methods and new chemometric models as well as with the storage of all data and models equipped, the ammo::lyser™, previously unattainable precise and accurate measurements ex-factory have become possible without initial calibration.

### Precise and accurate enough, even for compliance monitoring and fresh waters ?

The measurement performance of the ammo::lyser™ is unbeaten in all areas of applications, but in particular in applications with both low ammonium concentrations and high relative potassium content. Used in nutrient removal control on WWTPs, compliance monitoring in WWTP effluents up to monitoring of fresh water bodies, the s::can ammo::lyser™ persuades in all comparison tests up to date !

### Cleaning/rinsing integrated?

Connect to the local compressed air source and it's done. The proven automatic compressed air cleaning is always integrated ex-works.

### Lowest operating costs?

In the aeration tank you normally only need to change the NH4 membrane once or twice a year. In WWTP effluents – for compliance monitoring - and in fresh waters the exchange might be wanted slightly more frequently. s::can even offers to refurbish electrodes once, which lowers operating costs drastically. Just send us your electrodes!


## Conventional Solutions

Most other ISE instruments on the market must be calibrated for initialization or “adjusted to the medium”. Further this procedure has to be repeated significantly more often in operation than with the ammo::lyser™.

ISE instruments other than the ammo::lyser™ have till now not been successful in the difficult concentration range below 1 mg/l. Apart from probably the best membranes on the market we also offer you the experience in applications requiring this low concentration range to keep the measurements stable over long periods . Further we offer you automatic cleaning systems to keep the probe always working stable.

With other instruments on the market, once you have discovered that the membrane is worn out you must replace the entire cartridge system, containing all the electrodes. As a result the annual costs are several times those of the ammo:lyser™.

## Applications of s::can spectrometer probes from discharge to effluent

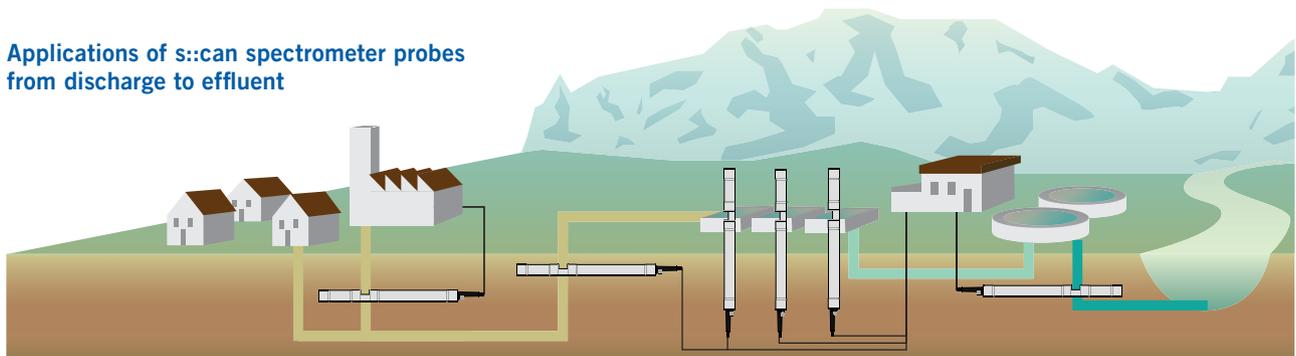

### Monitoring of municipal and industrial waste water:

- Compliance with emission regulation limits
- Determination of process stability
- Determination of problems within/during the process
- Real time dosing
- Determination of product losses
- Effluent monitoring
- TSS
- COD
- NO3
- NH4
- pH
- EC
- ORP

### Sewer Monitoring:

- Determination of waste water composition
- Identification of industrial dischargers
- TSS
- COD
- BOD
- NO3
- H2S
- Alarm
- NH4
- pH
- EC
- ORP
- O2

### Monitoring of WWTP influent:

- Quantification of load and nutrients
- Judgement of consequences due to indirect dischargers
- Reaction to loadpeaks
- Real time dosing
- TSS
- COD
- BOD
- NO3
- H2S
- Alarm
- NH4
- pH
- EC
- ORP
- O2

### Optimisation of aeration:

- Cost savings due to process optimisation
- Nitrification- and denitrification control in real time
- Reduction of operational costs
- TSS
- NO3
- NO2
- NH4
- TS
- O2
- ORP
- pH

### Monitoring of WWTP effluent:

- Determination of efficiency
- Control of cleaning process
- Compliance with emission regulation limits
- TSS
- BOD
- NO3
- NO2
- NH4




- Spectrometer Probes
- !::scan
- Ionselective Probes
- Physical Probes
- Terminals
- Software
- System Configuration
- Monitoring Stations
- Spare Parts & Accessories
- Services & Solutions

# Spectrometer Probes



spectro::lyser with efficient automatic cleaning

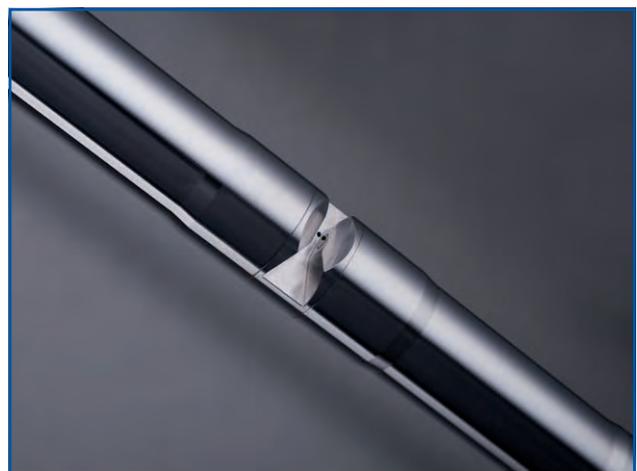

spectro::lyser V3

# Spectrometer Probes

## “Why do we measure”

Usually sum parameters such as COD, COD filtered, BOD or SAC are established to quantify the organic load contaminating waste water because the total organics is composed of a multitude of substances.

s::can spectro::lyser™ or carbo::lyser™ can continuously measure organic parameters as well as suspended solids in the influent allowing wastewater treatment plants preparing their process control according to the changing contaminant loads. This type of monitoring is essential as peaks in the organic load of the waste water can lead to troubles or even breakdowns of complete treatment processes. Used already in the sewer system the carbo::lyser™ provides a head start in detecting events and moreover can be employed to localise the origin of peaks in organics concentrations.

The separation of waste water treatment costs based on different pollutant loadings and the continuous monitoring for unexpected discharges into the sewer system are only two possible applications of the carbo::lyser™. As soon as the true concentrations of suspended solids and organic substances to be removed from the waste water are known, it is possible to optimise the design of sewers, reservoirs and treatment plants accordingly (most often the planned infrastructure can be reduced in size).

Although the presence of nitrate in untreated wastewater is often denied, using the nitro::lyser™ most often fluctuating nitrate levels in the waste water treatment plant influent have been observed - probably the result of water infiltration or industrial wastewater discharges.

The benefits of using a spectro::lyser™ or multi::lyser™ are even higher as they provide data of much greater information content: Two different fractions of the organics can be distinguished (for example COD and BOD) and simultaneously the concentrations of solids and nitrate can be determined using one single measurement instrument.

The typical application for the nitro::lyser™ in wastewater is in the biological treatment: In order to reduce the nutrient load of the water, at first nitrogen compounds are converted into nitrate. To achieve this nitrification, big amounts of oxygen have to be introduced into the wastewater. Subsequently, the formed nitrate is converted into nitrogen gas. Monitoring the nitrate concentration is a logical step to process control this biological nitrogen removal.

Nitrate plays a central role in both the energy and cost intensive nitrification and the de-nitrification. In addition to the nitrate level s::can nitro::lyser™ probes also determine the concentration of solids and thus provide two important parameters for process control: TS and NO<sub>3</sub>-N.

In the final effluent nitrate, COD and solids measurements enable analysis of the performance of the treatment (nitrogen and carbon removal). Furthermore, it allows real time detection of operational troubles and process interruptions of the wastewater treatment plant. The spectro::lyser™ can go one step further and even monitor nitrate and nitrite concentrations separately. This feature allows a more detailed management of the biological nitrogen removal, during the two major steps of which nitrite and nitrate are crucial intermediates.

Many industrial processes produce waste water that often can be discharged neither into the municipal sewers nor into natural waters without prior treatment. Commonly the discharger has to pay fees for discharging, the amount of which is determined by the contaminant load in the water. For this reason many dairies, breweries and paper mills use the spectro::lyser™ to monitor both the treatment performance and the compliance with discharge legislation. However, monitoring the parameters solids, COD and nitrate in the process effluent also provides an insight into the production processes themselves and thus allows to detect and to reduce losses of products and reagents.

The spectrum of applications of the spectro::lyser™ is completed by online measurements to detect untypical waste water compositions (for example probably toxic discharges using ana::larm), to reduce corrosion and odour problems (hydrogen sulphide) and to monitor specific substances in applications developed for individual customers (for example pesticide monitoring in process water).

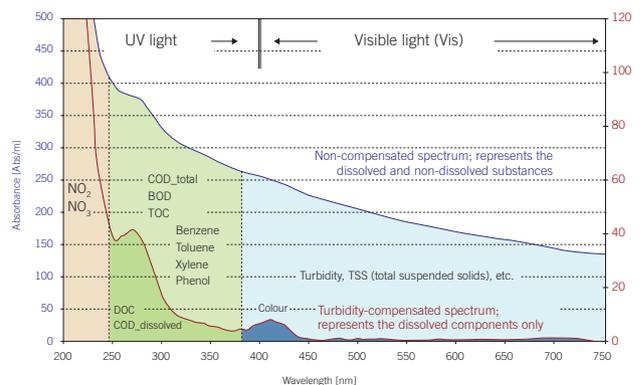


fig. 1 : “fingerprint” absorption spectra

# Spectrometer Probes

## “How do we measure”

All s::can spectrometer probes are multi-parameter instruments that can measure multiple water quality parameters continuously (OnLine) and directly in the water without the need for complex and maintenance intensive sample pre-treatment.

The most important versions of the spectrometer probe are the nitro::lyser™ (nitrate and turbidity/solids), the uv::lyser (UV254 and turbidity/solids), the carbo::lyser™ (COD/TOC/UV254/DOC and turbidity/solids), the multi::lyser™ (nitrate and COD/TOC/UV254/DOC and turbidity/solids) and the versatile spectro::lyser™ (nitrate, solids/turbidity, total and dissolved organics).

As all s::can instruments the spectrometer probes can be operated according to the “plug & measure” principle. With a simple plug connection, which provides power supply and data communication, the s::can sensors are connected to an s::can terminal and are ready for use. All s::can spectrometer probes are pre-calibrated ex works - specific Global Calibrations are available for a large number of standardised applications. The “Plug & Measure” principle avoids complex installation procedures on site and thus does not only save time during initial operation, but also reduces avoidable errors.

The highly optimised design completely eliminates all moving parts in contact with the water as well as consumables. This reduces failures, spare part costs and maintenance dramatically. For s::can spectrometer probes we guarantee replacement of spare parts free of charge for the first three years after delivery (upon presenting the guarantee card).

Using standardised mounting devices s::can spectrometer probes can be installed quickly and effortlessly, either submersed (InSitu) or in a flow through setup (Bypass, monitoring station).

s::can spectrometer probes utilise an automatic cleaning system that uses compressed air for removal of fouling. This system has proven highly efficient and reliable, even in untreated wastewater. Because of this, regular manual cleaning of the optical windows is not required, thus significantly reducing maintenance for the operator.

Like all other s::can instruments the s::can spectrometer probes are intelligent instruments - using software controlled procedures it is even possible to identify any fouling on the measuring windows.

The s::can spectrometer instruments are fully capable spectrometers in the shape of a probe. In the measuring section, which is positioned between emitting and receiving units, the emitted light passes through the medium to be analysed. Substances present in the medium located in between the measuring windows of the probe adsorb visible and UV light. Internally a second light beam is guided across a comparison pathway. This two beam setup (see figure 2) makes it possible to compensate, with each single measurement, any instrumental effects that could influence the quality of the measurement (e.g. ageing of the light source).

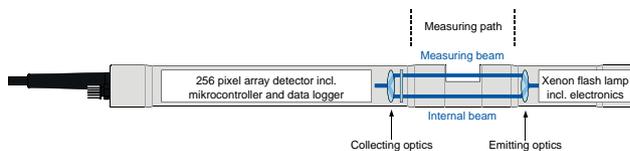


fig. 2: measuring path

s::can spectrometer probes record the complete absorbance spectrum between 190 and 720 nm (UV-Vis) or 190 - 390 nm (UV) resolving it into 256 wavelengths - the result is the “Fingerprint” (absorbance spectrum, see figure 1). Using the information contained in the fingerprint it is possible to monitor multiple parameters simultaneously and at the same time compensate these parameters for possible cross-sensitivities. The correlation with laboratory results reaches a quality that was unknown from the previously used simple optical instruments. Global Calibrations calculate the concentrations of multiple parameters from the Fingerprint and are available as application specific factory settings. Through the Global Calibrations each user benefits from many years of experience in applications similar to his own - in most cases no local calibration on site is required.


s::can spectrometer probes use no replaceable parts or consumables. Therefore, when operated properly there will be no costs for spare parts at all.

Its unrivalled measurement features in combination with the lowest possible total costs - initial cost and foreseeable operational costs - make the s::can spectrometer probe the most attractive solution available today.

# spectro::lyser V3

spectro::lyser® UV-Vis monitors depending on the application an individual selection of: TSS, TS, turbidity, color, TOC, DOC, BOD, COD, NO<sub>3</sub>-N, NO<sub>3</sub>, HS-, O<sub>3</sub>, CLD, UV254, fingerprints, spectral alarms and temperature

- measuring principle: UV-Vis spectrometry over the total range (190-750 nm)
- web server on board
- communicates directly with your mobile device via WLAN
- choose exactly the parameters you want to measure – unlimited number of parameters possible
- 8 GB onboard memory - capacity for logging data for many years
- improved optical performance - revolutionary precision
- fast measurement interval - every 30 seconds possible
- extremely power efficient - sleep mode for low energy consumption
- multiparameter probe with 1 mm, 5 mm or 35 mm optical path length, ideal for waste water, surface water and drinking water
- non aging optics, long term stable and maintenance free in operation
- factory precalibrated, local multi-point calibration possible
- automatic cleaning with compressed air or brush/ruck::sack
- no consumables
- automatic compensation against multiple cross-sensitivities by unique chemometrics (e.g. turbidity)
- simple web interface for visualization & operation

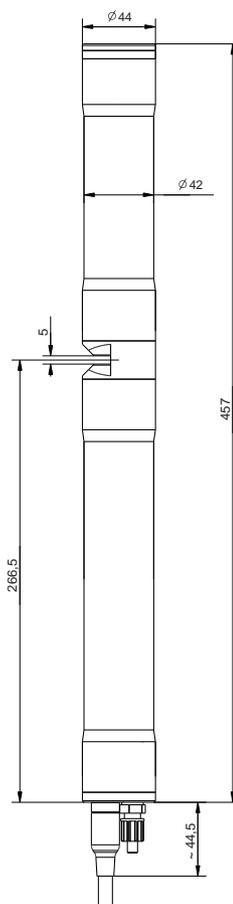

### technical specification

measuring principle	UV-Vis spectrometry 200 - 750 nm
measuring principle detail	xenon flash lamp, pixel array detector
measurement interval	30 sec (configurable, depending on application)
automatic compensation instrument	real dual beam measurement for compensation and detailed diagnostics
automatic compensation cross sensitivities	turbidity / solids / organic substances
precalibrated ex-works	all parameters
accuracy standard solution (>1 mg/l)	NO <sub>3</sub> -N: +/- 2% +1/OPL[mg/l]* COD-KHP: +/-2% +10/OPL[mg/l]* (* OPL ... optical pathlength in mm)
access to raw signals	access to spectral information
reference standard	distilled water
onboard memory	8 GB
integrated temperature sensor	0 ... 45 °C
resolution temperature sensor	0.1 °C
integration via	con::cube V3 con::nect V3 con::lyte V5 (D-320-pro2) and adapter cable (C-32-V3)
power supply	10 ... 18 VDC
power consumption (typical)	3 W
power consumption (sleep model)	60 mW
power consumption (max.)	20 W
interface to s::can terminals	M12 RSTS 8Y (IP67), RS485, Ethernet
interface to third party terminals	con::nect V3 incl. Modbus RTU, REST API, Modbus TCP/IP
digital interface (for cleaning devices)	1 digital in/out 1 digital out
internal sensors	supply voltage sensor, tilt sensor, rotation sensor

network connection	100Base-T Ethernet, WLAN
status information	RGB LED ring
cable length	1 m fixed cable (-010) or 7.5 m fixed cable (-075) or 15 m fixed cable (-150)
cable type	PU jacket
housing material	stainless steel 1.4404 (optional titanium)
window material	optical path length 5 and 1 mm: sapphire optical path length 35 mm: fused silica (UV-grade)
weight (min.)	3.4 kg (incl. cable)
dimensions (Ø x l)	optical path length 35 mm: 44 x 473 mm / 517.5 mm optical path length 5 mm: 44 x 457 mm / 501.5 mm optical path length 1 mm: 44 x 453 mm / 497.5 mm
operating temperature	0 ... 50 °C
operating pressure	0 ... 3 bar
installation / mounting	submersed or in a flow cell
flow velocity	3 m/s (max.)
mechanical stability	30 Nm
ingress protection class	IP68
automatic cleaning	media: compressed air or autobrush permissible pressure: 3 ... 6 bar
storage temperature	-10 ... 65 °C
conformity - environmental testing	EN 60721-3
conformity - EMC	EN 61326-1
conformity - RoHS 2	EN 50581
standard guarantee	1 years
extended guarantee (optional)	3 years

### recommended accessories


part number	article name
D-330-xxx	con::cube V3
B-33-012	con::nect V3
B-32-xxx	s::can compressor
B-44	cleaning valve
B-44-2	
C-32-V3	Adapter cable to connect a V3 spectrometer (M12) to V2 Terminal (MIL Plug)
F-110-V3	carrier s::can spectrometer V3 & V2 probe, 45°
F-48-V3	spectrometer V3 & V2 flow-cell (bypass setup), PVC
S-11-xx-moni	moni::tool Software
F-146-rs-x	ruck::sack (submersible Autobrush)

# The perfect accuracy for every application

The spectro::lyser V3 is available with three different optical path lengths.



drinking water:  
35 mm



surface water:  
5 mm



waste water:  
1 mm

## Optical information ring

The color of the optical information ring signals the state of the sensor.



everything  
okay



sensor in  
service mode



parameter or device  
error

## Wireless communication - lo::Tool

Intuitive web interface for data visualization and configuration of the spectro::lyser V3.



- Spectrometer Probes
- lo::scan
- Ionselective Probes
- Physical Probes
- Terminals
- Software
- System Configuration
- Monitoring Stations
- Spare Parts & Accessories
- Services & Solutions

**municipal WWTP influent & sewer**

		parameter													part number
		TSS [mg/l]	color (app) [Hazen]	color (tru) [Hazen]	TOC [mg/l]	DOC [mg/l]	BOD [mg/l]	COD [mg/l]	COD f [mg/l]	NO <sub>3</sub> -N [mg/l]	HS- [mg/l]	UV254 [Abs/m]	UV254 f [Abs/m]		
spectro::lyser™ V3 (1 mm OPL, UV-Vis)	min.	0	0	0	0	0	0	0	0	0	0	0	0	0	SP3-1-01-NO-xxx
	max.	8000	23000	14000	3300	2600	5300	10000	5300	100	80	3300	2800		
spectro::lyser™ V3 (5 mm OPL, UV-Vis)	min.	0	0	0	0	0	0	0	0	0	0	0	0	SP3-1-05-NO-xxx	
	max.	1200	3500	2100	500	400	800	1500	800	16	12	500	420		

**municipal WWTP aeration**

		parameter						part number
		TS [g/l]	COD f [mg/l]	NO <sub>3</sub> -N [mg/l]	UV254 [Abs/m]	UV254 f [Abs/m]		
spectro::lyser™ V3 (1 mm OPL, UV-Vis)	min.	0	0	0	0	0	SP3-1-01-NO-xxx	
	max.	20	530	26	3300	2800		

**municipal WWTP effluent**

		parameter													part number
		TSS [mg/l]	turbidity [NTU/FTU]	color (app) [Hazen]	color (tru) [Hazen]	TOC [mg/l]	DOC [mg/l]	BOD [mg/l]	COD [mg/l]	COD f [mg/l]	NO <sub>3</sub> -N [mg/l]	O <sub>3</sub> [mg/l]	UV254 [Abs/m]	UV254 f [Abs/m]	
spectro::lyser™ V3 (1 mm OPL, UV-Vis)	min.	0	0	0	0	0	0	0	0	0	0	0	0	0	SP3-1-01-NO-xxx
	max.	4000	8000	23000	14000	2600	2000	2000	3300	2000	300	1200	3300	2800	
spectro::lyser™ V3 (5 mm OPL, UV-Vis)	min.	0	0	0	0	0	0	0	0	0	0	0	0	0	SP3-1-05-NO-xxx
	max.	600	1200	3500	2100	400	300	300	500	300	45	180	500	420	

**paper mill WWTP influent**

		parameter							part number
		TSS [mg/l]	COD [mg/l]	COD f [mg/l]	NO <sub>3</sub> -N [mg/l]	UV254 [Abs/m]	UV254 f [Abs/m]		
spectro::lyser™ V3 (1 mm OPL, UV-Vis)	min.	0	0	0	0	0	0	SP3-1-01-NO-xxx	
	max.	8000	13000	11000	100	3300	2800		
spectro::lyser™ V3 (5 mm OPL, UV-Vis)	min.	0	0	0	0	0	0	SP3-1-05-NO-xxx	
	max.	1200	2000	1700	16	500	420		

**paper mill WWTP effluent**

		parameter						part number
		TSS [mg/l]	COD [mg/l]	COD f [mg/l]	NO <sub>3</sub> -N [mg/l]	UV254 [Abs/m]	UV254 f [Abs/m]	
spectro::lyser™ V3 (1 mm OPL, UV-Vis)	min.	0	0	0	0	0	0	SP3-1-01-NO-xxx
	max.	4000	5300	3300	100	3300	2800	
spectro::lyser™ V3 (5 mm OPL, UV-Vis)	min.	0	0	0	0	0	0	SP3-1-05-NO-xxx
	max.	600	790	490	16	500	420	

**brewery WWTP influent**

		parameter						part number
		TSS [mg/l]	COD [mg/l]	COD f [mg/l]	NO <sub>3</sub> -N [mg/l]	UV254 [Abs/m]	UV254 f [Abs/m]	
spectro::lyser™ V3 (1 mm OPL, UV-Vis)	min.	0	0	0	0	0	0	SP3-1-01-NO-xxx
	max.	13000	60000	53000	100	3300	2800	
spectro::lyser™ V3 (5 mm OPL, UV-Vis)	min.	0	0	0	0	0	0	SP3-1-05-NO-xxx
	max.	2000	9000	7900	16	500	420	

**dairy WWTP influent**


		parameter						part number
		TSS [mg/l]	COD [mg/l]	COD f [mg/l]	NO <sub>3</sub> -N [mg/l]	UV254 [Abs/m]	UV254 f [Abs/m]	
spectro::lyser™ V3 (1 mm OPL, UV-Vis)	min.	0	0	0	0	0	0	SP3-1-01-NO-xxx
	max.	8000	33000	16000	210	3300	2800	

# spectro::lyser V3 (UV)

- measuring principle: UV spectrometry over the total range (200-390 nm)
- web server on board - IoT enabled, no user software is needed to configure the probe
- communicates directly with your mobile device via WLAN
- choose exactly the parameters you want to measure – unlimited number of parameters possible
- 8 GB onboard memory - capacity for logging data for many years
- improved optical performance - revolutionary precision
- fast measurement interval - every 30 seconds possible
- extremely power efficient - sleep mode for low energy consumption
- multiparameter probe with 1 mm, 5 mm or 35 mm optical path length, ideal for waste water, surface water and drinking water
- non aging optics, long term stable and maintenance free in operation
- factory precalibrated, local multi-point calibration possible
- automatic cleaning with compressed air or brush/ruck::sack
- simple web interface for visualization & operation - lo::Tool

**recommended accessories**

part number	article name
D-500-012	con::line
D-330-xxx	con::cube V3
B-33-012	con::nect V3
B-32-xxx	s::can compressor
B-44	cleaning valve
B-44-2	
C-32-V3	Adapter cable to connect a V3 spectrometer (M12) to V2 Terminal (MIL Plug)
F-110-V3	carrier s::can spectrometer V3 & V2 probe, 45°
F-48-V3	spectrometer V3 & V2 flow-cell (bypass setup), PVC
S-11-xx-moni	moni::tool Software
F-146-rs-x	ruck::sack (submersible Autobrush)

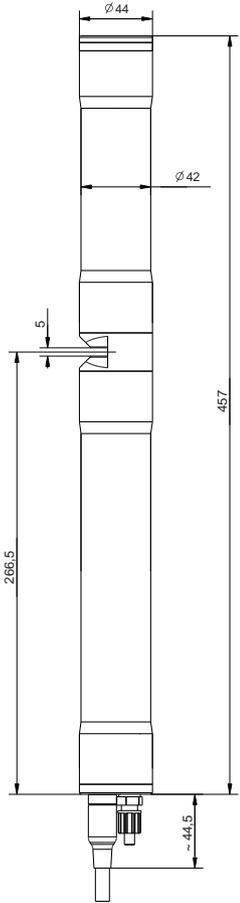

## technical specification

measuring principle	UV spectrometry (200 - 390 nm)	network connection	100Base-T Ethernet, WLAN
automatic compensation instrument	real dual beam measurement for compensation and detailed diagnostics	status information	RGB LED ring
automatic compensation cross sensitivities	solids / organic substances	cable length	1 m fixed cable (-010) or 7.5 m fixed cable (-075) or 15 m fixed cable (-150)
precalibrated ex-works	all parameters	cable type	PU jacket
accuracy standard solution (>1 mg/l)	NO <sub>3</sub> -N: +/- 2% +1/OPL[mg/l]* COD-KHP: +/-2% +10/OPL[mg/l]* (* OPL ... optical pathlength in mm)	housing material	stainless steel 1.4404
access to raw signals	access to spectral information	window material	optical path length 5 and 1 mm: sapphire optical path length 35 mm: fused silica (UV-grade)
reference standard	distilled water	weight (min.)	3.4 kg (incl. cable)
onboard memory	8 GB	dimensions (Ø x l)	optical path length 35 mm: 44 x 473 mm / 517.5 mm optical path length 5 mm: 44 x 457 mm / 501.5 mm optical path length 1 mm: 44 x 453 mm / 497.5 mm
integrated temperature sensor	0 ... 45 °C	operating temperature	0 ... 45 °C
resolution temperature sensor	0.1 °C	operating pressure	0 ... 3 bar
integration via	con::cube V3 con::nect V3 con::lyte V5 (D-320-pro2) and adapter cable (C-32-V3) con::line	installation / mounting	submersed or in a flow cell
power supply	10 ... 18 VDC	flow velocity	3 m/s (max.)
power consumption (typical)	3 W	mechanical stability	30 Nm
power consumption (sleep model)	60 mW	ingress protection class	IP68
power consumption (max.)	20 W	automatic cleaning	media: compressed air or autobrush permissible pressure: 3 ... 6 bar
interface to s::can terminals	M12 RSTS 8Y (IP67), RS485, Ethernet	storage temperature	-10 ... 65 °C
interface to third party terminals	con::nect V3 incl. Modbus RTU, REST API, Modbus TCP/IP	conformity - environmental testing	EN 60721-3
digital interface (for cleaning devices)	1 digital in/out 1 digital out	conformity - EMC	EN 61326-1
internal sensors	supply voltage sensor, tilt sensor, rotation sensor	conformity - RoHS 2	EN 50581
		standard guarantee	1 year
		extended guarantee (optional)	3 years

## municipal WWTP influent

		parameter					part number
		TSS est [mg/l]	COD [mg/l]	NO <sub>2</sub> -N [mg/l]	NO <sub>3</sub> -N [mg/l]	UV254 [Abs/m]	
spectro::lyser V3 UV (01 mm OPL)	min.	0	0	0	0	0	SP3-2-01-NO-xxx
	max.	8000	10000	80	100	3300	
spectro::lyser V3 UV (05 mm OPL)	min.	0	0	0	0	0	SP3-2-05-NO-xxx
	max.	1200	1500	12	16	500	

## municipal WWTP effluent

		parameter					part number
		TSS est [mg/l]	COD [mg/l]	NO <sub>2</sub> -N [mg/l]	NO <sub>3</sub> -N [mg/l]	UV254 [Abs/m]	
spectro::lyser V3 UV (01 mm OPL)	min.	0	0	0	0	0	SP3-2-01-NO-xxx
	max.	2300	3300	130	300	3300	
spectro::lyser V3 UV (05 mm OPL)	min.	0	0	0	0	0	SP3-2-05-NO-xxx
	max.	350	500	20	45	500	
spectro::lyser V3 UV (35 mm OPL)	min.	0	0	0	0	0	SP3-2-35-NO-xxx
	max.	50	70	2.8	6.4	70	

## municipal WWTP aeration


		parameter					part number
		TS [mg/l]	COD f [mg/l]	NO <sub>2</sub> -N [mg/l]	NO <sub>3</sub> -N [mg/l]	UV254 [Abs/m]	
spectro::lyser V3 UV (01 mm OPL)	min.	0	0	0	0	0	SP3-2-01-NO-xxx
	max.	8000	2600	240	120	3300	
spectro::lyser V3 UV (05 mm OPL)	min.	0	0	0	0	0	SP3-2-05-NO-xxx
	max.	1200	400	36	18	500	

# carbo::lyser™ II / III - V3

carbo::lyser™ II monitors 2 of the following parameters: TSS, TS, TOC, DOC, BOD, COD, COD f, UV254 and UV254 f

carbo::lyser™ III monitors 3 of the following parameters: TSS, TOC, DOC, BOD, COD, COD f, UV254 and UV254 f

- measuring principle: UV-Vis spectrometry over the total range (190-750 nm)
- web server on board - IoT enabled, no user software is needed to configure the probe
- communicates directly with your mobile device via WLAN
- 8 GB onboard memory - capacity for logging data for many years
- improved optical performance - revolutionary precision
- fast measurement interval - every 30 seconds possible
- extremely power efficient - sleep mode for low energy consumption
- multiparameter probe with 1 mm, 5 mm or 35 mm optical path length, ideal for waste water, surface water and drinking water
- long term stable and maintenance free in operation
- factory precalibrated, local multi-point calibration possible
- automatic cleaning with compressed air or brush

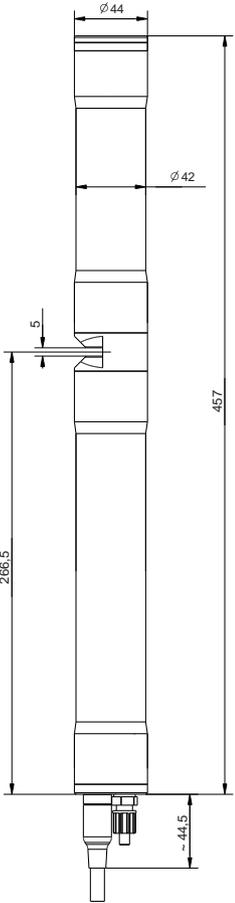

recommended accessories	
part number	article name
D-330-xxx	con::cube V3
D-320-pro2-230	con::lyte pro
B-33-012	con::nect V3
B-32-xxx	s::can compressor
B-44	cleaning valve
B-44-2	
C-32-V3	Adapter cable to connect a V3 spectrometer (M12) to V2 Terminal (MIL Plug)
F-110-V3	carrier s::can spectrometer V3 & V2 probe, 45°
F-120-V3	carrier s::can spectrometer V3 & V2 probe, vertical attachment
F-48-V3	spectrometer V3 & V2 flow-cell (bypass setup), PVC
S-11-xx-moni	moni::tool Software
F-146-rs-x	ruck::sack (submersible Autobrush)

### technical specification

measuring principle	UV-Vis spectrometry 200 - 750 nm	cable length	1 m fixed cable (-010) or 7.5 m fixed cable (-075) or 15 m fixed cable (-150)
measurement interval	30 sec (configurable, depending on application)	cable type	PU jacket
automatic compensation cross sensitivities	turbidity / solids / organic substances	housing material	stainless steel 1.4404 (optional titanium)
precalibrated ex-works	all parameters	window material	optical path length 5 and 1 mm: sapphire optical path length 35 mm: fused silica (UV-grade)
accuracy standard solution (>1 mg/l)	NO <sub>3</sub> -N: +/- 3% +1/OPL[mg/l]* COD-KHP: +/-3% +10/OPL[mg/l]* (* OPL ... optical pathlength in mm)	weight (min.)	3.4 kg (incl. cable)
access to raw signals	no	dimensions (Ø x l)	optical path length 35 mm: 44 x 473 mm / 517.5 mm optical path length 5 mm: 44 x 457 mm / 501.5 mm optical path length 1 mm: 44 x 453 mm / 497.5 mm
reference standard	distilled water	operating temperature	0 ... 50 °C
onboard memory	8 GB	operating pressure	0 ... 5 bar
integrated temperature sensor	0 ... 45 °C	high pressure specification (optional)	10 bar
resolution temperature sensor	0.1 °C	installation / mounting	submersed or in a flow cell
integration via	con::cube V3 con::nect V3 con::lyte V5 (D-320-pro2) and adapter cable (C-32-V3)	flow velocity	3 m/s (max.)
power supply	10 ... 18 VDC	mechanical stability	30 Nm
power consumption (typical)	3 W	ingress protection class	IP68
power consumption (sleep model)	60 mW	automatic cleaning	media: compressed air or autobrush permissible pressure: 3 ... 6 bar
power consumption (max.)	20 W	storage temperature	-10 ... 65 °C
interface to s::can terminals	M12 RSTS 8Y (IP67), RS485, Ethernet	conformity - environmental testing	EN 60721-3
interface to third party terminals	con::nect V3 incl. Modbus RTU, REST API, Modbus TCP/IP	conformity - EMC	EN 61326-1
digital interface (for cleaning devices)	1 digital in/out 1 digital out	conformity - RoHS 2	EN 50581
internal sensors	supply voltage sensor, tilt sensor, rotation sensor	standard guarantee	1 years
network connection	100Base-T Ethernet, WLAN	extended guarantee (optional)	3 years
status information	RGB LED ring		

### municipal WWTP influent & sewer

		parameter								part number
		TSS [mg/l]	TOC [mg/l]	DOC [mg/l]	BOD [mg/l]	COD [mg/l]	COD f [mg/l]	UV254 [Abs/m]	UV254 f [Abs/m]	
carbo::lyser™ II (2 parameters, 1 mm OPL)	min.	0	0	0	0	0	0	0	0	G3-C2-I-01-NO-xxx
	max.	8000	3300	2600	5300	10000	5300	3300	2800	
carbo::lyser™ II (2 parameters, 5 mm OPL)	min.	0	0	0	0	0	0	0	0	G3-C2-I-05-NO-xxx
	max.	1200	500	400	800	1500	800	500	420	
carbo::lyser™ III (3 parameters, 1mm OPL)	min.	0	0	0	0	0	0	0	0	G3-C3-I-01-NO-xxx
	max.	8000	3300	2300	5300	10000	5300	3300	2800	
carbo::lyser™ III (3 parameters, 5 mm OPL)	min.	0	0	0	0	0	0	0	0	G3-C3-I-05-NO-xxx
	max.	1200	500	400	800	1500	800	500	420	

### municipal WWTP effluent

		parameter								part number
		TSS [mg/l]	TOC [mg/l]	DOC [mg/l]	BOD [mg/l]	COD [mg/l]	COD f [mg/l]	UV254 [Abs/m]	UV254 f [Abs/m]	
carbo::lyser™ II (2 parameters, 5 mm OPL)	min.	0	0	0	0	0	0	0	0	G3-C2-E-05-NO-xxx
	max.	600	400	300	300	500	300	500	420	
carbo::lyser™ III (3 parameters, 5 mm OPL)	min.	0	0	0	0	0	0	0	0	G3-C3-E-05-NO-xxx
	max.	600	400	300	300	500	300	500	420	


# multi::lyser™ IV - V3

multi::lyser™ IV monitors 4 of the following parameters: TSS, TS, TOC, DOC, BOD, COD, COD f, NO3-N, UV254 and UV254 f

- measuring principle: UV-Vis spectrometry over the total range (190-750 nm)
- web server on board - IoT enabled, no user software is needed to configure the probe
- communicates directly with your mobile device via WLAN
- 8 GB onboard memory - capacity for logging data for many years
- improved optical performance - revolutionary precision
- fast measurement interval - every 30 seconds possible
- extremely power efficient - sleep mode for low energy consumption
- multiparameter probe with 1 mm, 5 mm or 35 mm optical path length, ideal for waste water, surface water and drinking water
- long term stable and maintenance free in operation
- factory precalibrated, local multi-point calibration possible
- automatic cleaning with compressed air or brush

### recommended accessories

part number	article name
D-330-xxx	con::cube V3
D-320-pro2-230	con::lyte pro
B-33-012	con::nect V3
B-32-xxx	s::can compressor
B-44	cleaning valve
B-44-2	
C-32-V3	Adapter cable to connect a V3 spectrometer (M12) to V2 Terminal (MIL Plug)
F-110-V3	carrier s::can spectrometer V3 & V2 probe, 45°
F-120-V3	carrier s::can spectrometer V3 & V2 probe, vertical attachment
F-48-V3	spectrometer V3 & V2 flow-cell (bypass setup), PVC
S-11-xx-moni	moni::tool Software
F-146-rs-x	ruck::sack (submersible Autobrush)

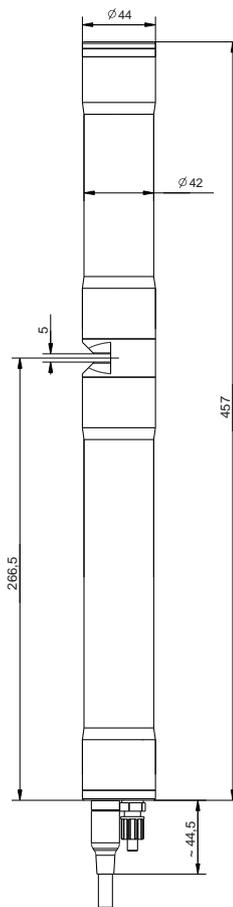

### technical specification

measuring principle	UV-Vis spectrometry 200 - 750 nm	cable length	1 m fixed cable (-010) or 7.5 m fixed cable (-075) or 15 m fixed cable (-150)
measurement interval	30 sec (configurable, depending on application)	cable type	PU jacket
automatic compensation cross sensitivities	turbidity / solids / organic substances	housing material	stainless steel 1.4404 (optional titanium)
precalibrated ex-works	all parameters	window material	optical path length 5 and 1 mm: sapphire optical path length 35 mm: fused silica (UV-grade)
accuracy standard solution (>1 mg/l)	NO <sub>3</sub> -N: +/- 3% +1/OPL[mg/l]* COD-KHP: +/-3% +10/OPL[mg/l]* (* OPL ... optical pathlength in mm)	weight (min.)	3.4 kg (incl. cable)
access to raw signals	no	dimensions (Ø x l)	optical path length 35 mm: 44 x 473 mm / 517.5 mm optical path length 5 mm: 44 x 457 mm / 501.5 mm optical path length 1 mm: 44 x 453 mm / 497.5 mm
reference standard	distilled water	operating temperature	0 ... 50 °C
onboard memory	8 GB	operating pressure	0 ... 5 bar
integrated temperature sensor	0 ... 45 °C	high pressure specification (optional)	10 bar
resolution temperature sensor	0.1 °C	installation / mounting	submersed or in a flow cell
integration via	con::cube V3 con::nect V3 con::lyte V5 (D-320-pro2) and adapter cable (C-32-V3)	flow velocity	3 m/s (max.)
power supply	10 ... 18 VDC	mechanical stability	30 Nm
power consumption (typical)	3 W	ingress protection class	IP68
power consumption (sleep model)	60 mW	automatic cleaning	media: compressed air or autobrush permissible pressure: 3 ... 6 bar
power consumption (max.)	20 W	storage temperature	-10 ... 65 °C
interface to s::can terminals	M12 RSTS 8Y (IP67), RS485, Ethernet	conformity - environmental testing	EN 60721-3
interface to third party terminals	con::nect V3 incl. Modbus RTU, REST API, Modbus TCP/IP	conformity - EMC	EN 61326-1
digital interface (for cleaning devices)	1 digital in/out 1 digital out	conformity - RoHS 2	EN 50581
internal sensors	supply voltage sensor, tilt sensor, rotation sensor	standard guarantee	1 years
network connection	100Base-T Ethernet, WLAN	extended guarantee (optional)	3 years
status information	RGB LED ring		

### municipal WWTP influent & sewer

		parameter										part number
		TSS [mg/l]	TOC [mg/l]	DOC [mg/l]	BOD [mg/l]	COD [mg/l]	COD f [mg/l]	NO <sub>3</sub> -N [mg/l]	NO <sub>3</sub> [mg/l]	UV254 [Abs/m]	UV254 f [Abs/m]	
multi::lyser™ IV (4 parameters, 1 mm OPL)	min.	0	0	0	0	0	0	0	0	0	0	G3-M4-I-01-NO-xxx
	max.	8000	3300	2600	5300	10000	5300	100	460	3300	2800	
multi::lyser™ IV (4 parameters, 5 mm OPL)	min.	0	0	0	0	0	0	0	0	0	0	G3-M4-I-05-NO-xxx
	max.	1200	500	400	800	1500	800	16	70	500	420	

### municipal WWTP aeration

		parameter				part number
		TS [g/l]	COD f [mg/l]	NO <sub>3</sub> -N [mg/l]	NO <sub>3</sub> [mg/l]	
multi::lyser™ IV (4 parameters, 1 mm OPL)	min.	0	0	0	0	G3-M4-A-01-NO-xxx
	max.	20	530	26	110	

### municipal WWTP effluent

		parameter										part number
		TSS [mg/l]	TOC [mg/l]	DOC [mg/l]	BOD [mg/l]	COD [mg/l]	COD f [mg/l]	NO <sub>3</sub> -N [mg/l]	NO <sub>3</sub> [mg/l]	UV254 [Abs/m]	UV254 f [Abs/m]	
multi::lyser™ IV (4 parameters, 5 mm OPL)	min.	0	0	0	0	0	0	0	0	0	0	G3-M4-E-05-NO-xxx
	max.	600	400	300	300	500	300	45	190	500	420	


# nitro::lyser™ II - V3

nitro::lyser™ II monitors 2 of the following parameters: TSS, TS, NO<sub>3</sub>-N and NO<sub>3</sub>

- measuring principle: UV-Vis spectrometry over the total range (190-750 nm)
- web server on board - IoT enabled, no user software is needed to configure the probe
- communicates directly with your mobile device WLAN
- 8 GB onboard memory - capacity for logging data for many years
- improved optical performance - revolutionary precision
- fast measurement interval - every 30 seconds possible
- extremely power efficient - sleep mode for low energy consumption
- multiparameter probe with 1 mm, 5 mm or 35 mm optical path length, ideal for waste water, surface water and drinking water
- long term stable and maintenance free in operation
- factory precalibrated, local multi-point calibration possible
- automatic cleaning with compressed air or brush

### recommended accessories

part number	article name
D-330-xxx	con::cube V3
D-320-pro2-230	con::lyte pro
B-33-012	con::nect V3
B-32-xxx	s::can compressor
B-44	cleaning valve
B-44-2	
C-32-V3	Adapter cable to connect a V3 spectrometer (M12) to V2 Terminal (MIL Plug)
F-110-V3	carrier s::can spectrometer V3 & V2 probe, 45°
F-120-V3	carrier s::can spectrometer V3 & V2 probe, vertical attachment
F-48-V3	spectrometer V3 & V2 flow-cell (bypass setup), PVC
S-11-xx-moni	moni::tool Software
F-146-rs-x	ruck::sack (submersible Autobrush)

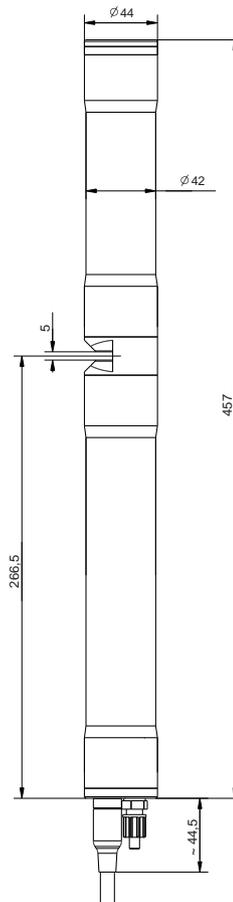

### technical specification

measuring principle	UV-Vis spectrometry 200 - 750 nm
measurement interval	30 sec (configurable, depending on application)
automatic compensation cross sensitivities	turbidity / solids / organic substances
precalibrated ex-works	all parameters
accuracy standard solution (>1 mg/l)	NO <sub>3</sub> -N: +/- 3% +1/OPL[mg/l]* COD-KHP: +/-3% +10/OPL[mg/l]* (* OPL ... optical pathlength in mm)
access to raw signals	no
reference standard	distilled water
onboard memory	8 GB
integrated temperature sensor	0 ... 45 °C
resolution temperature sensor	0.1 °C
integration via	con::cube V3 con::nect V3 con::lyte V5 (D-320-pro2) and adapter cable (C-32-V3)
power supply	10 ... 18 VDC
power consumption (typical)	3 W
power consumption (sleep model)	60 mW
power consumption (max.)	20 W
interface to s::can terminals	M12 RSTS 8Y (IP67), RS485, Ethernet
interface to third party terminals	con::nect V3 incl. Modbus RTU, REST API, Modbus TCP/IP
digital interface (for cleaning devices)	1 digital in/out 1 digital out
internal sensors	supply voltage sensor, tilt sensor, rotation sensor
status information	RGB LED ring

cable length	1 m fixed cable (-010) or 7.5 m fixed cable (-075) or 15 m fixed cable (-150)
cable type	PU jacket
housing material	stainless steel 1.4404 (optional titanium)
window material	optical path length 5 and 1 mm: sapphire optical path length 35 mm: fused silica (UV-grade)
weight (min.)	3.4 kg (incl. cable)
dimensions (Ø x l)	optical path length 35 mm: 44 x 473 mm / 517.5 mm optical path length 5 mm: 44 x 457 mm / 501.5 mm optical path length 1 mm: 44 x 453 mm / 497.5 mm
operating temperature	0 ... 50 °C
operating pressure	0 ... 5 bar
high pressure specification (optional)	10 bar
installation / mounting	submersed or in a flow cell
flow velocity	3 m/s (max.)
mechanical stability	30 Nm
ingress protection class	IP68
automatic cleaning	media: compressed air or autobrush permissible pressure: 3 ... 6 bar
storage temperature	-10 ... 65 °C
conformity - environmental testing	EN 60721-3
conformity - EMC	EN 61326-1
conformity - RoHS 2	EN 50581
standard guarantee	1 years
extended guarantee (optional)	3 years

### municipal WWTP influent & sewer

		parameter			
		TSS [mg/l]	NO <sub>3</sub> -N [mg/l]	NO <sub>3</sub> [mg/l]	part number
nitro::lyser™ II (2 parameters, 1 mm OPL)	min.	0	0	0	G3-N2-I-01-NO-xxx
	max.	8000	100	460	
nitro::lyser™ II (2 parameters, 5 mm OPL)	min.	0	0	0	G3-N2-I-05-NO-xxx
	max.	1200	16	70	

### municipal WWTP aeration

		parameter			
		TS [g/l]	NO <sub>3</sub> -N [mg/l]	NO <sub>3</sub> [mg/l]	part number
nitro::lyser™ II (2 parameters, 1 mm OPL)	min.	0	0	0	G3-N2-A-01-NO-xxx
	max.	20	26	110	

### municipal WWTP effluent

		parameter			
		TSS [mg/l]	NO <sub>3</sub> -N [mg/l]	NO <sub>3</sub> [mg/l]	part number
nitro::lyser™ II (2 parameters, 5 mm OPL)	min.	0	0	0	G3-N2-E-05-NO-xxx
	max.	600	45	190	


# uv::lyser V - V3

uv::lyser V monitors TSS and up to 4 freely selectable wavelenghts

- measuring principle: UV-Vis spectrometry over the total range (190-750 nm)
- web server on board - IoT enabled, no user software is needed to configure the probe
- communicates directly with your mobile device via WLAN
- 8 GB onboard memory - capacity for logging data for many years
- improved optical performance - revolutionary precision
- fast measurement interval - every 30 seconds possible
- extremely power efficient - sleep mode for low energy consumption
- multiparameter probe with 1 mm, 5 mm or 35 mm optical path length, ideal for waste water, surface water and drinking water
- long term stable and maintenance free in operation
- factory precalibrated, local multi-point calibration possible
- automatic cleaning with compressed air or brush
- field calibration for COD and BOD parameters for selected ranges possible (range depending on OPL/application)

## recommended accessories

part number	article name
D-330-xxx	con::cube V3
D-320-pro2-230	con::lyte pro
B-33-012	con::nect V3
B-32-xxx	s::can compressor
B-44	cleaning valve
B-44-2	
C-32-V3	Adapter cable to connect a V3 spectrometer (M12) to V2 Terminal (MIL Plug)
F-110-V3	carrier s::can spectrometer V3 & V2 probe, 45°
F-120-V3	carrier s::can spectrometer V3 & V2 probe, vertical attachment
F-48-V3	spectrometer V3 & V2 flow-cell (bypass setup), PVC
S-11-xx-moni	moni::tool Software
F-146-rs-x	ruck::sack (submersible Autobrush)

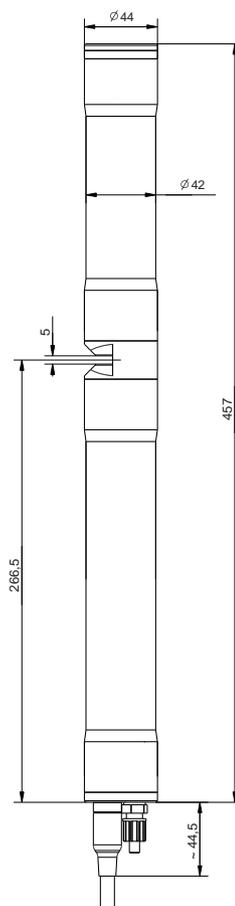

technical specification			
measuring principle	UV-Vis spectrometry 200 - 750 nm	cable length	1 m fixed cable (-010) or 7.5 m fixed cable (-075) or 15 m fixed cable (-150)
measurement interval	30 sec (configurable, depending on application)	cable type	PU jacket
automatic compensation cross sensitivities	turbidity / solids / organic substances	housing material	stainless steel 1.4404 (optional titanium)
precalibrated ex-works	all parameters	window material	optical path length 5 and 1 mm: sapphire optical path length 35 mm: fused silica (UV-grade)
accuracy standard solution (>1 mg/l)	NO <sub>3</sub> -N: +/- 3% +1/OPL[mg/l]* COD-KHP: +/-3% +10/OPL[mg/l]* (* OPL ... optical pathlength in mm)	weight (min.)	3.4 kg (incl. cable)
access to raw signals	no	dimensions (Ø x l)	optical path length 35 mm: 44 x 473 mm / 517.5 mm optical path length 5 mm: 44 x 457 mm / 501.5 mm optical path length 1 mm: 44 x 453 mm / 497.5 mm
reference standard	distilled water	operating temperature	0 ... 50 °C
onboard memory	8 GB	operating pressure	0 ... 5 bar
integrated temperature sensor	0 ... 45 °C	high pressure specification (optional)	10 bar
resolution temperature sensor	0.1 °C	installation / mounting	submersed or in a flow cell
integration via	con::cube V3 con::nect V3 con::lyte V5 (D-320-pro2) and adapter cable (C-32-V3)	flow velocity	3 m/s (max.)
power supply	10 ... 18 VDC	mechanical stability	30 Nm
power consumption (typical)	3 W	ingress protection class	IP68
power consumption (sleep model)	60 mW	automatic cleaning	media: compressed air or autobrush permissible pressure: 3 ... 6 bar
power consumption (max.)	20 W	storage temperature	-10 ... 65 °C
interface to s::can terminals	M12 RSTS 8Y (IP67), RS485, Ethernet	conformity - environmental testing	EN 60721-3
interface to third party terminals	con::nect V3 incl. Modbus RTU, REST API, Modbus TCP/IP	conformity - EMC	EN 61326-1
digital interface (for cleaning devices)	1 digital in/out 1 digital out	conformity - RoHS 2	EN 50581
internal sensors	supply voltage sensor, tilt sensor, rotation sensor	standard guarantee	1 years
network connection	100Base-T Ethernet, WLAN	extended guarantee (optional)	3 years
status information	RGB LED ring		

#### municipal WWTP influent & sewer

		parameter			
		TSS [mg/l]	UV254 [Abs/m]	UV254 f [Abs/m]	part number
uv::lyser V (5 parameters, 5 mm OPL)	min.	0	0	0	G3-U5-I-05-NO-xxx
	max.	1200	500	420	
uv::lyser V (5 parameters, 1 mm OPL)	min.	0	0	0	G3-U5-I-01-NO-xxx
	max.	8000	3300	2800	

#### municipal WWTP effluent

		parameter			
		TSS [mg/l]	UV254 [Abs/m]	UV254 f [Abs/m]	part number
uv::lyser V (5 parameters, 5 mm OPL)	min.	0	0	0	G3-U5-E-05-NO-xxx
	max.	600	500	420	

# spectro::lyser™ industrial

spectro::lyser™ industrial monitors depending on the application an individual selection of: TSS, turbidity, NO<sub>3</sub>-N, COD, BOD, TOC, DOC, UV254, NO<sub>2</sub>-N, color, BTX, O<sub>3</sub>, HS-, AOC, fingerprints, spectral alarms and temperature

- s::can plug & measure
- measuring principle: UV-Vis spectrometry over the total range (190-750 nm)
- ideal for industrial waste water and sewer applications
- factory precalibrated, with advanced calibration service included
- long term stable and maintenance free in operation
- automatic cleaning with compressed air
- mounting and measurement directly in the media (InSitu) or in a flow cell (monitoring station)
- adaption of optical path lengths to 35 mm, 15 mm, 5 mm, 2 mm, 1 mm or 0.5 mm possible
- easy mounting without clogging
- Suitable for use in hazardous areas where explosive atmospheres are present: zone 1 & 2




up to 10 bar  
operating pressure



explosion proof  
specification



advanced calibration  
service

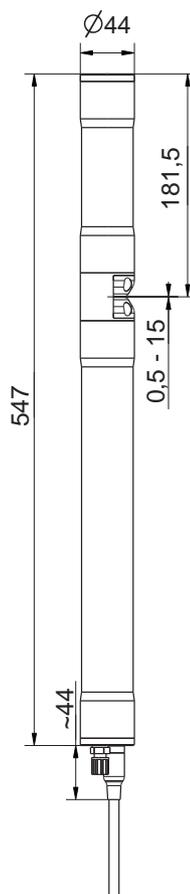

recommended accessories	
part number	article name
D-330-xxx	con::cube V3
B-32-xxx	s::can compressor
F-120-V3	carrier s::can spectrometer V3 & V2 probe, vertical attachment
F-48-V3	spectrometer V3 & V2 flow-cell (bypass setup), PVC
S-11-xx-moni	moni::tool Software
C-32-MIL	Adapter cable to connect a V2 spectrometer (MIL) to V3 Terminal (M12)

### technical specification

measuring principle	UV-Vis spectrometry 190 - 750 nm UV spectrometry 190 - 390 nm	cable type	PU jacket
measuring principle detail	xenon flash lamp, 256 photo diodes	housing material	stainless steel 1.4404
automatic compensation instrument	two beam measurement, complete spectrum	window material	optical path length 5 ... 0.5 mm: sapphire optical path length 35 mm: fused silica (UV-grade)
automatic compensation cross sensitivities	turbidity / solids / organic substances	weight (min.)	3.4 kg (incl. cable)
precalibrated ex-works	all parameters	dimensions (Ø x l)	44 mm x 547 mm / 591 mm
accuracy standard solution (>1 mg/l)	NO <sub>3</sub> -N: +/- 2% +1/OPL[mg/l]* COD-KHP: +/-2% +10/OPL[mg/l]* (* OPL ... optical pathlength in mm)	operating temperature	0 ... 45 °C
access to raw signals	access to spectral information	operating pressure	0 ... 10 bar
reference standard	distilled water	explosion proof specification (optional)	RL 2014/34/EU, TÜV-A 12ATEX0001 X ATEX Marking: II 2 G Ex db IIC T6 Gb
onboard memory	656 KB	installation / mounting	submersed or in a flow cell
integrated temperature sensor	-10 ... 50 °C	flow velocity	3 m/s (max.)
resolution temperature sensor	0.1 °C	mechanical stability	30 Nm
integration via	con::lyte con::nect	ingress protection class	IP68
power supply	11 ... 15 VDC	automatic cleaning	media: compressed air or autobrush
power consumption (typical)	4.2 W	storage temperature	-10 ... 50 °C
power consumption (max.)	20 W	conformity - EMC	EN 61326-1, EN 61326-2-3
interface to s::can terminals	MIL connector, RS485	conformity - safety	EN 61010-1
interface to third party terminals	con::nect incl. gateway modbusRTU	standard guarantee	1 years
cable length	7.5 m fixed cable (-075) or 1 m fixed cable (-010)	extended guarantee (optional)	3 years

### paper mill WWTP influent

		parameter					part number
		TSS [mg/l]	COD [mg/l]	COD f [mg/l]	UV254 [Abs/m]	UV254 f [Abs/m]	
spectro::lyser™ UV-Vis (TSS, COD, CODf, UV254, UV254f)	min.	0	0	0	0	0	SP-1-002-p0-s-EX-010 / -075 (incl. Global Calibration p1)
	max.	3000	5000	4250	1250	1000	

### paper mill WWTP effluent

		parameter						part number
		TSS [mg/l]	COD [mg/l]	COD f [mg/l]	NO <sub>3</sub> -N [mg/l]	UV254 [Abs/m]	UV254 f [Abs/m]	
spectro::lyser™ UV-Vis (TSS, NO <sub>3</sub> -N, COD, CODf, UV254, UV254f)	min.	0	0	0	0	0	0	SP-1-002-p0-s-EX-010 / -075 (incl. Global Calibration q1)
	max.	1000	350	350	10	1250	1000	

### brewery WWTP influent

		parameter				part number
		TSS [mg/l]	COD [mg/l]	UV254 [Abs/m]	UV254 f [Abs/m]	
spectro::lyser™ UV-Vis (TSS, COD, UV254, UV254f)	min.	0	0	0	0	SP-1-002-p0-s-EX-010 / -075 (incl. Global Calibration b1)
	max.	5000	45000	1250	1000	

### municipal sewer

		parameter								part number
		TSS [mg/l]	BOD [mg/l]	COD [mg/l]	COD f [mg/l]	NO <sub>3</sub> -N [mg/l]	HS- [mg/l]	UV254 [Abs/m]	UV254 f [Abs/m]	
spectro::lyser™ UV-Vis (TSS, NO <sub>3</sub> -N, COD, BOD, UV254, UV254f)	min.	0	0	0	0	0	0	0	0	SP-1-002-p0-s-EX-010 / -075 (incl. Global Calibration i3)
	max.	3000	2000	3750	1250	40	25	1250	1000	
spectro::lyser™ UV-Vis (TSS, NO <sub>3</sub> -N, COD, CODf, UV254, UV254f)	min.	0	0	0	0	0	0	0	0	SP-1-002-p0-s-EX-010 / -075 (incl. Global Calibration i1)
	max.	3000	0	3750	1250	40	25	1250	1000	
spectro::lyser™ UV-Vis (TSS, NO <sub>3</sub> -N, COD, HS-, UV254, UV254f)	min.	0	0	0	0	0	0	0	0	SP-1-002-p0-s-EX-010 / -075 (incl. Global Calibration i5)
	max.	3000	0	3750	1250	40	25	1250	1000	

# spectro::lyser™ titanium pro

spectro::lyser™ titanium pro monitors depending on the application an individual selection of: TSS, turbidity, NO<sub>3</sub>-N, COD, BOD, TOC, DOC, UV254, NO<sub>2</sub>-N, color, BTX, O<sub>3</sub>, HS-, fingerprints, spectral alarms and temperature

- s::can plug & measure
- measuring principle: UV-Vis spectrometry over the total range (190-750 nm)
- ideal for industrial waste water, desalination and sea water
- rugged design with titanium grade 2 housing
- factory precalibrated, with advanced calibration service included
- long term stable and maintenance free in operation
- automatic cleaning with compressed air or brush
- mounting and measurement directly in the media (InSitu) or in a flow cell (monitoring station)
- multiparameter probe with adjustable open path length
- adaption of optical path lengths to 35 mm, 5 mm, 2 mm or 0.5 mm possible
- easy mounting without clogging




up to 10 bar  
operating pressure



up to 50 °C  
operating temperature



highly resistant  
titanium grade 2

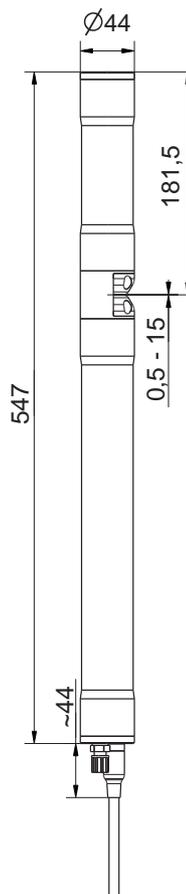

### recommended accessories

part number	article name
D-330-xxx	con::cube V3
B-32-xxx	s::can compressor
B-44	cleaning valve
B-44-2	
F-120-V3	carrier s::can spectrometer V3 & V2 probe, vertical attachment
F-48-V3	spectrometer V3 & V2 flow-cell (bypass setup), PVC
S-11-xx-moni	moni::tool Software
C-32-MIL	Adapter cable to connect a V2 spectrometer (MIL) to V3 Terminal (M12)

### technical specification

measuring principle	UV-Vis spectrometry 190 - 750 nm UV spectrometry 190 - 390 nm	cable length	7.5 m fixed cable (-075) or 1 m fixed cable (-010)
measuring principle detail	xenon flash lamp, 256 photo diodes	cable type	PU jacket
automatic compensation instrument	two beam measurement, complete spectrum	housing material	titanium grade 2 (3.7035)
automatic compensation cross sensitivities	turbidity / solids / organic substances	window material	optical path length 5 ... 0.5 mm: sapphire optical path length 35 mm: fused silica (UV-grade)
precalibrated ex-works	all parameters	weight (min.)	2.8 kg (incl. cable)
accuracy standard solution (>1 mg/l)	NO <sub>3</sub> -N: +/- 2% +1/OPL[mg/l]* COD-KHP: +/-2% +10/OPL[mg/l]* (* OPL ... optical pathlength in mm)	dimensions (Ø x l)	44 mm x 547 mm / 591 mm
access to raw signals	access to spectral information	operating temperature	0 ... 50 °C
reference standard	distilled water	operating pressure	0 ... 10 bar
onboard memory	656 KB	installation / mounting	submersed or in a flow cell
integrated temperature sensor	-10 ... 50 °C	flow velocity	3 m/s (max.)
resolution temperature sensor	0.1 °C	mechanical stability	30 Nm
integration via	con::lyte con::nect	ingress protection class	IP68
power supply	11 ... 15 VDC	automatic cleaning	media: compressed air or autobrush
power consumption (typical)	4.2 W	storage temperature	-10 ... 50 °C
power consumption (max.)	20 W	conformity - EMC	EN 61326-1, EN 61326-2-3
interface to s::can terminals	MIL connector, RS485	conformity - safety	EN 61010-1
interface to third party terminals	con::nect incl. gateway modbusRTU	standard guarantee	1 years
		extended guarantee (optional)	3 years

### paper mill WWTP effluent

		parameter						part number
		TSS [mg/l]	COD [mg/l]	COD f [mg/l]	NO <sub>3</sub> -N [mg/l]	UV254 [Abs/m]	UV254 f [Abs/m]	
spectro::lyser™ UV-Vis (TSS, NO <sub>3</sub> -N, COD, CODf, UV254, UV254f)	min.	0	0	0	0	0	0	SP-1-002-p0-s-TI-010 / -075 (incl. Global Calibration q1)
	max.	1000	350	350	10	1250	1000	

### brewery WWTP influent

		parameter				part number
		TSS [mg/l]	COD [mg/l]	UV254 [Abs/m]	UV254 f [Abs/m]	
spectro::lyser™ UV-Vis (TSS, COD, UV254, UV254f)	min.	0	0	0	0	SP-1-002-p0-s-TI-010 / -075 (incl. Global Calibration b1)
	max.	5000	45000	1250	1000	

### dairy WWTP influent

		parameter						part number
		TSS [mg/l]	COD [mg/l]	COD f [mg/l]	NO <sub>3</sub> -N [mg/l]	UV254 [Abs/m]	UV254 f [Abs/m]	
spectro::lyser™ UV-Vis (TSS, NO <sub>3</sub> -N, COD, CODf, UV254, UV254f)	min.	0	0	0	0	0	0	SP-1-500-p0-s-TI-010 / -075 (incl. Global Calibration m1)
	max.	6000	12500	6000	80	2500	2000	



- Spectrometer Probes
- i:scan**
- Ionselective Probes
- Physical Probes
- Terminals
- Software
- System Configuration
- Monitoring Stations
- Spare Parts & Accessories
- Services & Solutions

i::scan




# i::scan

i::scan monitors depending on the application an individual selection of: TSS, COD, COD f, UV254, UV254 f, color, UVT10, UVT10 f and temperature

- s::can plug & measure
- new light emitting technology
- no consumables, no moving parts
- special, non-fouling optical window material
- low power consumption (less than 1 W typical)
- dual-beam compensated optics
- optional automatic cleaning compressed air (InSitu, only for version -075 with fixed cable) or autobrush
- long term stable, 100 % corrosion free
- plug connection or fixed cable
- 5000 hours maintenance free operation
- mounting and measurement directly in the media (InSitu) or in a flow cell (monitoring station)
- can be mounted directly in a mains pipe / pressure pipe
- operation via s::can terminals & s::can software

### recommended accessories

part number	article name
D-330-xxx	con::cube V3
D-320-xxx	con::lyte
B-32-xxx	s::can compressor
F-110-iscan	carrier i::scan, for easy horizontal attachment
F-120-iscan	carrier i::scan, for easy vertical attachment
F-48-iscan	flow cell for i::scan (waste water), PVC
F-48-process	process connection 1", PVC
S-11-xx-moni	moni::tool Software

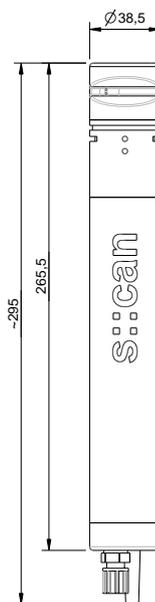

### technical specification

measuring principle	spectrometry	interface to s::can terminals	RS485, MODBUS
resolution	COD: 0.035 mg/l color: 0.07 Hazen UV254: 0.105 Abs/m	cable length	7.5 m fixed cable (-075)
accuracy (standard solution)	COD: 5 mg/l or +/- 2.5 %* color: 7 Hazen or +/- 2.5 %* UV254: 1 Abs/m or +/- 2.5 %* (*whichever is greater)	housing material	PEEK, POM-C
precalibrated ex-works	all parameters	weight (min.)	approx. 330 g
reference standard	distilled water	dimensions (Ø x l)	38.5 x 295 mm
onboard memory	512 MB	operating temperature	0 ... 45 °C
integrated temperature sensor	-20 ... 70 °C	operating pressure	0 ... 8 bar
resolution temperature sensor	0.06 °C	installation / mounting	submersed
integration via	con::lyte con::nect	flow velocity	3 m/s (max.)
power supply	10 ... 18 VDC	automatic cleaning	with autobrush or compressed air (only possible for version (-075) with fixed cable) permissible pressure: 3 ... 6 bar
power consumption (typical)	20 mA @ 12V	storage temperature	-20 ... 60 °C
power consumption (max.)	200 mA @ 12V	conformity - EMC	EN 61326-1 EN 61326-2-3
		protection class (-075)	IP68

### WWTP effluent

		parameter								
		TSS [mg/l]	color (app) [Hazen]	color (tru) [Hazen]	COD [mg/l]	COD f [mg/l]	UV254 [Abs/m]	UV254 f [Abs/m]	UVT10 [%]	part number
i::scan_TSS+COD_	min.	0	0	0	0	0	0	0		Y12-3-e-075
eq+Color+UV254	max.	500	3500	3500	500	300	500	500		
i::scan_TSS+COD_	min.	0			0	0	0	0		Y11-3-e-075
eq+UV254	max.	500			500	300	500	500		
i::scan_TSS+Color	min.	0	0	0						Y08-1-e-075
	max.	500	3500	3500						
i::scan_TSS+UV254	min.	0					0	0	0	Y09-2-e-075
	max.	500					500	500	100	
i::scan_	min.	0	0	0			0	0	0	Y10-2-e-075
TSS+UV254+Color	max.	500	3500	3500			500	500	100	

### WWTP influent

		parameter								
		TSS [mg/l]	color (app) [Hazen]	color (tru) [Hazen]	COD [mg/l]	COD f [mg/l]	UV254 [Abs/m]	UV254 f [Abs/m]	part number	
i::scan_TSS+COD_	min.	0	0	0	0	0	0	0	Y12-3-i-075	
eq+Color+UV254	max.	1000	3500	3500	1500	500	500	500		
i::scan_TSS+COD_	min.	0			0	0	0	0	Y11-3-i-075	
eq+UV254	max.	1000			1500	500	500	500		
i::scan_TSS+Color	min.	0	0	0					Y08-1-i-075	
	max.	1000	3500	3500						
i::scan_TSS+UV254	min.	0					0	0	Y09-2-i-075	
	max.	1000					500	500		
i::scan_	min.	0	0	0			0	0	Y10-2-i-075	
TSS+UV254+Color	max.	1000	3500	3500			500	500		



- Spectrometer Probes
- !::scan
- Ionselective Probes**
- Physical Probes
- Terminals
- Software
- System Configuration
- Monitoring Stations
- Spare Parts & Accessories
- Services & Solutions

# Ionselective Probes



ammo::lyser in waste water effluent



ammo::lyser mounted on railing

# ISE-Probes



fig.1: ammo::lyser™ - electrodes

## “Why do we measure”

Already in the sewer system substances containing organic nitrogen, introduced by normal households as well as industry, are partly converted into ammonium. When applied in the influent of waste water treatment plants, the ion selective multi-parameter probe ammo::lyser™ continuously monitors the ammonium concentration entering the plant. Using this input, the waste water treatment plant is able to adjust its process operations according to the changing contaminant loads. As strongly acidic or alkaline conditions reduce the efficiency of the microbial processes in the waste water treatment the simultaneously performed pH measurement is valuable as well.

When used at strategic points in the sewer system, the ammo::lyser™ can assist in localisation of ammonium sources. As such it can be used for the calculation of freight based treatment costs as well as for continuous monitoring of industrial dischargers. As soon as the true concentration of ammonium to be removed from the waste water is known, it is possible to optimise the design of reservoirs and treatment plants accordingly (most often the planned infrastructure can be reduced in size).

During the biological nitrogen removal ammonium is converted into nitrite and nitrate by activated sludge. This nitrification can be controlled online using the ammonium concentration directly as process control input to maximise ammonium conversion and to minimise the amount of oxygen used for aeration at the same time. The pH value simultaneously provided by the ammo::lyser™ is important as well as the microorganisms of the activated sludge perform best at pH close to 7. As an addition to the obligatory oxygen measurement the ammo::lyser™ makes the nitrification process transparent and helps prevent possible plant breakdowns by recognising them in their earliest stage.

In addition, the ammo::lyser can be equipped with a ISE-nitrate electrode in order to be able to monitor the most common nitrogen parameters NO<sub>3</sub>-N and NH<sub>4</sub>-N simultaneously. Waste water treatment plants and also environmental agencies have already been using ammo::lysers for years now.

The ammo::lyser™ can even be used in the final effluent of nitrifying waste water treatment plants to monitor low concentrations of ammonium discharged into the recipient waters reliably.

- Spektrometer-sonden
- i::scan
- Ionenselektive Sonden**
- Physikalische Sonden
- Bedienegeräte
- Software
- Systemkonfigurationsrationen
- Messstationen
- Ersatzteile & Zubehör
- Services & Solutions

# ISE-Probes

## “How do we measure”

All s::can ISE probes are ion selective multiparameter probes that can measure multiple water quality parameters continuously (On-Line) and directly in the water without the need for complex and maintenance intensive sample pre-treatment.

As all s::can ISE probes can be operated according to the “plug and measure” principle. With a simple plug connection, which provides power supply and data communication. The s::can sensors are connected to an s::can terminal and are ready for use. All s::can ISE probes are pre-calibrated ex works. The “plug & measure” principle avoids complex installation procedures on site and thus does not only save time during initial operation, but also reduces avoidable errors to a minimum.

The highly optimised design completely eliminates all moving parts in contact with the water. This reduces failures, spare part costs and maintenance dramatically.

Using standardised mounting devices, s::can ISE probes can be installed quickly and effortlessly, either submersed (InSitu) or in a flow through setup (Bypass, monitoring station).

s::can ISE probes utilise an automatic cleaning system that uses compressed air for removal of fouling. This system has proven highly efficient and reliable, even in untreated wastewater. Because of this, regular manual cleaning is not required, thus significantly reducing maintenance for the operator.

Like all other s::can instruments, s::can ISE probes are intelligent instruments and recognise and communicate all measurement related and technical issues as soon as they occur.

Although typically not or not often required, it is possible to adjust the calibration of the ammo::lyser™ to the actual matrix in which it is operated, in case deviations between online readings and reference analyses should be observed. Even the validation of the accuracy of the local calibration can be performed without taking the instrument out of the water.

The robust ion selective membrane has a typical lifetime of 6 months in applications with low NH<sub>4</sub>-N concentrations, e.g. in river water. In applications with higher ammonium loads, as in waste water influent, the typical lifetime of the membrane increases to as much as 1 to 2 years.

In order to compensate possible interferences online and automatically the ammo::lyser™ can measure potassium, pH and temperature all together with ammonium. In some applications substantial changes in these parameters can be observed, which interfere with the ammonium measurement. Thus online measurements are used to eliminate this influence and allow an ammonium measurement with the highest possible accuracy. The results of these additional sensors (see figure 1: ammo::lyser™ electrodes) can be displayed as well. When applying the ammo::lyser™ in waters of stable compositions or high concentrations of ammonium, the need to perform such compensations is much reduced. Under such circumstances the unique selectivity of the ammonium membrane is sufficient to achieve reliable measurement results.

Using the combination of innovative algorithms that model the Nernst equation and extensive compensation of possible interferences makes it possible to apply the ammo::lyser™ also in low concentration ranges (below 0.5 mg/L), throughout applications where ion selective sensors of other manufacturers do not function satisfactory.

The durable membranes of the ammo::lyser™ can be exchanged individually when necessary - without the need to replace expensive electrodes or even complete cartridges. The unique non-porous, solid-state reference electrode ensures long lifetime - in this way the regular costs for spare parts are reduced to a minimum.

Its unrivalled measurement features in combination with the lowest possible total costs - initial cost and foreseeable operational costs - make the s::can ISE probe the most attractive solution available today.

# ammo::lyser™ pro

ammo::lyser™ III pro monitors NH<sub>4</sub>-N and temperature  
 ammo::lyser™ IV pro+pH monitors NH<sub>4</sub>-N, temperature and pH  
 ammo::lyser™ IV pro+NO<sub>3</sub>-N monitors NH<sub>4</sub>-N, temperature and NO<sub>3</sub>-N

- s::can plug & measure
- measuring principle: ISE (ionselective electrodes) - with potassium compensation
- multiparameter probe
- long term stable, factory precalibrated
- automatic cleaning with compressed air
- easy & quick mounting and measurement directly in the media (InSitu) or in a flow cell (monitoring station)
- ISE refurbishment - the easy way to minimise maintenance
- unique, non-porous / non-leaking reference electrode for technically unrivalled and consistent performance
- operation via s::can terminals & s::can software
- automatic temperature and potassium compensation, pH compensation possible
- ideal for surface water, ground water, drinking water and waste water
- minimal maintenance
- life time of ISE: typically 6 month (for applications <1mg/l NH<sub>4</sub>-N), resp. 1 to 2 years (for applications >1mg/l NH<sub>4</sub>-N)
- plug connection or fixed cable
- automatic compensation against cross-sensitivities (potassium & pH, optional)

### recommended accessories

part number	article name
F-11-oxi-ammo	carrier oxi::lyser / soli::lyser / s::can ISE probes
C-210-sensor	10 m extension cable for s::can physical probes and s::can ISE probes
B-44	cleaning valve
B-44-2	
F-48-ammo	ammo::lyser flow-cell (by-pass setup), PVC
D-330-xxx	con::cube V3
D-320-xxx	con::lyte



### technical specification

measuring principle	ISE	cable length	7.5 m fixed cable (-075) or plug connection (-000)
measuring principle detail	NH4-N: ionophore membrane K: ionophore membrane pH: non-porous reference electrode NO3-N: ionophore membrane	cable type	PU jacket
resolution	NH4-N, K, NO3-N, Cl, F: 0.01 at 0.02 ... 19.99 mg/l 0.1 at 20.0 ... 99.9 mg/l 1 at 100 ... 1000 mg/l T: 0.1 °C	housing material	stainless steel 1.4571, POM-C
accuracy (standard solution)	NH4-N: +/-3% or +/-0.1mg/l* (*whichever is greater)	weight (min.)	2.7 kg
automatic compensation cross sensitivities	E-532-pro-xxx: temp, K E-532-pro-pH-xxx: temp, pH, K E-532-pro-NO3-N-xxx: temp, K	dimensions (Ø x l)	60 x 326 mm
precalibrated ex-works	all parameters	operating temperature	0 ... 60 °C
response time (T90)	0 ... 120 sec.	operating pressure	0 ... 1 bar
integration via	con::nect con::lyte	installation / mounting	submersed or in a flow cell
power supply	10 ... 30 VDC	process connection	bayonet
power consumption (typical)	0.72 W	flow velocity	0.01 m/s (min.) 3 m/s (max.)
interface to s::can terminals	sys plug (IP67), RS485	automatic cleaning	media: compressed air permissible pressure: 2 ... 4 bar
		storage temperature (electrode)	2 ... 40 °C
		storage temperature (sensor)	2 ... 40 °C
		conformity - EMC	EN 50081-1 EN 50082-1 EN 60555-2 EN 60555-3
		conformity - safety	EN 61010-1
		protection class (-000)	IP67
		protection class (-075)	IP68

### measuring range

		parameter					part number
		NH <sub>4</sub> -N [mg/l]	NO <sub>3</sub> -N [mg/l]	K [mg/l]	pH [pH]	temperature [°C]	
ammo::lyser™ III pro (NH <sub>4</sub> -N, K, temp)	min.	0.1		1		0	E-532-pro-000 / -075
	max.	1000		1000		60	
ammo::lyser™ IV pro+NO <sub>3</sub> -N (NH <sub>4</sub> -N, NO <sub>3</sub> -N, K, temp)	min.	0.1	0.3	1		0	E-532-pro+NO <sub>3</sub> -N-000 / -075
	max.	1000	1000	1000		60	
ammo::lyser™ IV pro+pH (NH <sub>4</sub> -N, pH, K, temp)	min.	0.1		1	2	0	E-532-pro+pH-000 / -075
	max.	1000		1000	12	60	

# ammo::lyser™ eco

- ammo::lyser™ II eco: monitors  $\text{NH}_4\text{-N}$  and temperature
- ammo::lyser™ III eco+pH additionally monitors pH
- ammo::lyser™ III eco+ $\text{NO}_3\text{-N}$  additionally monitors  $\text{NO}_3\text{-N}$
- ammo::lyser™ III eco+Cl- additionally monitors chloride
- ammo::lyser™ IV eco+pH+ $\text{NO}_3\text{-N}$  additionally monitors pH and  $\text{NO}_3\text{-N}$
- ammo::lyser™ VI eco+pH+Cl- additionally monitors pH and chloride

- s::can plug & measure
- measuring principle: ISE (ionselective electrodes) - without potassium compensation
- multiparameter probe
- long term stable, factory precalibrated
- minimal maintenance, automatic cleaning with compressed air
- unique, non-porous / non-leaking reference electrode for technically unrivalled and consistent performance
- ISE refurbishment - the easy way to minimise maintenance
- easy & quick mounting and measurement directly in the media (InSitu) or in a flow cell (monitoring station)
- automatic temperature compensation and pH compensation possible
- ideal for surface water, ground water, drinking water and waste water
- life time of ISE: typically 6 month (for applications  $<1\text{mg/l NH}_4\text{-N}$ ), resp. 1 to 2 years (for applications  $>1\text{mg/l NH}_4\text{-N}$ )
- plug connection or fixed cable

### recommended accessories

part number	article name
B-44	cleaning valve
B-44-2	
C-210-sensor	10 m extension cable for s::can physical probes and s::can ISE probes
F-11-oxi-ammo	carrier oxi::lyser / soli::lyser / s::can ISE probes
F-48-ammo	ammo::lyser flow-cell (by-pass setup), PVC
D-330-xxx	con::cube V3
D-320-xxx	con::lyte



technical specification			
measuring principle	ISE	power consumption (typical)	0.72 W
measuring principle detail	NH4-N: ionophore membrane pH: non-porous reference electrode NO3-N: ionophore membrane Cl-: ionophore membrane	interface to s:can terminals	sys plug (IP67), RS485
resolution	NH4-N, K, NO3-N, Cl, F: 0.01 at 0.02 ... 19.99 mg/l 0.1 at 20.0 ... 99.9 mg/l 1 at 100 ... 1000 mg/l T: 0.1 °C	cable length	7.5 m fixed cable (-075) or plug connection (-000)
accuracy (standard solution)	NH4-N: +/-3% or +/-0.5mg/l* (*whichever is greater)	cable type	PU jacket
automatic compensation cross sensitivities	E-532-eco-xxx: temp E-532-eco-pH-xxx: temp, pH E-532-eco-NO <sub>3</sub> -N-xxx: temp E-532-eco-NO <sub>3</sub> -N-pH-xxx: temp, pH E-532-eco-CL-xxx: temp E-532-eco-CL-pH-xxx: temp, pH	housing material	stainless steel 1.4571, POM-C
precalibrated ex-works	all parameters	weight (min.)	2.7 kg
response time (T90)	0 ... 60 sec.	dimensions (Ø x l)	60 x 326 mm
integration via	con::lyte con::nect	operating temperature	0 ... 60 °C
power supply	10 ... 30 VDC	operating pressure	0 ... 1 bar
		installation / mounting	submersed or in a flow cell
		process connection	bayonet
		flow velocity	0.01 m/s (min.), 3 m/s (max.)
		automatic cleaning	media: compressed air permissible pressure: 2 ... 4 bar
		storage temperature (electrode)	2 ... 40 °C
		storage temperature (sensor)	2 ... 40 °C
		conformity - EMC	EN 50081-1, EN 50082-1, EN 60555-2, EN 60555-3
		conformity - safety	EN 61010-1
		protection class (-000)	IP67
		protection class (-075)	IP68

measuring range						
		parameter				part number
		NH <sub>4</sub> -N [mg/l]	NO <sub>3</sub> -N [mg/l]	pH [pH]	temperature [°C]	
ammo::lyser™ II eco (NH <sub>4</sub> -N, temp)	min.	0.1			0	E-532-eco-000 / -075
	max.	1000			60	
ammo::lyser™ III eco+NO <sub>3</sub> -N (NH <sub>4</sub> -N, temp, NO <sub>3</sub> -N)	min.	0.1	0.3		0	E-532-eco-NO <sub>3</sub> -N-000 / -075
	max.	1000	1000		60	
ammo_lyser_III_eco_pH (NH <sub>4</sub> -N, Temp, pH)	min.	0.1		2	0	E-532-eco-pH-000 / -075
	max.	1000		12	60	
ammo::lyser™ IV eco+NO <sub>3</sub> -N+pH (NH <sub>4</sub> -N, temp, NO <sub>3</sub> -N, pH)	min.	0.1	0.3	2	0	E-532-eco-NO <sub>3</sub> -N-pH-000 / -075
	max.	1000	1000	12	60	

Spectrometer  
Probes

::scan

lonselective  
Probes

Physical Probes

Terminals

Software

System  
ConfigurationMonitoring  
StationsSpare Parts &  
AccessoriesServices &  
Solutions

- Spectrometer Probes
- !::scan
- Ionselective Probes
- Physical Probes**
- Terminals
- Software
- System Configuration
- Monitoring Stations
- Spare Parts & Accessories
- Services & Solutions

# Physical Probes



oxi::lyser in aeration tank



soli::lyser WWTP effluent

# Physical Probes

## “Why do we measure”

### oxi::lyser™

The main application of the oxi::lyser is the online control of the most cost intensive waste water treatment process, namely the aeration of the biological carbon and nitrogen removal. The activated sludge increases its activity with rising oxygen concentrations, but this increase is not linear: Above approximately 2.5 mg/L a further elevation in oxygen does not increase the nitrification enough to justify the rise in costs of aeration. Furthermore, too high oxygen concentrations interfere with the process of denitrification. Therefore the oxygen concentration should be controlled online in the entire biological nitrogen removal process. Using the nitro::lyser™ and the ammo::lyser™ to monitor the nitrogen continuously in combination with the oxygen the operational procedures as well as the economics of waste water treatment can be optimized.

### condu::lyser

Changing salt concentrations can be detected using the sum parameter conductivity. Applied in sewer systems or in the influent of a waste water treatment plant the condu::lyser can track the significant changes in the composition of the waste water entering the plant. In this way the condu::lyser helps to prevent process breakdowns, as it can detect possible conditions toxic to the microorganisms.

### pH::lyser

The pH::lyser is used in sewer systems to ensure that water discharged is within the regulated limits and in the waste water treatment plant to detect pH levels that endanger the plant or its processes as soon as possible. Not only the corrosive properties of acids and bases, but also their harmful or even toxic influence on the activated sludge, require that pH is monitored continuously. In many industries there is a need to neutralise the waste water before it can be treated or discharged. Such neutralisation processes are usually controlled using online pH measurements.

### redo::lyser

Measuring the oxidation-reduction potential continuously for control of biological nitrogen removal is being increasingly replaced by monitoring nitrate or ammonium online. However, especially the inflection points in the ORP registered by the redo::lyser are well known and often irreplaceable parameters for the process control of the biological waste water treatment.

### soli::lyser

The level of solids in aeration basins is an essential parameter for the process control of waste water treatment plants. The concentration of suspended solids measured by the soli::lyser can be used for the optimisation of the biological treatment processes (i.e. nitrification, denitrification as well as phosphorus elimination) and for the control of sludge recirculation.



fig.1: oxi::lyser™



fig.2: condu::lyser



fig.3: pH::lyser

# Physical Probes

## “How do we measure”

Just as all other s::can instruments the s::can physical probes can be operated according to the “plug & measure” principle. With a simple plug connection, which provides power supply and data communication, the s::can probes are connected to an s::can terminal and are ready for use. All s::can probes are pre-calibrated ex works and do not require any conditioning before they can be used - all can be used continuously (OnLine) and directly in the water (InSitu). The “plug & measure” principle avoids complex installation procedures on site and thus does not only save time during initial operation, but also reduces avoidable errors.

The highly optimised design completely eliminates all moving parts in contact with the water. This reduces failures and maintenance dramatically.

Using standardised mounting devices s::can physical probes can be installed quickly and effortlessly, either submersed (InSitu) or in a flow through setup (by-pass, monitoring station).

Like all other s::can instruments s::can physical probes are intelligent instruments - amongst others local calibrations are stored on the probes and auto-diagnosis procedures are used to ensure best possible operation.

### **oxi::lyser™** (see fig.1)

is an optical multi-parameter probe that measures the concentration of dissolved oxygen and the temperature directly in the water. The oxi::lyser™ does not need a minimum flow to produce accurate readings and uses the temperature measurement for On-Line correction. The sensing element, which uses the principle of fluorescence for the oxygen measurement, is neither affected nor damaged by direct exposure to sunlight. Under normal conditions, fouling of the sensing element will not affect the results. However, to be sure that fouling is kept to a minimum, the oxi::lyser™ can be cleaned automatically with compressed air. The oxi::lyser uses no replaceable parts or consumables. Therefore, when operated properly there will be no costs for spare parts at all. For the oxi::lyser™ we guarantee replacement of spare parts free of charge for the first three years after delivery (upon presenting the guarantee card).

### **condu::lyser** (see fig.2)

is a probe that measures conductivity and temperature directly in the water. The condu::lyser does not require a minimum flow to produce accurate readings and uses the temperature to correct the conductivity measurement online. The 4-electrode measurement of the electrical conductivity produces results that are practically independent of possible fouling. The condu::lyser uses no replaceable parts or consumables. Therefore, when operated properly there will be no costs for spare parts at all.

### **pH::lyser** (see fig.3)

is a multi-parameter probe that measures the pH value and temperature directly in the water. The pH::lyser uses the temperature to correct the result of the pH measurement online. The non-porous, solid-state reference electrode ensures excellent pH readings and a long lifetime of the electrode.

### **redo::lyser**

is a probe that measures the oxidation-reduction potential (also known as redox potential) and temperature directly in the water. The non-porous, solid state reference electrode ensures excellent ORP readings and a long lifetime of the electrode.

### **soli::lyser**

is an optical probe that measures the concentration of suspended solids directly in the water. The soli::lyser™ uses the temperature measurement for OnLine correction. Using the principle of infrared absorbance for measuring suspended solids the readings are not interfered by colours. The soli::lyser™ utilises an automatic cleaning system that uses compressed air for removal of fouling. Because of this, regular manual cleaning of the optical windows is not required, thus significantly reducing maintenance for the operator. The soli::lyser uses no replaceable parts or consumables. Therefore, when operated properly there will be no costs for spare parts at all.

Their unrivalled measurement features in combination with the lowest possible total costs - initial cost and foreseeable operational costs - make s::can sensors the most attractive solution available today

# oxi::lyser™


oxi::lyser™ monitors dissolved oxygen & temperature

- s::can plug & measure
- measuring principle: optical / fluorescence
- multiparameter sensor
- ideal for surface water, ground water, drinking water and waste water
- long term stable and maintenance free in operation
- factory precalibrated
- automatic cleaning with compressed air
- mounting and measurement directly in the media (InSitu) or in a flow cell
- no flow necessary
- operation via s::can terminals & s::can software
- minimal maintenance (no consumables)



### recommended accessories

part number	article name
D-330-xxx	con::cube V3
D-320-xxx	con::lyte
B-44	cleaning valve
B-44-2	
C-210-sensor	10 m extension cable for s::can physical probes and s::can ISE probes
F-11-oxi-ammo	carrier oxi::lyser / soli::lyser / s::can ISE probes
F-48-oxi	oxi::lyser or soli::lyser flow-cell (by-pass setup), PVC

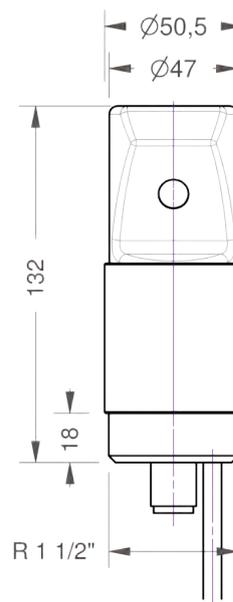

technical specification			
measuring principle	fluorescence	weight (min.)	540 g
resolution	0.01 mg/l O <sub>2</sub>	dimensions (Ø x l)	50.5 mm x 132 mm
accuracy (standard solution)	O <sub>2</sub> : +/- 0.02 mg/l or +/- 1 %* (*whichever is greater)	operating temperature	0 ... 60 °C
response time (T90)	60 ... 0 sec.	operating pressure	0 ... 7 bar
reference standard	saturated sodium sulfite solution	installation / mounting	submersed or in a flow cell
integrated temperature sensor	0 ... 50 °C	process connection	R 1 1/2"
resolution temperature sensor	0.2 °C	pH range	2 ... 10
integration via	con::lyte con::nect	ingress protection class	IP68
power supply	6 ... 16 VDC	automatic cleaning	media: compressed air permissible pressure: 2 ... 4.5 bar
power consumption (max.)	0.32 W	storage temperature	0 ... 60 °C
interface to s::can terminals	sys plug (IP67), RS485	conformity - EMC	EN 50081-2, EN55011
cable length	10 m	conformity - safety	EN 61000-4, EN61010-1
housing material	CPVC, stainless steel, epoxy	standard guarantee	1 years
		extended guarantee (optional)	3 years

measuring range				
		parameter		part number
		O <sub>2</sub> [mg/l]	temperature [°C]	
oxi::lyser (O <sub>2</sub> , temp)	min.	0	0	E-501-075
	max.	25	50	

- Spectrometer Probes
- scan
- Ionselective Probes
- Physical Probes
- Terminals
- Software
- System Configuration
- Monitoring Stations
- Spare Parts & Accessories
- Services & Solutions

# pH::lyser



pH::lyser eco monitors pH & temperature

pH::lyser pro: high temperature range

- s::can plug & measure
- measuring principle: unique, non-porous / non-leaking combined reference electrode for technically unrivalled and consistent pH performance
- multiparameter sensor
- ideal for surface water, ground water, drinking water and waste water
- long term stable and maintenance free in operation
- factory precalibrated
- mounting and measurement directly in the media (InSitu) or in a flow cell
- operation via s::can terminals & s::can software
- optional: automatic cleaning with compressed air
- plug connection or fixed cable

### recommended accessories

part number	article name
D-330-xxx	con::cube V3
D-320-xxx	con::lyte
F-12-sensor	carrier s::can physical probes
F-48-sensor	s::can Sensor flow-cell (by-pass setup), PVC
S-11-xx-moni	moni::tool Software

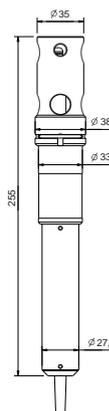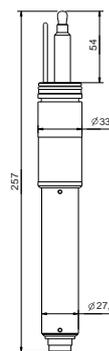

technical specification	
measuring principle	potentiometric
measuring principle detail	combined, non-porous reference electrode
resolution	0.01 pH
accuracy (standard solution)	0.1 pH
automatic compensation instrument	temperature
response time (T90)	30 ... 0 sec.
integrated temperature sensor	0 ... 90 °C
integration via	con::lyte con::nect
power supply	9 ... 18 VDC
power consumption (typical)	0.8 W
power consumption (max.)	1 W
interface to s::can terminals	sys plug (IP67), RS485
cable length	7.5 m fixed cable (-075) or plug connection (-000)
cable type	PU jacket
housing material	stainless steel 1.4404/1.4401, POM-C or stainless steel 1.4404/1.4401, PVC (E-514-4-075)
weight (min.)	400 g
dimensions (Ø x l)	33 x 257 mm
operating pressure	0 ... 10 bar
installation / mounting	submersed or in a flow cell
process connection	quick connect
flow velocity	3 m/s (max.) 0.01 m/s (min.)
automatic cleaning	media: compressed air permissible pressure: 3 ... 6 bar
storage temperature (electrode)	-5 ... 30 °C
storage temperature (sensor)	-10 ... 60 °C
conformity - EMC	EN 61326-1
conformity - safety	EN 61010-1
operating temperature (eco)	0 ... 70 °C
operating temperature (pro)	0 ... 90 °C
protection class (-000)	IP67
protection class (-075)	IP68

measuring range				
		parameter		
		pH [pH]	temperature [°C]	part number
pH::lyser eco (pH, temp)	min.	2	0	E-514-2-000 / -075
	max.	12	70	
pH::lyser pro (pH, temp)	min.	0	0	E-514-3-000 / -075
	max.	14	90	

# redo::lyser



redo::lyser monitors ORP and temperature

redo::lyser pro: high temperature range

- s::can plug & measure
- measuring principle: unique, non-porous / non-leaking combined reference electrode for technically unrivalled and consistend ORP performance
- multiparameter sensor
- ideal for surface water, ground water and drinking water, also waste water
- long term stable and maintenance free in operation
- factory precalibrated
- mounting and measurement directly in the media (InSitu) or in flow cell
- operation via s::can terminals & s::can software
- plug connection or fixed cable

### recommended accessories

part number	article name
D-330-xxx	con::cube V3
D-320-xxx	con::lyte
F-12-sensor	carrier s::can physical probes
F-48-sensor	s::can Sensor flow-cell (by-pass setup), PVC
S-11-xx-moni	moni::tool Software

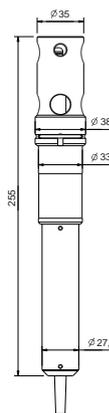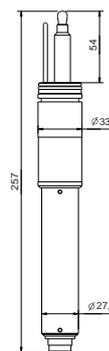

technical specification			
measuring principle	potentiometric	weight (min.)	400 g
measuring principle detail	combined, non-porous reference electrode	dimensions (Ø x l)	33 x 257 mm
resolution	1 mV	operating pressure	0 ... 10 bar
accuracy (standard solution)	+/- 10 mV	installation / mounting	submersed or in a flow cell
response time (T90)	30 ... 0 sec.	process connection	quick connect
integrated temperature sensor	0 ... 90 °C	flow velocity	0.01 m/s (min.) 3 m/s (max.)
integration via	con::lyte con::nect	automatic cleaning	media: compressed air permissible pressure: 3 ... 6 bar
power supply	9 ... 18 VDC	storage temperature (electrode)	-5 ... 30 °C
power consumption (typical)	0.8 W	storage temperature (sensor)	-10 ... 60 °C
power consumption (max.)	1 W	conformity - EMC	EN 61326-1
interface to s::can terminals	sys plug (IP67), RS485	conformity - safety	EN 61010-1
cable length	7.5 m fixed cable (-075) or plug connection (-000)	operating temperature (eco)	0 ... 70 °C
housing material	stainless steel 1.4404/1.4401, POM-C	operating temperature (pro)	0 ... 90 °C
		protection class (-000)	IP67
		protection class (-075)	IP68

measuring range				
		parameter		part number
		redox [mV]	temperature [°C]	
redo::lyser eco (ORP, temp)	min.	-2000	0	E-513-2-000 / -075
	max.	2000	70	
redo::lyser pro (ORP, temp)	min.	-2000	0	E-513-3-000 / -075
	max.	2000	90	

Spectrometer Probes

i::scan

Ionselective Probes

Physical Probes

Terminals

Software

System Configuration

Monitoring Stations

Spare Parts &amp; Accessories


Services &amp; Solutions

# condu::lyser

condu::lyser monitors conductivity, temperature & salinity\*

- s::can plug & measure
- measuring principle condu::lyser: 4-electrode, direct-contact measurement
- multiparameter sensor
- ideal for surface water, ground water, drinking water and waste water
- long term stable and maintenance free in operation
- factory precalibrated
- mounting and measurement directly in the media (InSitu) or in a flow cell
- operation via s::can terminals & s::can software
- plug connection or fixed cable
- parameter conductivity or salinity

recommended accessories	
part number	article name
D-330-xxx	con::cube V3
D-320-xxx	con::lyte
F-12-sensor	carrier s::can physical probes
F-48-sensor	s::can Sensor flow-cell (by-pass setup), PVC
S-11-xx-moni	moni::tool Software

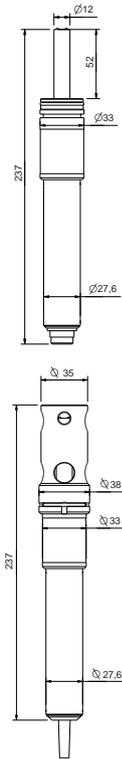

technical specification	
measuring principle	4-electrode, direct-contact
resolution	1 µS/cm or 0.01 mS/cm or 0.1 PSU
accuracy (standard solution)	0.1% of reading
automatic compensation instrument	temperature
integrated temperature sensor	-20 ... 90 °C
integration via	con::lyte con::nect
power supply	7 ... 30 VDC
power consumption (typical)	0.06 W
power consumption (max.)	0.15 W
interface to s::can terminals	sys plug (IP67), RS485
cable length	7.5 m fixed cable (-075) or plug connection (-000)
housing material	Stainless steel 1.4435, FDA-approved PEEK, POM-C
weight (min.)	240 g
dimensions (Ø x l)	33 x 237 mm
operating temperature	0 ... 70 °C
operating pressure	0 ... 20 bar
installation / mounting	submersed or in a flow cell
process connection	quick connect
flow velocity	0.01 m/s (min.) 3 m/s (max.)
automatic cleaning	media: compressed air permissible pressure: 2 ... 6 bar
storage temperature	0 ... 60 °C
conformity - EMC	EN 61326-1
protection class (-000)	IP67
protection class (-075)	IP68

measuring range					
		parameter			part number
		conductivity [µS/cm]	temperature [°C]	salinity* [PSU]	
condu::lyser	min.	0	0	2	E-511-2-000 / -075
	max.	500000	70	42	

\* Salinity measurement ist only possible in combination with con::cube terminal

Spectrometer  
Probes

scan

Ionselective  
Probes

Physical Probes

Terminals

Software

System  
Configuration

Monitoring  
Stations

Spare Parts &  
Accessories

Services &  
Solutions


# soli::lyser

soli::lyser monitors TSS or MLSS

- s::can plug & measure
- measuring principle: optical (infrared absorbance)
- ideal for waste water
- long term stable and maintenance free in operation
- factory precalibrated (2 measuring ranges available)
- automatic cleaning with compressed air
- mounting and measurement directly in the media (InSitu) or in a flow cell
- operation via s::can terminals & s::can software
- minimal maintenance (no waste parts)
- most cost efficient sensor, cost of ownership are unmatched

### recommended accessories

part number	article name
D-330-xxx	con::cube V3
D-320-xxx	con::lyte
F-11-oxi-ammo	carrier oxi::lyser / soli::lyser / s::can ISE probes
F-48-oxi	oxi::lyser or soli::lyser flow-cell (by-pass setup), PVC
C-210-sensor	10 m extension cable for s::can physical probes and s::can ISE probes
B-44	cleaning valve
B-44-2	

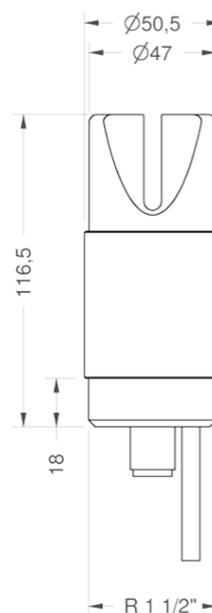

technical specification			
measuring principle	optical	power consumption (max.)	0.32 W
measuring principle detail	infrared (880nm)	interface to s::can terminals	sys plug (IP67), RS485
measuring range application	0.25 ... 30 g/l TSS/MLSS (E-505-1-075) 0 ... 1500 mg/l TSS (E-505-2-075)	cable length	10 m
resolution	10 mg/l between 1000 and 9999 mg/l 100 mg/l above 10 g/l 1 mg/l below 1000mg/l	cable type	22 AWG, polyurethane jacket
accuracy	TSS/MLSS: +/- 100 mg/l or +/- 5 %* (E-505-1-075) TSS: +/- 2 mg/l or +/- 5 %* (E-505-2-075) (*whichever is greater)	housing material	epoxy, stainless steel
repeatability	± 1 %	weight (min.)	540 g
automatic compensation instrument	temperature	dimensions (Ø x l)	51 x 117 mm
response time (T90)	60 ... 0 sec.	operating temperature	0 ... 60 °C
integration via	con::lyte con::nect	operating pressure	0 ... 6.8 bar
power supply	6 ... 16 VDC	installation / mounting	submersed or in a flow cell
		process connection	R 1 1/2"
		ingress protection class	IP68
		automatic cleaning	media: compressed air or autobrush permissible pressure: 2 ... 4.5 bar
		storage temperature (sensor)	0 ... 60 °C
		conformity - EMC	EN 50081-2, EN55011
		conformity - safety	EN 61000-4, EN61010-1
		standard guarantee	1 years
		extended guarantee (optional)	3 years

measuring range			
		parameter	part number
soli::lyser (TSS)	min.	TSS [mg/l]	E-505-2-075
	max.	0	
soli::lyser (TSS)	min.	1500	E-505-1-075
	max.	250	
		30000	

- Spectrometer Probes
- !::scan
- Ionselective Probes
- Physical Probes
- Terminals**
- Software
- System Configuration
- Monitoring Stations
- Spare Parts & Accessories
- Services & Solutions

# Terminals




con::cube V3



con::lyte

# con::cube V3

- s::can high-end IoT (Internet of Things) terminal based on an industrial PC, IP65
- widescreen color graphical display (9") and touch screen
- highly intuitive use, informative visualization & easy operation: time series, optical spectra and all events in clear text
- sensor and station management of up to 64 parameters: automatic cleaning, data logging, sample & calibration including history and multipoint calibration, sensor function check, user management and easy data transfer via USB-stick
- low power operation with less than 3 watts (@ 15 min. measuring interval): wide range AC and DC variants available
- IoT (Internet of Things) and M2M (Machine to Machine) connectivity: 1000 Mb/s Ethernet, 300 Mb/s WLAN and optional worldwide LTE, HSPH+, GSM 4G interface, remote control (https) and data transfer into "Cloud" via (S)FTP, SSH und RSYNC
- process interface to SCADA via Modbus RTU/TCP, SDI-12, Profibus DP, analog 0/4-20 mA and relay outputs (state)
- integration of third-party sensors via analog 0/4-20 mA and digital (solid state) inputs, Modbus RTU/TCP
- easily extendable & all moni::tool features available: 8 slots to customize I/Os, moni::tool software pre-installed, additional software features like online data validation and event detection optional

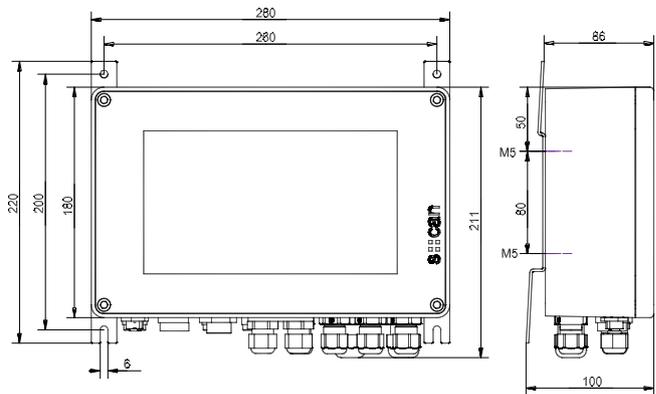

## standard accessories

part number	article name
S-11-04-moni	moni::tool - Basic s::can monitoring station software for 4 parameters
D-303-LX	Linux Application Licence (obligatory to D-330)
D-315-out-relay	4 digital outputs (output module), provides 4 configurable relay contacts 1A
D-315-out-SDI12	SDI 12 (output module), provides SDI 12 for data transfer to PLC systems
D-315-out-mA	2 analogue outputs (output module), provides data transfer to PLC systems
D-315-in-mA	2 analogue inputs (input module), provides 2 analogue inputs (4-20mA) for integration of 3rd party readings
D-315-in-relay	2 digital inputs (input module), provides 2 digital IN (5-24V) for integration of 3rd party readings
D-315-out-profi-bus	provides Profibus DPV0 for data transfer to PLC systems

### technical specification

integration of	1 x s::can spectrometer probe and 4 x s::can sensors or ISE probes	power supply	D-330-230: 100 ... 240 VAC D-330-024: 10 ... 36 VDC
display	color-display 9" TFT	power consumption (typical)	1.5 W (in sleep mode) 10 W (no analogue ports) 30 W (fully equipped)
function indicator	4 x LED	power consumption (max.)	20 W (no analogue ports) 60 W (fully equipped)
operation via	integrated touch-screen (optional) Ethernet - Browser or VNC WiFi - Browser or VNC USB (keyboard, mouse) 4G modem (optional)	grounding	<0.5 Ohm to process media
operating system	Linux	analog outputs	up to 8x2 x 0/4-20 mA
main memory	2 GB RAM	analog inputs	up to 8x2 x 0/4-20 mA
onboard memory	16 GB	outputs for automatic cleaning	2
interface to s::can spectrometric probes	M12 RSTS 8Y (IP67), RS485, Ethernet	digital inputs	up to 8x2 x 14 VDC
interface to s::can sensors	4 x sys plug, RS485	relay outputs	4 x 2A (500 VAC)
interface to third party sensors	Modbus RTU/TCP, analog inputs	system error relay	1 x 2A (500 VAC)
network connection	802.11n a/b/g WiFi 300Mb/s Ethernet LAN 1 Gb/s worldwide 4G (optional)	dimensions (width x height x depth)	280 x 209 x 85 mm
interface to SCADA	Modbus RTU/TCP, Profibus DP (optional), SDI-12 (optional), analog outputs	housing material	aluminium alloy, powder coated
data transfer	via SSH, FTP, SFTP, RSYNC and USB stick	weight (min.)	4 kg
remote control	via http, https	operating temperature	-20 ... 50 °C
		storage temperature	-20 ... 60 °C
		storage humidity	5 ... 90 %
		ingress protection class	IP65
		conformity - EMC	EN 61326-1
		conformity - safety	IEC/EN/UL/CSA 61010-1 IEC/EN/UL/CSA 61010-2-201 IEC/EN 60529
		part number 24V	D-330-024
		part number 230V	D-330-230


### recommended accessories

part number	article name
C-31-eu	Optional 2 m power cable
C-31-us	Optional 2 m power cable
D-330-anten-na-pro	External, high range antenna option for con::cube, incl. 3 m extension cable
D-330-ANTEN-NA-PLUG	Internal antenna adapter cable and connector, option for con::cube
D-330-ANTEN-NA-CABLE	10 m antenna extension cable
S-11-autosampler	moni::tool - auto sampler feature
S-11-basic-PLC	moni::tool - basic PLC functionality (time control, pulsing, custom bits)
S-11-camera	moni::tool - camera input
S-11-data-export	moni::tool - automatic data transfer (via SSH, FTP, TML)
S-11-free-for-mula	moni::tool - configureable mathematic formula
S-11-SMS	moni::tool - SMS notification
S-14-vali	vali::tool - s::can data validation software
S-15-ana	ana::tool - s::can event detection software
F-51	weather shield for s::can terminals
S-20-MVA	Complete license of all moni::tool modules, vali::tool and ana::tool
D-330-4GLX	Worldwide 4G internet connection via 7-band HSPA+ (21 Mbps/5.7 Mbps)

# con::line




- s::can's low power terminal for battery operated, remote water quality monitoring
- 4G data communication to any cloud system through secure SFTP or SCP connections
- direct plug connection to s::can's pipe::scan and s::can probes
- on board storage of measurement data up to one year
- local access to terminal through WLAN interface using lo::Tool
- MODBUS TCP or MODBUS RTU uplink to SCADA systems

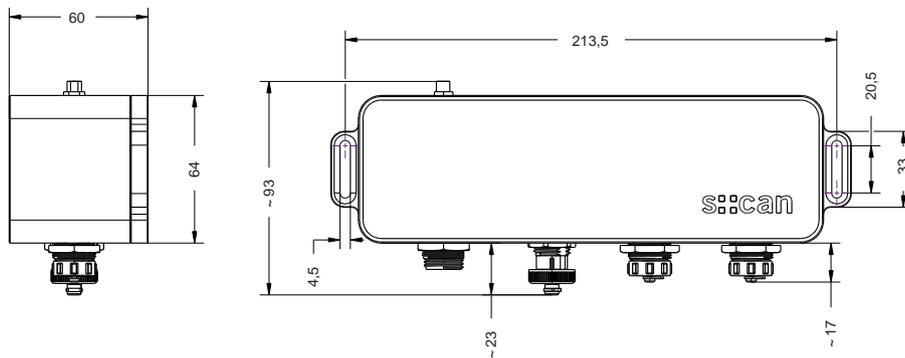

technical specification			
onboard memory	8 GB	power consumption (typical)	1.5 W without sensors
interface to s::can sensors	modbus RTU through 6-pin buccaneer plug (sensors) and 12 pin buccaneer plug (pipe::scan)	power consumption (sleep model)	< 50 mW
interface to third party sensors	2 x multi-purpose inputs: current OR voltage OR pulse counting	power consumption (max.)	18 W with full sensor load
network connection	built-in 4G LTE connection	SIM card format	2FF
local operation	lo::Tool through WLAN	data security	TLS 1.3, SSH encryption, hardware encryption of data
antennas	CELLULAR: 2J2124B-B05H with 3 m cable 4G / WLAN: built-in antenna	remote configuration	config file pull from server
antenna plug	SMA (fm)	supply outputs	1 x 12V 6 pin buccaneer, 4 x 12V 12 pin buccaneer (shared between sensors and cleaning devices), 1 x 5V 12 pin buccaneer individually switchable
frequency bands	GSM, DCS, WCDMA, LTE, GNSS	dimensions (width x height x depth)	22,6 x 6,0 x 6,4 cm
interface to SCADA	modbus RTU and TCP (through M12 plug)	housing material	polyurethane
cleaning device support	ruck::sack, auto::brush, cleaning valve	weight (min.)	approx. 500 g (1.1 lbs)
cloud transfer	CSV file push through SFTP, SCP REST API data pull	operating temperature	-20 ... 60 °C
device updates	local or over the air update	installation / mounting	direct wall mounting, top hat rail mounting with adapters
power supply	external 2-pin buccaneer plug 9-18V DC, <1,5 A	ingress protection class	IP67
		part number	D-500-012
		certified according to	RED, FCC, ISED, PTCRB

recommended accessories	
part number	article name
S-500-08-IO	Io::Tool - s::can monitoring station software for 8 parameters
D-500-DIN-ADAPTER	DIN Rail mounting set (for con::line)
C-500-CLEANING	adapter for autobrush/ruck::sack/B44 claning valve for con::line, IP68
C-500-ETHERNET	network adapter cable 30 cm
C-500-PIPESCAN-CABLE	12 pin Buccaneer to pipe::scan hub, 10 m cable
C-500-POWER-030	power cable (con::line), 2 pin Buccaneer (loose ends), 3 m cable
C-500-UP-LINK-010	M12 modbus/ethernet to SCADA for con::line (loose ends) 1 m cable
C-500-UP-LINK-075	M12 modbus/ethernet to SCADA for con::line (loose ends) 7.5 m cable
C-500-IO-BOX	adapter box 12 pin Buccaneer to terminal clamps, 0.5 m cable IP67, 2 cable glands


## con::line connections

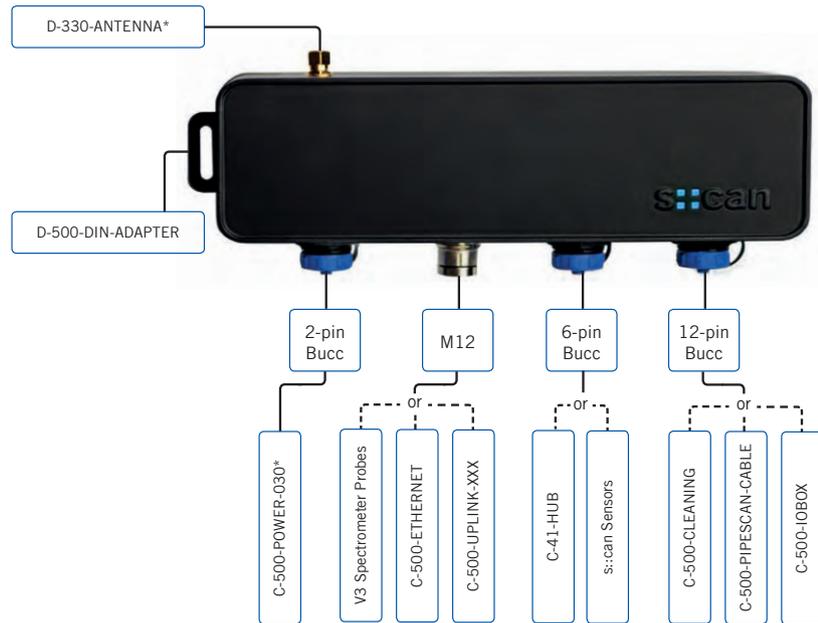

\* Included in the scope of delivery

# con::lyte

- low-cost terminal for control applications
- power efficient LCD display and ergonomic UI
- sensor and station management of up to 2 (eco) or 6 (pro) parameters
- control of automatic cleaning, data logging, sample & calibration, sensor function check and easy data transfer via USB-stick
- process interface to SCADA or con::cube via Modbus RTU, Profibus DP, analog 4-20 mA and relay outputs (state/PWM/Pulse)
- integration of third-party sensors via analog and digital I/Os
- outstanding control features: easy threshold and alarm limits with hysteresis, 3 opt. PID or 2-point controllers
- certifications: CE, UL, CSA and RCM

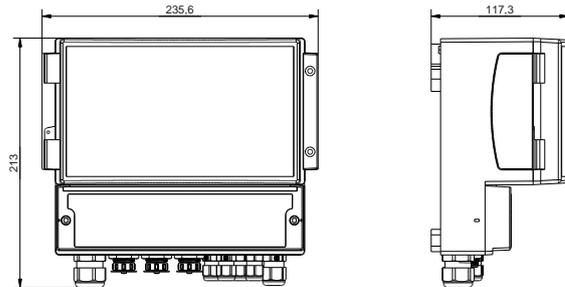

## technical specification

display	LCD
function indicator	2 x LED
operation via	keypad
onboard memory	512 MB
interface to SCADA	Modbus RTU (optional), Profibus DP (optional), analog outputs
data transfer	USB stick
power supply	100-240 VAC (50-60 Hz)
power consumption (max.)	25 W
analog inputs	1 x 0/4-20 mA
outputs for automatic cleaning	1 (2nd cleaning device via relay output)
digital inputs	2
digital input flow detector	1
relay outputs	2 x 6A (600 VAC)
system error relay	1 x 6A (600 VAC)
dimensions (width x height x depth)	235.6 x 213 x 117.3 mm
housing material	PC
weight (min.)	1300 g
operating humidity	5 ... 90 %
storage temperature	-20 ... 50 °C
storage humidity	5 ... 90 %
ingress protection class	IP65
conformity - EMC	EN 61326-1
conformity - safety	EN 61010-1
conformity - RoHS 2	EN 50581

### con::lyte eco (2 parameters)

integration of	1 x i::scan, s::can sensor or s::can ISE probe
interface to s::can sensors	1 x sys plug, RS485
analog outputs	2 x 4-20 mA
operating temperature (eco)	-20 ... 45 °C
part number 230V	D-320-eco-230

### con::lyte pro (6 parameters)


integration of	pro1: i::scan, s::can sensors/ISE probes; pro2: s::can G::series, i::scan, s::can sensors/ISE probes
interface to s::can spectrometric probes	D320-pro2: 1 x MIL, RS485
interface to s::can sensors	D-320-pro1: 3 x sys plug, RS485 D-320-pro2: 2 x sys plug, RS485
analog outputs (optional license)	3 x 4-20 mA
analog outputs (optional module)	2 x 4-20 mA / 4 x 4-20 mA
operating temperature (pro1)	-20 ... 45 °C
operating temperature (pro2)	-20 ... 50 °C
part number 230V	D-320-pro1-230, D-320-pro2-230

### recommended accessories

part number	article name
C-31-eu	Optional 2 m power cable
C-32-V3	Adapter cable to connect a V3 spectrometer (M12) to V2 Terminal (MIL Plug)
D-319-logger	Datalogger option for con::lyte
D-319-out-profibus	Profibus (output module for con::lyte)
D-320-PID	3 x PID control output for con::lyte D-320
D-320-out-mA	License for 3 analog outputs (4-20 mA) for con::lyte pro
D-319-out-mA	2 x 4 - 20 mA (output module for con::lyte)

# con::nect V3

- s::can connection device for one spectrometer V3 probe and one cleaning device
- expand con::cube/con::lyte sensors networks (longer distances and higher number of sensors)
- operation of one s::can spectrometer V3 probe
- RJ45 connector for wired network access

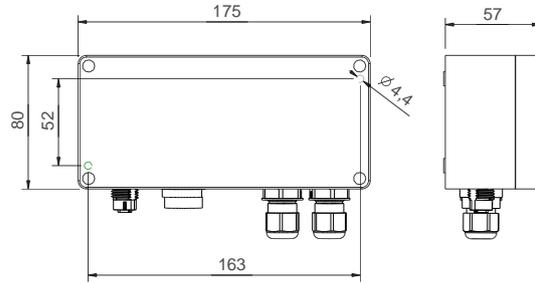

## technical specification

integration of	1 x s::can spectrometer V3 probe with one cleaning device
operation via	via PC / notebook / any third party device
interface to s::can spectrometric probes	M12 RSTS 8Y (IP67), RS485, Ethernet
interface to PC	Ethernet (RJ45)
interface to SCADA	REST API / RS485
data transfer	via PC (visu::tool)
power supply	12 VDC

power consumption (max.)	passive device
outputs for automatic cleaning	1
dimensions (width x height x depth)	80 x 175 x 57 mm (w/o cable bushing)
housing material	AlSi12, powder coated
weight (min.)	600 g
operating temperature	-20 ... 50 °C
storage temperature	-20 ... 50 °C
ingress protection class	IP65
part number	B-33-012

## recommended accessories

part number	article name
S-31-visu (visu::tool lyte)	visu::tool lyte/pro - Data Visualisation and Analysis Tool
S-34-visu (visu::tool pro)	
C-31-eu	Optional 2 m power cable
C-31-us	Optional 2 m power cable

- Spectrometer Probes
- !::scan
- Ionselective Probes
- Physical Probes
- Terminals
- Software**
- System Configuration
- Monitoring Stations
- Spare Parts & Accessories
- Services & Solutions

# Software



- Spectrometer Probes
- s::scan
- Ionselective Probes
- Physical Probes
- Terminals
- Software**
- System Configuration
- Monitoring Stations
- Spare Parts & Accessories
- Services & Solutions

**moni::tool™**  
 vali::tool ana::tool

**A true software revolution that changes the face of water quality monitoring, data validation and event detection!**

## Why use monitoring station software?

The rising popularity of online sensors means that ever increasing amounts of data are collected. Online results increase the understanding of water quality, but the amount of data can be so enormous that it is impossible to manually verify and interpret the data. Automatic validation and event detection is therefore crucial to exploit the potential of online monitoring.


## What is special about moni::tool?

s::can has developed a modular software package to improve data availability and quality. The concept looks at the whole system: hardware, software and operator. Only this all encompassing approach can guarantee that operational control and / or event detection work reliably. Using raw, unvalidated information for control or event detection will result in a high false alarm rate or in poor sensitivity.

## The modular approach:

The s::can software package for water quality monitoring is split into three modules:

- **moni::tool™ - Sensor and Station Management**  
 Provides management of probes and stations. It documents critical manipulations, from user login to maintenance and logbook keeping. It also has intuitive visualization tools to display all information in a clear and easy to understand format.
- **vali::tool - Data Validation**  
 Automatically detects, marks and (optionally) corrects untrustworthy data. It ensures only high quality data are fed into the event detection module. It also provides the user with indications on sensor maintenance requirements, as well as automatic detection of malfunctions.
- **ana::tool - Event Detection**  
 With ana::tool your existing simple water quality monitoring station morphs into a fail-safe EDS-system!

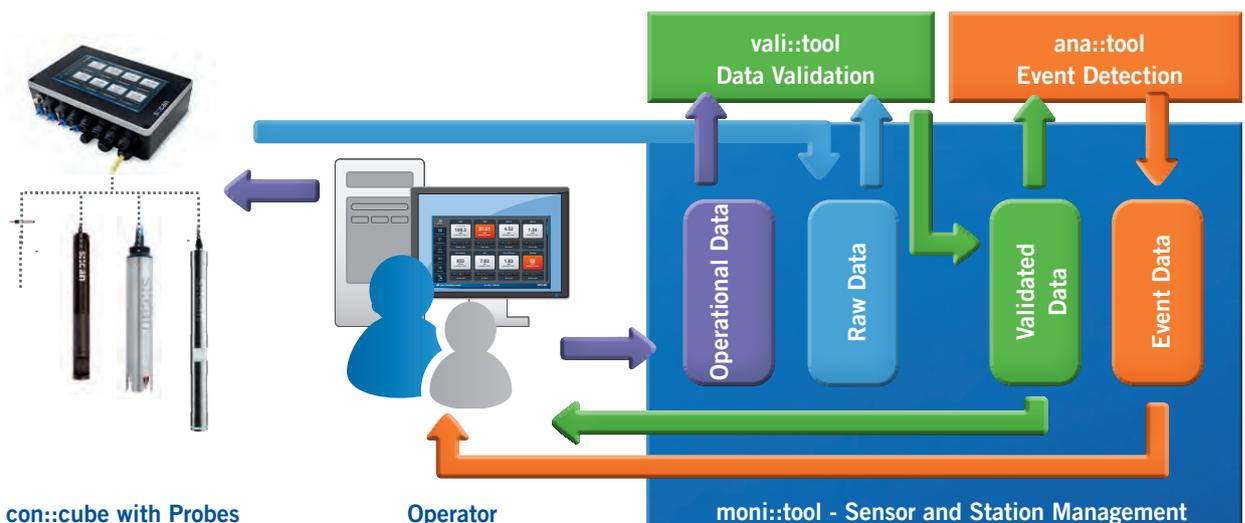


© s::can GmbH

moni::tool™

## Sensor and Station Management

moni::tool™ is a revolutionary new platform for the management of an almost unlimited number of stations, online probes, analyzers and parameters. Intuitive operation - on site or remote - and reams of valuable features make moni::tool™ essential for state of the art sensor and station management.

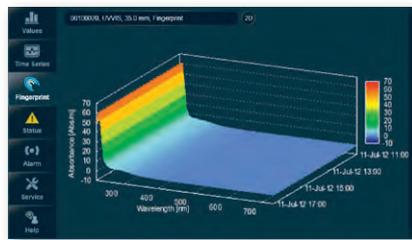

Want to try moni::tool?  
... visit [monitool.s-can.at](http://monitool.s-can.at)

## moni::tool™ - Basic Features



- Management for an almost unlimited number of stations, sensors and parameters
- Automatic installation of all s::can sensors
- Open platform talks to any sensor type (analog 0/4-20 mA, MODBUS RTU/ TCP, solid state)



- Impressive real-time zoomable, scrollable graphical visualization of all historical data including 3D-optical spectra
- Optimal display readability with Classic-, Day- and Night-Mode



- Easy customization of tools, devices and protocols
- Clear text help messages
- Available languages: German, English, Chinese, Japanese, Spanish, France and Turkish



- Smart-phone-style, easy to use touch interface allows intuitive operation by non-expert staff
- Minimal user input necessary, Few input options = few input mistakes
- User management: Basic / Advanced / Expert user level



- Quality controlled and documented status management of probes and stations eliminates the need for paper log books
- Station and probe management for 100% transparent documentation



- Can be used in a small monitoring station as well as in the heart of a large central data collection system
- Large local database for collection and management of all incoming data
- Secure, automatic Data export



- Data Integration into any modern data exchange system
- Probes and stations can be accessed from any suitable device
- Can be run from any standard web browser e.g. via PC, Tablet, Notebook or Smart Phone



- Protected by a user-configurable firewall



- Automatic probe cleaning




- Any parameter input of any type of probe can be fed in - managed and analyzed in real time
- Multi sample function to calibrate all installed probes with minimal effort

# moni::tool™ - Additional Features

## Automatic File Transfer

Automatic transfer of all relevant information from con::cube to your cloud and servers


- Customizable ASCII format (csv supported)
- Import to any spreadsheet application or database (e. g. Excel)
- SSH-Transfer, FTP-Transfer and TML-Interface (XML-Based).

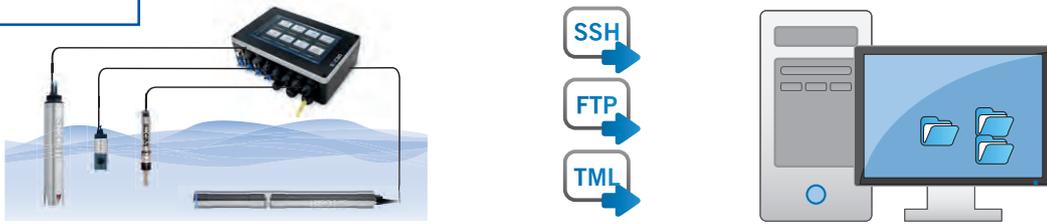

## Free Formula

Offers to use virtual parameters based on online measurement results using a custom “free formula” (FF)


- Converts parameters/units, example: NO3-N can be converted to NO3
- Combines monitored parameters, example: COD and flow can be used to calculate load
- Long list of supported functions, example: multiple parameters including single wavelengths from a spectro::lyser fingerprint can be combined to create a custom Water Quality Index

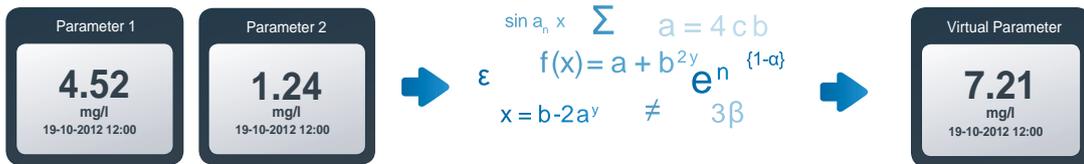

## SMS Notification

Sends a SMS in case a configurable condition occurs (this function uses the optional con::cube internal modem)

- Every digital output function can be used to trigger a SMS notification
- Example conditions: parameter reading over limit, event detected, failure with installation or sensor detected, etc.
- Customizable SMS message text

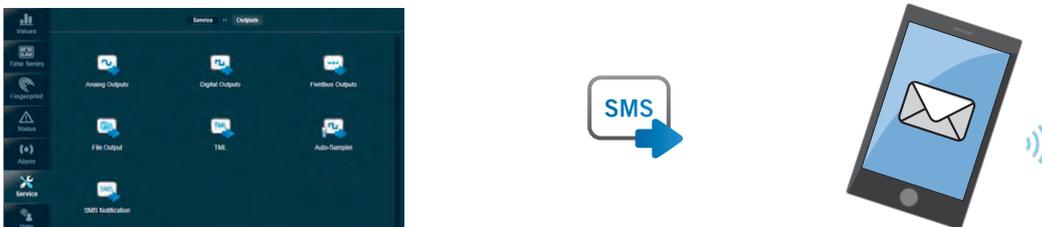


# moni::tool™ - Additional Features

## Auto Sampler

### Create your own Auto-Sampler!


- Complete and flexible sample system
- Configure the conditions for taking samples
- Combine different conditions and program delays
- Control sample capacity either by a fill level detector or by a timer

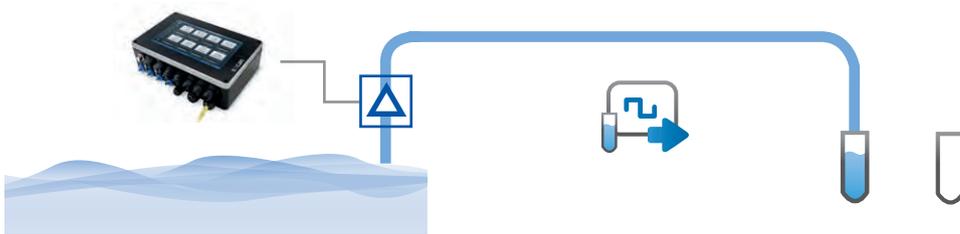

## PLC Tools

### Enhance the process control functionality for the con::cube digital outputs

- Time Control
- Value Hysteresis downwards
- Pulsing

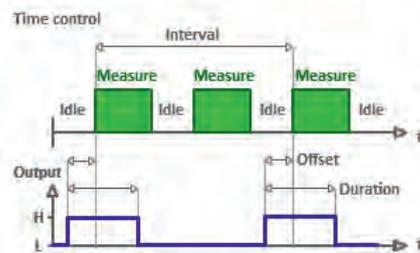

The output is time controlled by the the measurement cycle. Interval defines how often, Offset defines the relative position to the start of measurement and Duration defines how long the output is 'HIGH'.

## Camera Integration

### Automatically collect snapshots and watch live video stream

- Effective surveillance against vandalism
- Choose the interval of snapshots freely
- Review stored snapshots in a gallery
- Can be used with INSTAR and AXIS cameras



vali::tool

## Data Validation


Automatic data validation makes sure that only unmarked, “clean” data are used for further analysis, training and alarms. Any non-event-related deviating data must be identified and marked before feeding them into the following event detection module.

### Why is Data Validation before Event Detection important?

vali::tool automatically detects, marks and (optionally) corrects untrustworthy data, not by using mean average - it detects outliers, noise and checks for discontinuous data. It ensures only high quality data are fed into the event detection module (ana::tool). It also provides the user with indications on sensor maintenance requirements, as well as automatic detection of malfunctions.

### How does vali::tool work?

The basic steps in the data validation are: outlier detection, noise detection and check for discontinuous data. The results of the data validation are presented as status information with the respective parameter and sensor. A station status symbol as well as a change in background color in the parameter display indicate that data quality is sub-optimal. Detailed notifications, including suggestions to remedy the issue or for maintenance, can be called up.

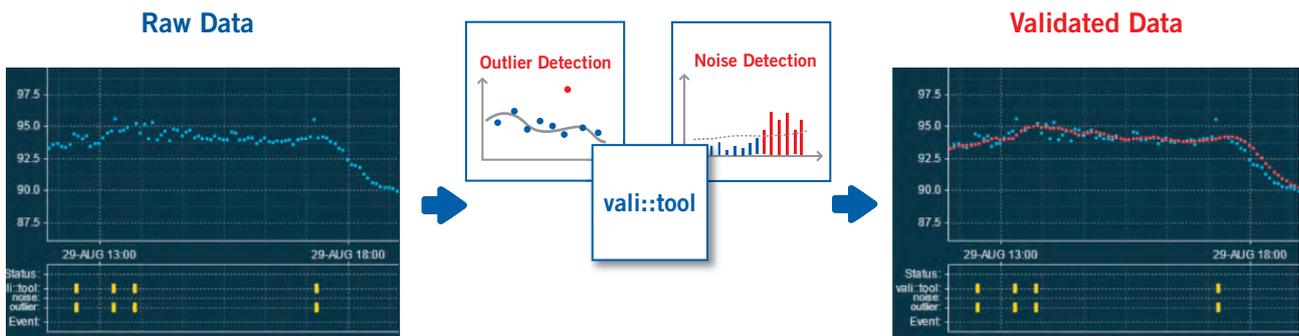

### vali::tool - Highlights

- Provides self-adaptive, self-controlled data validation in real time
- Ensures both sensitive and reliable alarm limits respectively setpoints for process control
- Analyzes noise, outliers and other combinations in real time to reliably detect any malfunction at an early stage
- Considers user interventions in real-time
- Application-specific training period considers normal fluctuations of individual water matrix and typical process dynamics
- Helps to dramatically reduce false alarm rates
- Configurable auto-correction of data based on threshold, outlier and noise analysis

ana::tool

## Event Detection for everyone

- Affordable for everyone
- Best available EDS
- Simple, easy to use and automatic


### ana::tool turns your monitoring station into an Event Detection System!

ana::tool identifies unknown and unusual conditions and enables operators to react timely to faults in the monitored system, determines normality of these data and triggers an alarm when a significant deviation from normality is detected.

### How does ana::tool work?

ana::tool evaluates measurement data that have been cleaned by the validation module. It identifies unknown and unusual conditions and enables operators to react timely to faults in the monitored system, determines normality of these data and triggers an alarm when a significant deviation from normality is detected. It combines Static Alarms, Dynamic Alarms, Pattern Recognition and Spectral Alarms.

Once an alarm is detected, the user has to provide feedback, so the system can learn what alarms are real and which ones represented normal changes in water quality. This will increase system performance over time. Gradual composition changes (e.g. seasonal variations) are accounted for by automatic training on a moving time window.

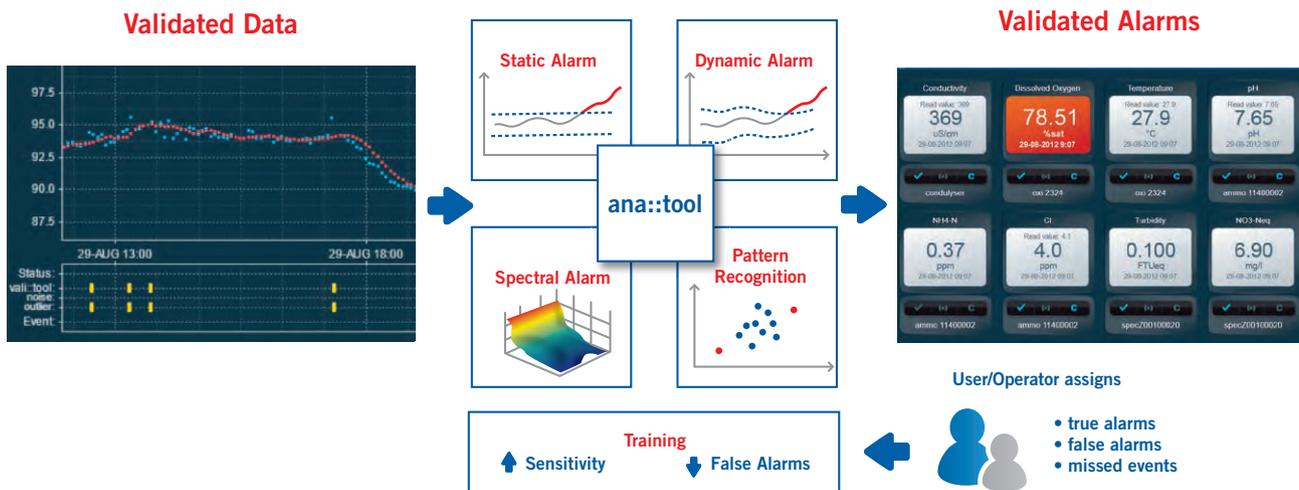

### ana::tool - Highlights

- Unmatched event detection tools based on proven algorithms for real-time event detection that use data streams from all connected probes separately or in combination
- The only software developed by the market leader to be specifically capable of exploiting the enormous information contained in UV spectra which provide the most sensitive and stable data source for event detection
- ana::tool is optimized for use of multi-dimensional spectral data, but will also work with single or multiple one-dimensional inputs
- So far the only one commercial software package that was tested and found suitable by US-EPA water security division
- All event information is automatically aggregated into a “traffic light” output and a “% deviation from normal” output. Furthermore, analogue and digital outputs as well as text notifications can be triggered
- Trains itself on any type of data streams coming in, and will learn automatically which data are useful for event detection, and which ones not

# moni::tool License Options

	free*	one time license fee											
	S-11-04-moni	S-11-08-moni	S-11-24-moni	S-11-64-moni	S-11-data-export	S-11-free-formula	S-11-SMS	S-11-autosampler	S-11-basic-PLC	S-11-camera	S-14-vali	S-15-ana	S-20-MVA
Basic Features	●	●	●	●									
4 Parameters	●												
8 Parameters		●											
24 Parameters			●										
64 Parameters				●									●
Automatic data transfer (via SSH, FTP, TML)					●								●
Configurable mathematical formula						●							●
SMS notification							●						●
Auto sampler feature								●					●
Basic PLC functionality (time control, pulsing, custom bits)									●				●
Camera input										●			●
vali::tool											●	●	●
ana::tool (includes vali::tool)												●	●
Affordable license for all moni::tool features, vali::tool and ana::tool													●

\* The basic features for 4 parameters come free of cost with every con::cube terminal

## Upgrade

S-19-subscription      s::can annual upgrade package for moni::tool

## Services

### data::care packages

S-18-data-4      data::care - quarterly data check and basic report (annual fee, online access required)

S-18-data-12      data::care - monthly data check and basic report (annual fee, online access required)

S-18-data-52      data::care - weekly data check and basic report (annual fee, online access required)

S-VPN-hosting      vpn::host - one year secure remote access from customer PC to con::cube via s::can VPN server

S-VPN-hosting-36      vpn::host - 36 months secure remote access from customer PC to con::cube via s::can VPN server

### custom packages

S-12-custom-tab      Custom moni::tool TAB, individual screen within moni::tool, completely adapted to customers requirements and applications, price on request after exact specification

S-12-custom-formula      Custom formula, individual sophisticated mathematical formulas and algorithms, price on request after exact specification

### setup+training packages

A-vf      vali::tool - setup & evaluation

A-af      ana::tool - training & evaluation

## moni::app

- moni::app is an app that allows you to have an overview of your data from the s::can terminal con::cube on your smartphone
- get the current state of your s::can monitoring station and analyze the data history
- check all parameters, time series, the water's spectral fingerprint and even the status of all your sensors
- wherever you are, simply open the app and immediately find out what is going on in real-time
- you can download moni::app for free for Android via Google Play and iOS via the Apple Store



### technical specification

part number	S-50-moni-app
-------------	---------------

## visu::tool lyte/pro - Data Visualisation and Analysis Tool

- visu::tool is a fast and easy-to-use data visualization software for PCs and notebooks
- in 3 simple steps you can visualize huge amounts of data from con::cube or con::lyte into single or multiple graphs
- the visu::tool “lyte” version is available for free download
- the advanced visu::tool “pro” version includes a vast amount of additional useful offline features such as data aggregation, fingerprint plots, parameter correlation
- read s::can files (.log, .par, .csv, .xlsx and .fp files)
- graphical user interface for parameter selection
- save data as Excel




### technical specification

part number	S-31-visu (visu::tool lyte) S-34-visu (visu::tool pro)
-------------	---

- Spectrometer Probes
- !::scan
- Ionselective Probes
- Physical Probes
- Terminals
- Software
- System Configuration**
- Monitoring Stations
- Spare Parts & Accessories
- Services & Solutions


# System Configuration

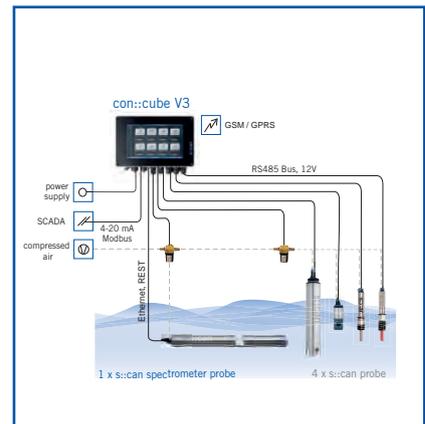

- Spectrometer Probes
- s::can
- Nonselective Probes
- Physical Probes
- Terminals
- Software
- System Configuration
- Monitoring Stations
- Spare Parts & Accessories
- Services & Solutions


## Plug & Measure - System Configuration for con::cube

- s::can high-end IoT (Internet of Things) terminal based on an industrial PC, IP65
- widescreen color graphical display (9") and touch screen
- highly intuitive use, informative visualization & easy operation: time series, optical spectra and all events in clear text
- sensor and station management of up to 64 parameters: automatic cleaning, data logging, sample & calibration including history and multipoint calibration, sensor function check, user management and easy data transfer via USB-stick
- low power operation with less than 3 watts (@ 15 min. measuring interval): wide range AC and DC variants available
- IoT (Internet of Things) and M2M (Machine to Machine) connectivity: 100 Mb/s Ethernet, 300 Mb/s WLAN and optional worldwide WCDMA 4G interface, remote control (http) and data transfer into "Cloud" via FTP, SSH and TML
- process interface to SCADA via Modbus RTU/TCP, SDI-12, Profibus DP, analog 0/4-20 mA and relay outputs (state)
- integration of third-party sensors via analog 0/4-20 mA and digital (solid state) inputs, Modbus RTU/TCP
- easily extendable & all moni::tool features available: 8 slots to customize I/Os, moni::tool software pre-installed, additional software features like online data validation and event detection optional
- process software moni::tool pre-installed; additional software tools (e.g. data validation or event detection) optional
- optional: operation in flow cell

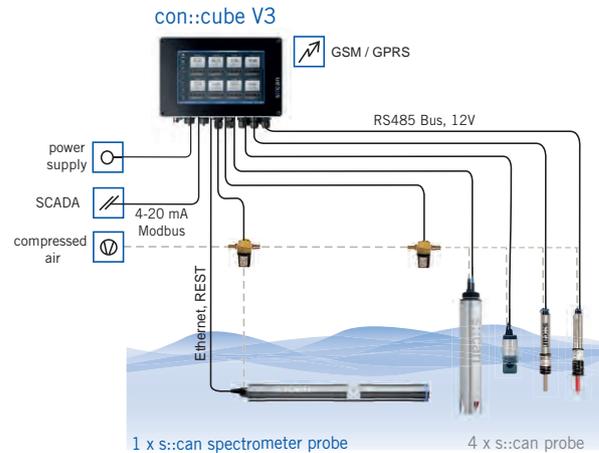

## Plug & Measure - System Configuration for con::line

- con::line low power terminal for battery operated, remote water quality monitoring
- 4G data communication to any cloud system through secure SFTP or SCP connections
- direct plug connection to s::can probes and s::can sensors
- on board storage of measurement data up to one year
- local access to terminal through WLAN interface using lo::Tool
- control of automatic cleaning
- MODBUS TCP or MODBUS RTU uplink to SCADA systems

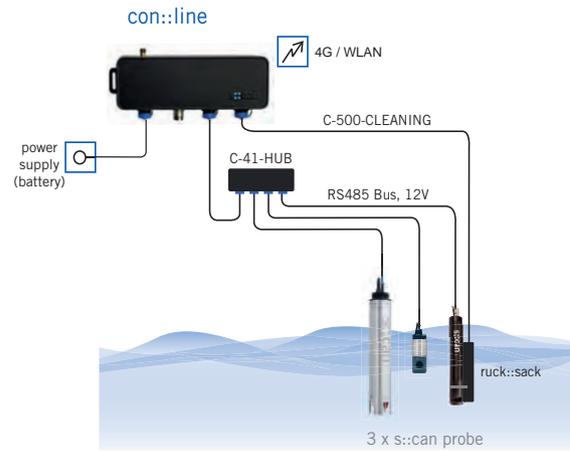

RADAR cloud data platform



visu::tool




lo::Tool (WLAN remote connection)




## Plug & Measure - System Configuration for con::lyte pro

- s::can low-cost terminal designed for control applications
- power efficient LCD display and ergonomic user interface
- sensor and station management of up to 6 parameters
- control of automatic cleaning, data logging, sample & calibration, sensor function check and easy data transfer via USB-stick
- process interface to SCADA or con::cube via Modbus RTU, Profibus DP, analog 4-20 mA and relay outputs (state/PWM/Pulse)
- integration of third-party sensors via analog 0/4-20 mA input and digital (solid state/count) inputs
- outstanding control features: easy threshold and alarm limits with hysteresis, 3 optional PID or 2-point controllers
- certifications: CE, UL, CSA and RCM
- optional: operation in flow cell

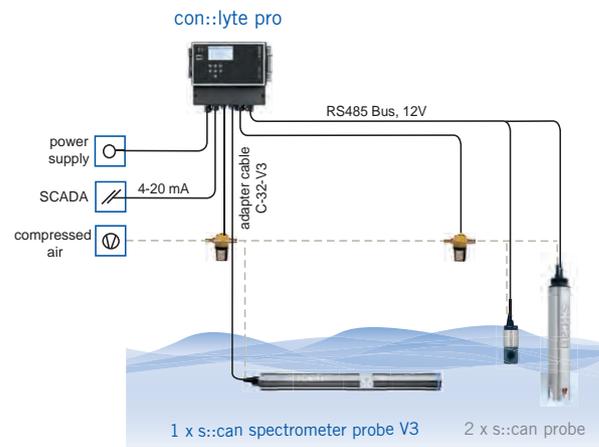

## Plug & Measure - System Configuration for con::nect V3

- s::can connection device for one spectrometer V3 probe and one cleaning device
- operation of one s::can spectrometer V3 probe
- expand con::cube/con::lyte sensors networks (longer distances and higher number of sensors)
- RJ45 connector for wired network access
- spectrometer probe V3 communicates directly with your mobile device via WLAN
- optional: operation in flow cell

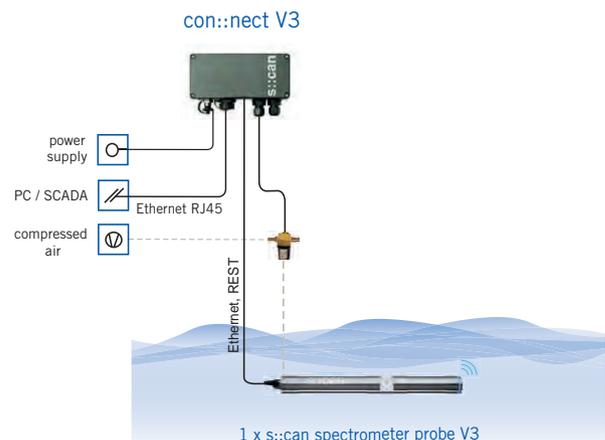

lo::Tool (WLAN remote connection)




visu::tool



- Spectrometer Probes
- i::scan
- Ionselective Probes
- Physical Probes
- Terminals
- Software
- System Configuration**
- Monitoring Stations
- Spare Parts & Accessories
- Services & Solutions

- Spectrometer Probes
- !::scan
- Ionselective Probes
- Physical Probes
- Terminals
- Software
- System Configuration
- Monitoring Stations**
- Spare Parts & Accessories
- Services & Solutions

# Monitoring Stations

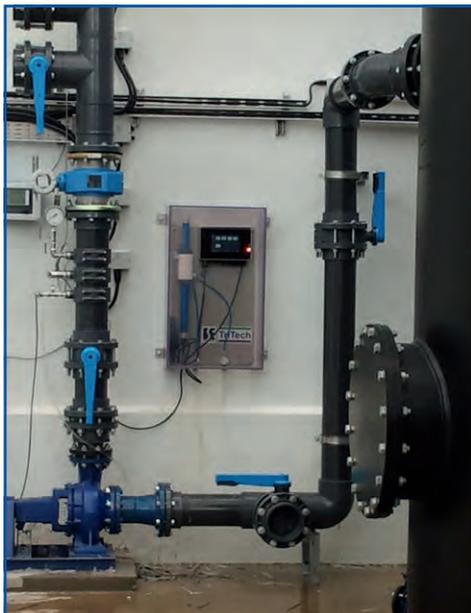


Process control in water treatment plant



Monitoring station

# micro::station - Waste Water

- Spektrometer-sonden
- scan
- Ionenselektive Sonden
- Physikalische Sonden
- Bediengeräte
- Software
- Systemkonfigurationen
- Messstationen
- Ersatzteile & Zubehör
- Services & Solutions

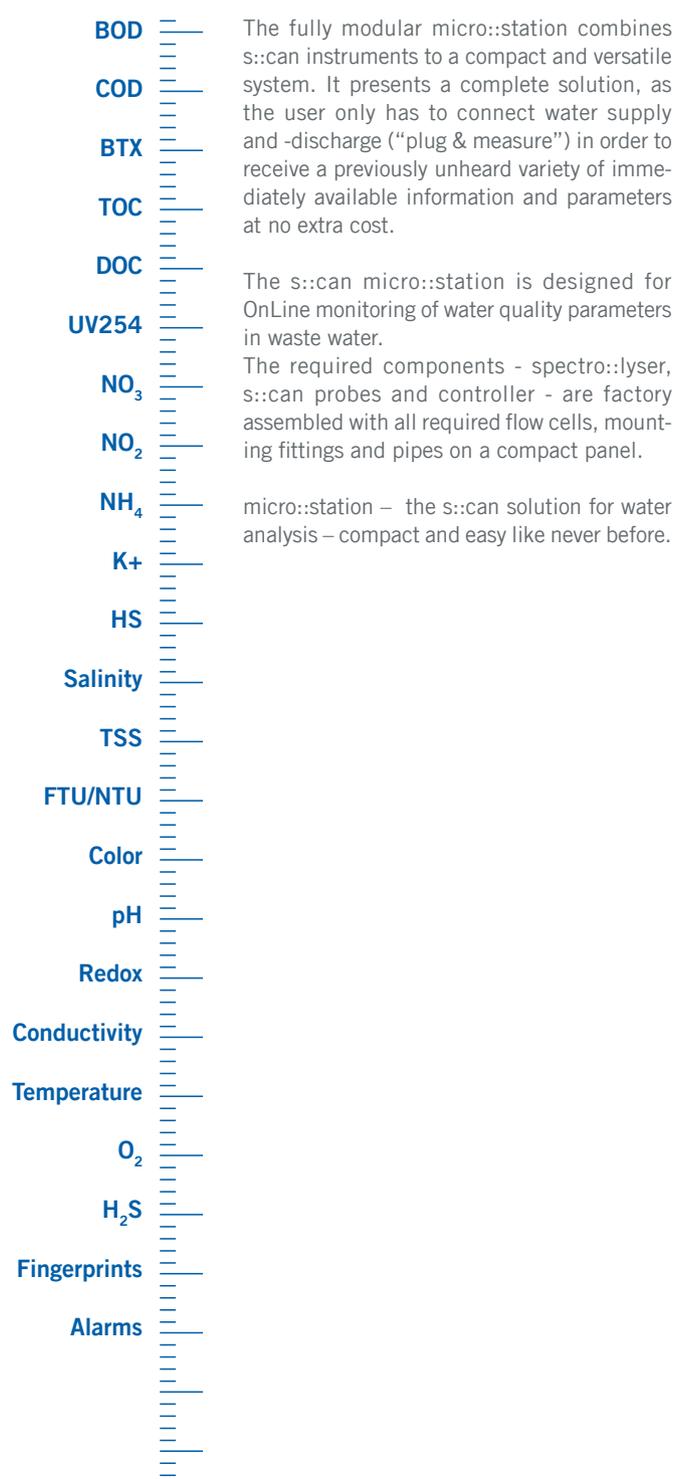

**1 Terminal**  
 compact terminal with monitoring software for data acquisition, data display and station control


**2 Spectrometer probe**  
 All scan spectrometer probes are multi-parameter instruments that can measure a variety of water quality parameters

**Possible parameters:**  
 BOD, BTX, COD, color, DOC, FTU/NTU, H<sub>2</sub>S, HS, NO<sub>2</sub>-N, NO<sub>3</sub>-N, TOC, TSS, UV254, fingerprints and spectral alarms, temperature and pressure

**3 Process connection**  
 Process connection 1", PVC

**4 Flow cell for spectrometer probe**  
 scan spectrometer flow-cell (PVC)

**5 Flow cell for ISE probe or physical probe**  
 Flow cell for soly::lyser, oxy::lyser or scan ISE probe (e.g. ammo::lyser)

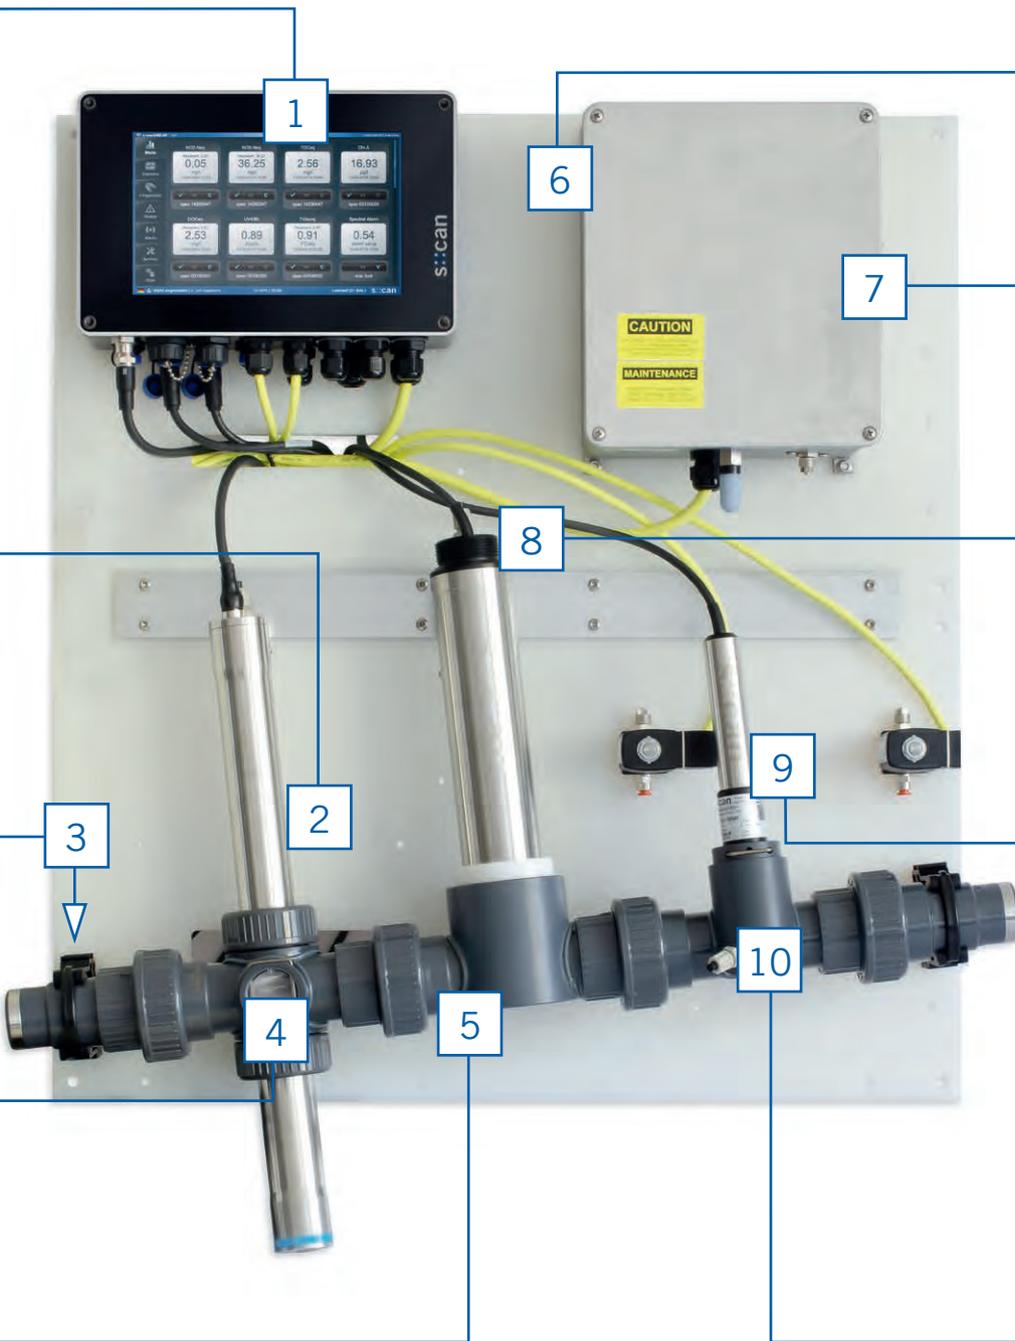

**6 Main panel**

Material: PP  
 Weight of the station (fully equipped):  
 25 kg (+/- 1 kg)

**7 Compressor**

Provides pressurized air for  
 automatic cleaning

**8 Physical probe or ISE probe**

oxi::lyser, soli::lyser or one s::can  
 ISE probe (e.g. ammo::lyser)  
 can be installed here

**Possible parameters:**  
 K<sup>+</sup>, NH<sub>4</sub>-N, NO<sub>3</sub>-N, O<sub>2</sub>, pH, TSS, and  
 temperature

**9 Physical probe**

For installation of one s::can physical  
 probe

**Possible parameters:**  
 pH, redox, salinity, conductivity and  
 temperature


**10 Flow cell for physical probe**

s::can physical probe flow-cell (PVC)

# micro::station - Waste Water


## Options for s::can micro::station

1 Terminal	con::cube V3 con::lyte eco/pro
2 Spectrometer probe	spectro::lyser V3 spectro::lyser (UV) V3 carbo::lyser V3 multi::lyser V3 nitro::lyser V3 uv::lyser V3  i::scan
3 Process connection	process connection 1", PVC
4 Flow cell for spectrometer probe	s::can spectrometer flow-cell (PVC)
5 Flow cell for ISE probe or physical probe	oxi::lyser or soli::lyser flow-cell (PVC) ammo::lyser flow-cell (PVC)
6 Main panel	
7 Compressor	s::can compressor 12 VDC or 110/230 VAC
8 Physical probe or ISE probe	ammo::lyser eco ammo::lyser pro fluor::lyser oxi::lyser soli::lyser
9 Physical probe	pH::lyser redo::lyser condu::lyser chlori::lyser
10 Flow cell for physical probe	s::can physical probe flow-cell (PVC)

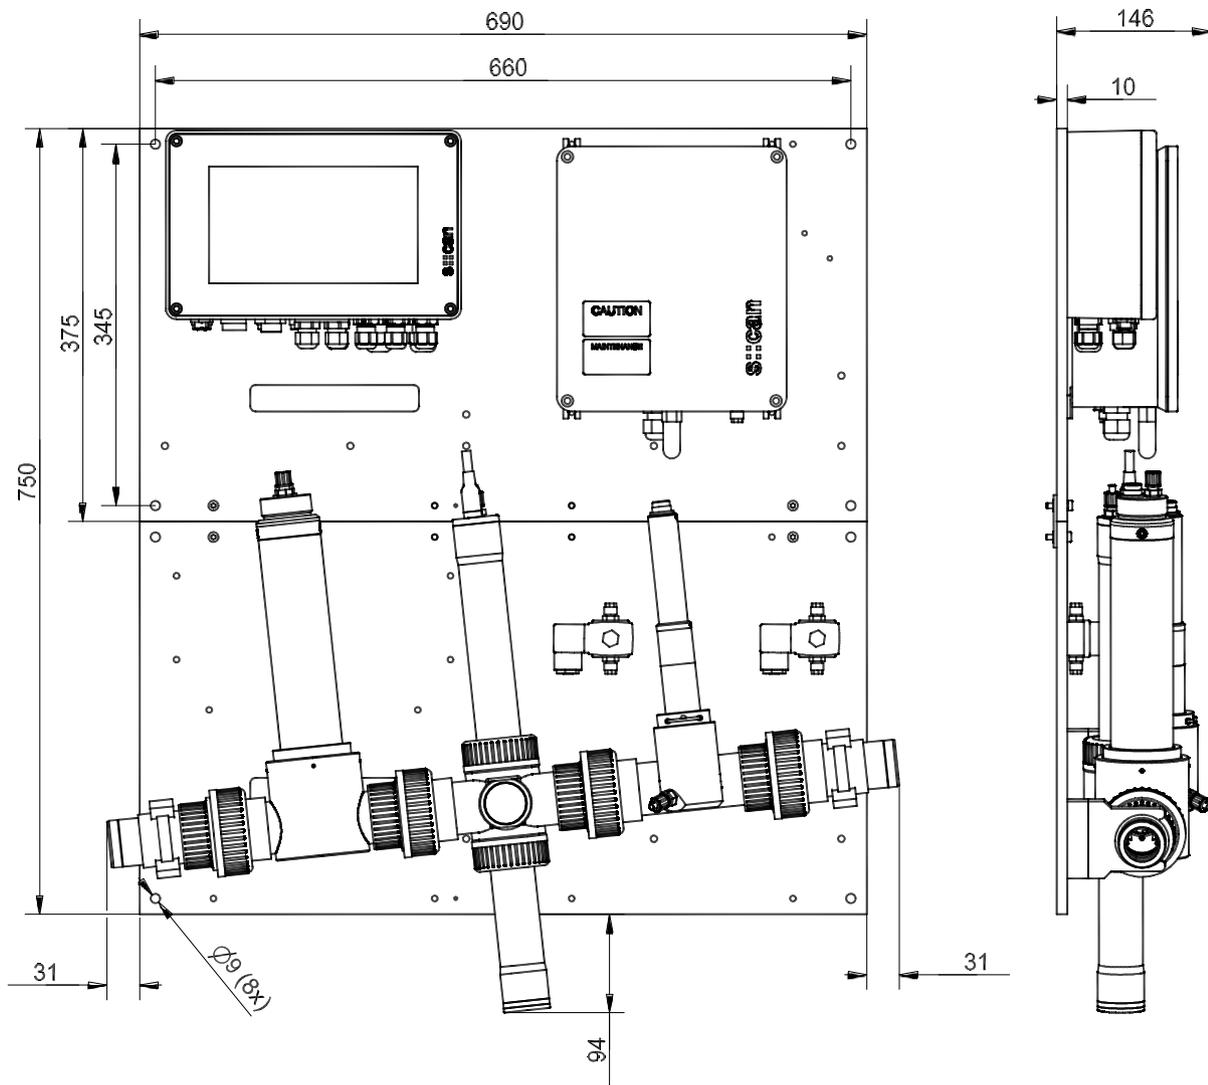

- Spectrometer Probes
- !::scan
- Ionselective Probes
- Physical Probes
- Terminals
- Software
- System Configuration
- Monitoring Stations
- Spare Parts & Accessories**
- Services & Solutions

# Spare Parts & Accessories

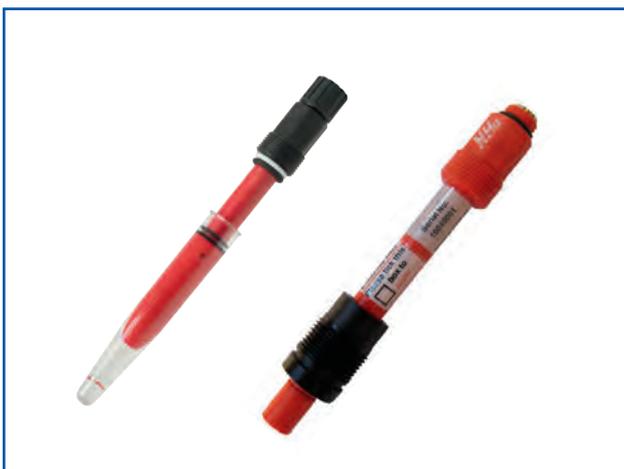

Reference electrode and ammonium electrode for ammonium




brush - brush for submerged installation

## s::can compressor

- provides compressed air for s::can spectrometer probes, oxi::lyser, soli::lyser and ammo::lyser™
- removal of fouling using compressed air
- aluminium housing IP65 for wall mounting
- optional 12 VDC or 230/110 VAC version available
- railing-mounting set available



technical specification	
power supply	type B32-230: 230 VAC type B32-110: 110 VAC type B32-012: 12 VDC
power consumption (typical)	AC 100 W DC 60 W (5.2A @ 12V)
power consumption (max.)	AC 100 W DC 180 W (15A @ 12V)
assembling	ex works
housing material	aluminium
dimensions (width x height x depth)	218 x 253 x 105 mm
weight (min.)	4.9 kg
process connection	1/4"
installation / mounting	Mounting bracket d6 / 0.25 dia
operating temperature	-10 ... 40 °C
operating pressure	0 ... 6 bar
ingress protection class	IP65
tank volume	0.4 l
charging time	typ. 25 sec
sound emission	60dB(A)
maintenance interval	1500 operating hours
storage temperature	-10 ... 60 °C
storage humidity	0 ... 95 %
conformity - EMC	EN 61326-1:2006
conformity - safety	EN 61010-1:2001
part number	B-32-230 B-32-110 B-32-012

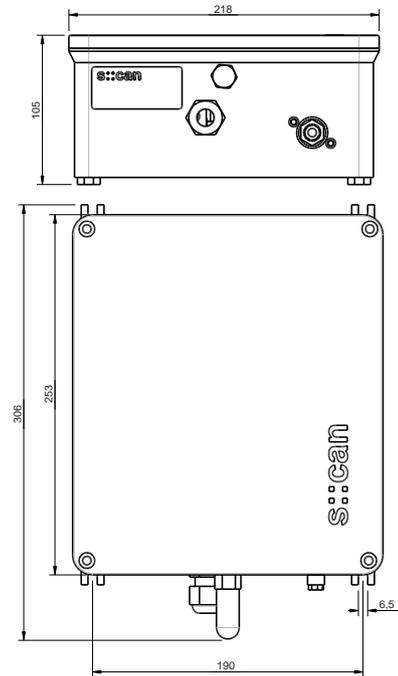

to be used for	
ammo::lyser™ pro	
ammo::lyser™ eco	
oxi::lyser™	
carbo::lyser™ II / III - V3	
multi::lyser™ IV - V3	
nitro::lyser™ II - V3	
ozo::lyser™ II - V3	
uv::lyser™ V - V3	


recommended accessories	
part number	article name
B-44	cleaning valve
B-44-2	
C-31-eu	Optional 2 m power cable
C-31-us	Optional 2 m power cable

## cleaning valve


- supports automatic cleaning of measuring elements of von s::can spectrometer probes, oxi::lyser, soli::lyser and ammo::lyser™
- removal of fouling, sediments and clogging using compressed air or -water
- version B-44-2 specially for use in combination with the s::can compressor

technical specification	
cable length	2.4 m (B-44) 1 m (B-44-2)
assembling	ex works
dimensions (width x height x depth)	85 x 75 x 70 mm
weight (min.)	500 g
process connection	B-44: pressure side DIN 7.2 coupling, at sensor direction ID 3/8" B-44-2: pressure side quick coupling d6x4, at sensor direction push-pull d6x4
ingress protection class	IP65
part number	B-44 B-44-2

recommended accessories	
part number	article name
B-41	s::can pressure connection set for V2 spectro::lyser and s::can sensors

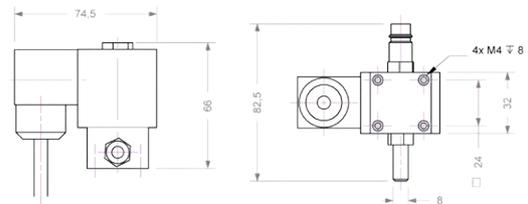

B-44

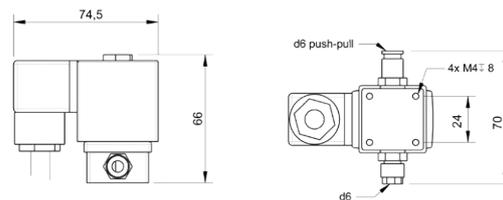

B-44-2

## ruck::sack

- submersible Autobrush for spectrometer probes and i::scan
- exchangeable brushes for spectrometer probe with path length 35, 15, 5 mm and i::scan 35 and 5 mm
- one basis module (motor unit) for all versions
- shelter protects the brush from clogging



technical specification	
power supply	12 VDC
power consumption (typical)	150 mA (average)
power consumption (max.)	300 mA
cable length	8 m
housing material	POM-C
dimensions (width x height x depth)	182 x 46 x 36.5 mm
weight (min.)	750 g (incl. cable)
installation / mounting	submersed
operating pressure	0 ... 0.5 bar
ingress protection class	IP68
storage temperature	-20 ... 80 °C
storage humidity	0 ... 95 %
part number	F-146-rs-35, F-146-rs-15, F-146-rs-05, F-146-rs-iscan-35, F-146-rs-iscan-05

to be used for	
Spectrometer Probes	
i::scan	

recommended accessories	
part number	article name
F-146-brush-35	brush for ruck::sack 35 mm (spare part)
F-146-brush-15	brush for ruck::sack 15 mm (spare part)
F-146-brush-05	brush for ruck::sack 5 mm (spare part)

## pressure mounting for i::scan in-pipe installation (i::scan removal under pressure)

- for proper and easy installation of one i::scan in a pressure pipe
- under pressure drilling of pipes possible (for PE, PVC, DCI, steel and AC pipes)
- the i::scan can be mounted and demounted under pressure without interruption of the water flow

technical specification	
housing material	stainless steel
dimensions (height)	550 mm (max.)
weight (min.)	5 kg
process connection	for DCI, steel and AC pipes: DN80 ... DN600 (others on request)
	for PE- and PVC-pipes: pipe outside diameter 75 ... 315 mm
operating pressure	0 ... 12 bar
part number	F-160-iscan

to be used for
i::scan



recommended accessories	
part number	article name
F-160-SP-SET-DKxxx	Hawle shut off pipe saddle DK75 - DK315, incl. saddle blade (for PE and PVC pipes)
F-160-SP-SET-DNxxx	Hawle shut off pipe saddle DN80 - DK600, incl. saddle blade (for ductile iron pipes)

## flow cell autobrush - for spectro::lyser V3 & V2 pathlength 35 mm

- for proper and easy flow-through installation of s::can spectrometer probes
- for applications with frequent, automatic cleaning
- cleaning of optical windows with rotating brush without demounting of spectrometer probe

technical specification	
power supply	12 VDC
assembling	ex works
housing material	POM-C
dimensions (width x height x depth)	74 x 132 x 153 mm
weight (min.)	1 kg
process connection	G 1/4"
installation / mounting	flow cell
operating temperature	0 ... 40 °C
operating pressure	0 ... 6 bar
ingress protection class	IP66
part number	F-446-1

to be used for
Spectrometer Probes



recommended accessories	
part number	article name
F-501-eco-us	System Panel micro::station US
F-501-eco-eu	System Panel micro::station EU
F-45-process	process connection 1/4" G

## flow cell for four s::can physical probes

- for proper and easy flow-through installation of condu::lyser, chlori::lyser, redo::lyser and pH::lyser
- for applications without automatic cleaning in drinking water

### technical specification

housing material	POM-C
dimensions (Ø x l)	106 x 103
weight (min.)	1.05 kg
process connection	G 1/4", hose nozzle 7mm
installation / mounting	flow cell
operating temperature	0 ... 50 °C
operating pressure	0 ... 6 bar
part number	F-45-four

### to be used for

condu::lyser
redo::lyser
pH::lyser
chlori::lyser (analog)



## i::scan flow cell for up to 3 additional s::can probes

- for proper and easy flow-through installation of one i::scan and up to three s::scan physical probes
- automatic cleaning with autobrush for i::scan available (optional)

### technical specification

housing material	POM-C
dimensions (Ø x l)	106 x 103
weight (min.)	1 kg (without autobrush)
process connection	G 1/4", hose nozzle 7mm
installation / mounting	flow cell
operating temperature	0 ... 50 °C
operating pressure	0 ... 6 bar
part number	F-46-four-iscan

### to be used for

condu::lyser
redo::lyser
pH::lyser
chlori::lyser (analog)
i::scan

### recommended accessories

part number	article name
F-501-eco-us	System Panel micro::station US
F-501-eco-eu	System Panel micro::station EU
F-45-process	process connection 1/4" G
F-45-strain	Inlet strainer



## s::can flow-cell (by-pass setup), PVC (wastewater)

- side-by-side stackable flow cells for waste water applications (add-on dimension 177 mm)
- cleaning with pressurized air possible

technical specification	
housing material	PVC
dimensions (width x height x depth)	ammo::lyser: 117 x 83 x 108 mm i::scan: 177 x 83 x 90 mm oxi::lyser: 177 x 117 x 141 mm physical probe: 177 x 95 x 111 mm spectrometer probe: 177 x 98 x 126 mm
process connection	G 1" inner thread
recommended flow	< 40 l/min
part number	F-48-ammo F-48-iscan F-48-oxi F-48-sensor F-48-spectro



recommended accessories	
part number	article name
F-48-process	process connection 1", PVC

## auto::blade

- Mechanical Cleaning for spectrometer probes with path length 5 mm
- Mounting on F-48-V3 wastewater flow cell
- Exchangeable wiper blades
- Set of cleaning and valve unit

technical specification	
power supply	12 VDC
power consumption (typical)	200 mA
cable length	1.5 m
tube length	1.5 m
housing material	stainless steel POM-C
dimensions (width x height x depth)	cleaning unit: 89 x 40 x 193 mm valve unit: 66 x 143 x 86 mm
weight (min.)	cleaning unit: 320 g valve unit: 340 g
operating temperature	0 ... 45 °C
operating pressure	1 ... 8 bar
ingress protection class	IP65
storage temperature	-20 ... 80 °C
storage humidity	0 ... 95 %
part number	F-550-05

to be used for	
Spectrometer Probes	



recommended accessories	
part number	article name
F-550-BLADE-05	Cleaning Blades 5 mm, spare part for auto::blade, set of 2
F-48-V3	spectrometer V3 & V2 flow-cell (bypass setup), PVC
B-32-230	s::can compressor
B-32-110	
B-32-012	

**Spectrometer infrastructure**

part number	article name
A-001-s	Inserts for optical pathlength 1 mm, stainless steel
A-002-s	Inserts for optical pathlength 2 mm, stainless steel
A-005-s	Inserts for optical pathlength 5 mm, stainless steel
A-015-s	Inserts for optical pathlength 15 mm, stainless steel
A-500-s	Inserts for optical pathlength 0.5 mm, stainless steel
A-005-q	Inserts for optical pathlength 5 mm, stainless steel, special quartz windows
A-015-q	Inserts for optical pathlength 15 mm, stainless steel, special quartz windows
A-035-s	Cleaning insert for optical pathlength 35 mm, stainless steel
E-421-2	Multifunctional slide for pathlength 100 mm
E-431-1-iscan	multifunctional slide i::scan 35 mm
E-431-2-iscan	multifunctional slide i::scan 5 mm
E-421-V3	Multifunctional slide (for spectrometer V3 & V2 pathlength 0,5 mm to 35 mm)
V3-logger	License fee for integrated data logger in spectro::lyser V3 or G::series V3

**Sensors infrastructure**

part number	article name
E-509-1/2-EL	Hydrogen Peroxide electrolyte (spare part)
E-509-1/2-SET	Hydrogen Peroxide membrane cap (spare part)
E-510-guard	Electrode protection shelter (spare part)
E-513-ORP	ORP & reference electrode for redo::lyser (spare part)
E-514-pH	pH & reference electrode for pH::lyser (spare part)
E-515-1/2-EL	Peracetic Acid electrolyte (spare part)
E-515-1/2-SET	Peracetic Acid membrane cap (spare part)
E-520-1/2-KIT	Free Chlorine electrolyte and membrane cap (spare parts)
E-525-1/2-KIT	Total Chlorine electrolyte and membrane cap (spare parts)
E-528-1/2-KIT	Chlorine Dioxide electrolyte and membrane cap (spare parts)
E-532-ise-K	potassium electrode for ammo::lyser™ (spare part, new)
E-534-ise-NH4	Ammonium electrode for ammo::lyser™ (spare part, new)
E-532-ise-NO3	Nitrate electrode for ammo::lyser V1 (spare part, new)
E-532-ise-pH	pH electrode for ammo::lyser V1 (spare part, new)
E-532-ise-ref	reference electrode for ammo::lyser V1 (spare part, new)
E-532-tool	Tool for s::can ISE probes (spare part)
E-533-ise-Cl	Chloride electrode for ammo::lyser V2 (spare part, new)
E-533-ise-K	Potassium electrode for ammo::lyser V2 (spare part, new)
E-535-ise-NH4	Ammonium electrode for ammo::lyser V2 (spare part, new)
E-533-ise-NO3	Nitrate electrode for ammo::lyser V2 (spare part, new)
E-533-ise-pH	pH electrode for ammo::lyser V2 (spare part, new)
E-533-ise-ref	Reference electrode for ammo::lyser V2 (spare part, new)
E-542-ise-F	Fluoride electrode for fluor::lyser V1 (spare part, new)
E-543-ise-F	Fluoride electrode for fluor::lyser V2 (spare part, new)
E-632-ise	Refurbishment of ionselective electrodes for s::can ISE probes
E-632-ise-K	Refurbished Potassium electrode for ammo::lyser V1 (spare part, refurbished)
E-634-ise-NH4	Refurbished Ammonium electrode for ammo::lyser V1 (spare part, refurbished)
E-632-ise-NO3	Refurbished Nitrate electrode for ammo::lyser V1 (spare part, refurbished)
E-633-ise-K	Refurbished Potassium electrode for ammo::lyser V2 (spare part, refurbished)
E-635-ise-NH4	Refurbished Ammonium electrode for ammo::lyser V2 (spare part, refurbished)
E-633-ise-NO3	Refurbished Nitrate electrode for ammo::lyser V2 (spare part, refurbished)

**Cleaning & Pressure Devices**

part number	article name
B-44	Cleaning valve
B-44-2	
B-32-230	s::can compressor
B-32-110	
B-32-012	
B-32-m-012	Motor unit for compressor (12 VDC)
B-32-m-110	Motor unit for compressor (110 VAC)
B-32-m-230	Motor unit for compressor
B-32-service	Service kit for s::can compressed air supply
B-41	s::can pressure connection set for V2 spectro::lyser and s::can sensors
B-43-2	10 x desiccant
B-45-V2	PVC clips (spare part for V2 spectro::lyser), set of 2
B-60-1	Cleaning brush for pathlength < 15 mm
B-60-2	Cleaning brush for pathlength < 2 mm
B-61-1	Cleaning agent

**Cables & Power Supply**

part number	article name
C-1-010-sensor	1 m connection cable for s::can physical and ISE probes
C-210-sensor	10 m extension cable for s::can physical probes and s::can ISE probes
C-210-spectro	10 m extension cable for s::can™ spectrometer probes
C-220-sensor	20 m extension cable for s::can physical probes and s::can ISE probes
C-220-spectro	20 m extension cable for s::can™ spectrometer probes
C-230-sensor	30 m extension cable for s::can physical probes and s::can ISE probes
C-230-spectro	30 m extension cable for s::can™ spectrometer probes
C-31-eu	Optional 2 m power cable
C-31-us	Optional 2 m power cable
C-41-hub	Distribution box for additional sensors such as i::scan, sensors & ISE probes (3 x IP67 sys plug connections, RS485, 12 VDC) incl. C-1-010-sensor
C-210-V3	10 m extension cable for s::can spectrometer probe V3 (M12-plug, Ethernet, 12 VDC)
C-220-V3	20 m extension cable for s::can spectrometer probe V3 (M12-plug, Ethernet, 12 VDC)
C-32-MIL	Adapter cable to connect a V2 spectrometer (MIL) to V3 Terminal (M12)
C-32-V3	Adapter cable to connect a V3 spectrometer (M12) to V2 Terminal (MIL Plug)
C-500-ETHERNET	network adapter cable 30 cm
C-500-POWER-030	power cable (con::line), 2 pin Buccaneer (loose ends), 3 m cable
C-500-UPLINK-075	M12 modbus/ethernet to SCADA for con::line (loose ends) 7.5 m cable
C-500-UPLINK-010	M12 modbus/ethernet to SCADA for con::line (loose ends) 1 m cable
C-500-CLEANING	adapter for autobrush/ruck::sack/B44 claning valve for con::line, IP68
C-500-PIPESCAN-CABLE	12 pin Buccaneer to pipe::scan hub, 10 m cable
C-500-IO-BOX	adapter box 12 pin Buccaneer to terminal clamps, 0.5 m cable IP67, 2 cable glands


**Operation, Visualisation and Additional Interfaces**

part number	article name
D-303-LX	Linux Application Licence (obligatory to D-330)
D-315-3GLX	Worldwide 3D internet connection via Quad-band HSPA (up to 5.7 Mbps/21 Mbps)
D-330-ANTENNA-PLUG	Internal antenna adapter cable and connector, option for con::cube
D-330-antenna-pro	External, high range antenna option for con::cube, incl. 3 m extension cable
D-315-in-mA	2 analogue inputs (input module), provides 2 analogue inputs (4-20mA) for integration of 3rd party readings
D-315-in-relay	2 digital inputs (input module), provides 2 digital IN (5-24V) for integration of 3rd party readings
D-315-out-mA	2 analogue outputs (output module), provides data transfer to PLC systems
D-315-out-profibus	provides Profibus DPV0 for data transfer to PLC systems
D-315-out-relay	4 digital outputs (output module), provides 4 configurable relay contacts 1A
D-315-out-SDI12	SDI 12 (output module), provides SDI 12 for data transfer to PLC systems
D-319-logger	Datalogger option for con::lyte
D-319-out-mA	2 x 4 - 20 mA (output module for con::lyte)
D-319-out-profibus	Profibus (output module for con::lyte)
D-320-out-mA	License for 3 analog outputs (4-20 mA) for con::lyte pro
D-320-OUT-MODBUS	Modbus (software license for con::lyte D-320)
D-320-PID	3 x PID control output for con::lyte D-320
D-500-DIN-ADAPTER	DIN Rail mounting set (for con::line)
D-330-ANTENNA-CABLE	10 m antenna extension cable
D-330-4GLX	Worldwide 4G internet connection via 7-band HSPA+ (21 Mbps/5.7 Mbps)

Installation	
part number	article name
F-51	weather shield for s::can terminals
F-110-iscan	carrier i::scan, for easy horizontal attachment
F-110-V3	carrier s::can spectrometer V3 & V2 probe, 45°
F-110-V3	Carrier s::can spectrometer V3 & V2 probe, for easy 45 degree attachment
F-120-V3	Carrier s::can spectrometer V3 & V2 probe, for easy vertical attachment
F-11-oxi-ammo	carrier oxi::lyser / soli::lyser / s::can ISE probes
F-120-iscan	carrier i::scan, for easy vertical attachment
F-120-V3	carrier s::can spectrometer V3 & V2 probe, vertical attachment
F-12-sensor	carrier s::can physical probes
F-130-iscan	carrier i::scan, for easy 45° attachment
F-140-iscan	simple mounting for i::scan in-pipe installation
F-140-V3	Carrier s::can spectrometer V3 & V2 probe, for easy 45 degree attachment (new design)
F-146-brush-05	brush for ruck::sack 5 mm (spare part)
F-146-brush-15	brush for ruck::sack 15 mm (spare part)
F-146-brush-35	brush for ruck::sack 35 mm (spare part)
F-146-brush-iscan-35	brush for ruck::sack 35 mm i::scan (spare part)
F-146-brush-iscan-05	brush for ruck::sack 5 mm i::scan (spare part)
F-146-retro-05	ruck::sack retrofitting set to 5 mm OPL
F-146-retro-15	ruck::sack retrofitting set to 15 mm OPL
F-146-retro-35	ruck::sack retrofitting set to 35 mm OPL
F-15	fixing adapter - stainless steel
F-150-V3	Carrier s::can spectrometer V3 & V2 probe, for easy vertical attachment (new design)
F-160-iscan	In-pipe Hawle i::scan fixture (ideal for -000 i::scan version), i::scan removal under pressure, for DN 80-600 pipes, pipe saddle must be ordered separately!
F-445-2	flow cell - for pathlength 100 mm
F-446-V3	flow cell AutoBrush, POM-C (for spectrometer V3 & V2 pathlength 35 mm)
F-446-2	flow cell autobrush - for spectro::lyser™ pathlength 100 mm
F-446-brush	brush for flow-cell AutoBrush (spare part)
F-446-brush-iscan	brush for flow-cell AutoBrush i::scan (spare part)
F-446-m	brush unit for flow-cell AutoBrush (spare part)
F-446-m-iscan-dw	brush unit for flow-cell Auto-Brush i::scan
F-45-alarm	Flow detector unit
F-45-ammo	flow cell for ammo::lyser™
F-45-flow-1	Automatic flow control unit
F-45-FLOW-1-MICRO	Automatic flow restrictor unit for micro::station (push/pull)
F-45-FLOW-1-NANO	Automatic flow restrictor unit for nano::station (push/pull)
F-45-four	flow cell for four s::can physical probes
F-45-oxi	flow cell for oxi::lyser™ and soli::lyser
F-45-sensor	flow cell for s::can sensor
F-45-strain	Inlet strainer
F-45-valve	Flow adjustment valve
F-46-four-iscan	i::scan flow cell for up to 3 additional s::can probes
F-46-iscan	i::scan flow-cell (by-pass setup), Pom-C, without cleaning
F-46-PROCESS	Process connection 1/4" G, set of 4
F-48-ammo	ammo::lyser flow-cell (by-pass setup), PVC
F-48-iscan	flow cell for i::scan (waste water), PVC
F-48-oxi	oxi::lyser or soli::lyser flow-cell (by-pass setup), PVC
F-48-process	process connection 1", PVC
F-48-sensor	s::can Sensor flow-cell (by-pass setup), PVC
F-48-V3	spectrometer V3 & V2 flow-cell (bypass setup), PVC
F-500-HOSE	Adapter kit for F-45-FLOW-1/F-45-ALARM (push/pull)
F-500-p	Pressure Sensor for micro::station
F-500-pump	Drinking water pump for micro::station
F-500-service-set	Service set for micro::station
F-501-eco-eu	System Panel micro::station EU
F-501-eco-us	System Panel micro::station US
F-502-eco-eu	System Panel micro::station add-on module EU
F-502-eco-us	System Panel micro::station add-on module US
F-506-panel-eu	System panel nano::station EU
F-506-panel-us	System panel nano::station US
F-508-panel	System panel waste water micro::station
F-160-SPSET-DKxxx	Hawle shut off pipe saddle DK75 - DK315, incl. saddle blade (for PE and PVC pipes)
F-160-SPSET-DNxxx	Hawle shut off pipe saddle DN80 - DK600, incl. saddle blade (for ductile iron pipes)
F-445-V3	Flow-cell (by-pass fitting), Pom-C (for spectrometer V3 & V2 pathlengths from 1 mm to 35 mm)
F-446-V3-ti	Flow-cell (by-pass fitting) AutoBrush, Pom-C (for spectrometer V3 & V2 pathlength 35 mm) titanium version
F-446-2	flow cell autobrush - for spectro::lyser™ pathlength 100 mm
F-550-BLADE-05	Cleaning Blades 5 mm, spare part for auto::blade, set of 2
F-450-PS-BASE	pipe::scan base unit: FlowCell incl. adapter plate, nano pump, insertion nozzle, vent valve and enclosure
C-450-PS-HUB	cable hub for pipe::scan: 4 x sensor cables, 1 x cable for pressure sensor, socket for AutoBrush, socket for cable to con::cube

# Services & Solutions

**s::can**  
A Badger Meter® Brand

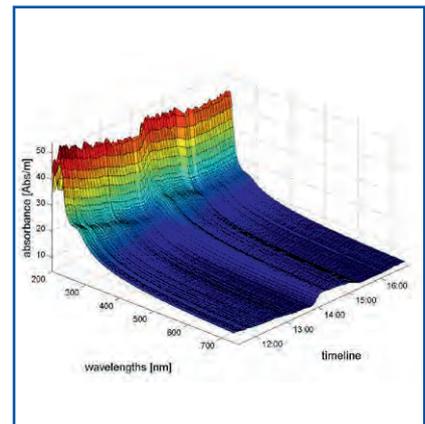

Spectrometer Probes

i::scan

Ionselective Probes

Physical Probes

Terminals

Software

System Configuration

Monitoring Stations

Spare Parts & Accessories

Services & Solutions

## parameter X1

- individual local calibration by s::can Support
- based on chemometric methods (PCA/PLS), incl. statement of statistical quality
- s::can feasibility study A-xf and validated laboratory results are precondition
- individual quotation from s::can Sales & individual clarification by s::can Support precondition

### technical specification

part number	A-x1
-------------	------

## feasibility study

- individual, substance specific spectral analysis by s::can Support
- prediction of substance-specific range & precision in distilled water
- considering possible background of solids
- recommendation of optical pathlength & possible standard applications, incl. scientific report
- no on-site sampling necessary
- background of solids required
- precondition for contamispac validation & parameter X

### technical specification

part number	A-xf
-------------	------

## 1 hour consulting, data handling

- 1 hour consulting, data handling

### technical specification

part number	I-C
-------------	-----

## start up deployment of one s::can monitoring system on site

- start up deployment of one s::can monitoring system on site

### technical specification

part number	I-I
-------------	-----

## 1 hour service

- 1 hour service

### technical specification

part number	I-S
-------------	-----

## 1 hour engineer, service on site

- 1 hour engineer, service on site

technical specification	
part number	I-T

## 3 years service i::scan

- 3-year check and service of i::scan incl. 3-year guarantee extension

technical specification	
part number	X-03-iscan

## 3 years service spectro::lyser

- 3-year check and service of spectro::lyser incl. 3-year guarantee extension

technical specification	
part number	X-03-spectro

## assembly of s::can systems


- mounting of flow-cells on system panel
- mounting of terminals and additional components on system panel / weather shield
- wiring of autobrush / cleaning valve / pressure sensor / flow detector
- obligatory for s::can micro::station

technical specification	
part number	X-sys-assy


## configuration of s::can systems

- initialisation of all s::can probes and initialisation of all parameters
- initialisation of autobrush / cleaning valve / pressure sensor / flow detector
- check of system configuration and test certificate

technical specification	
part number	X-sys-config

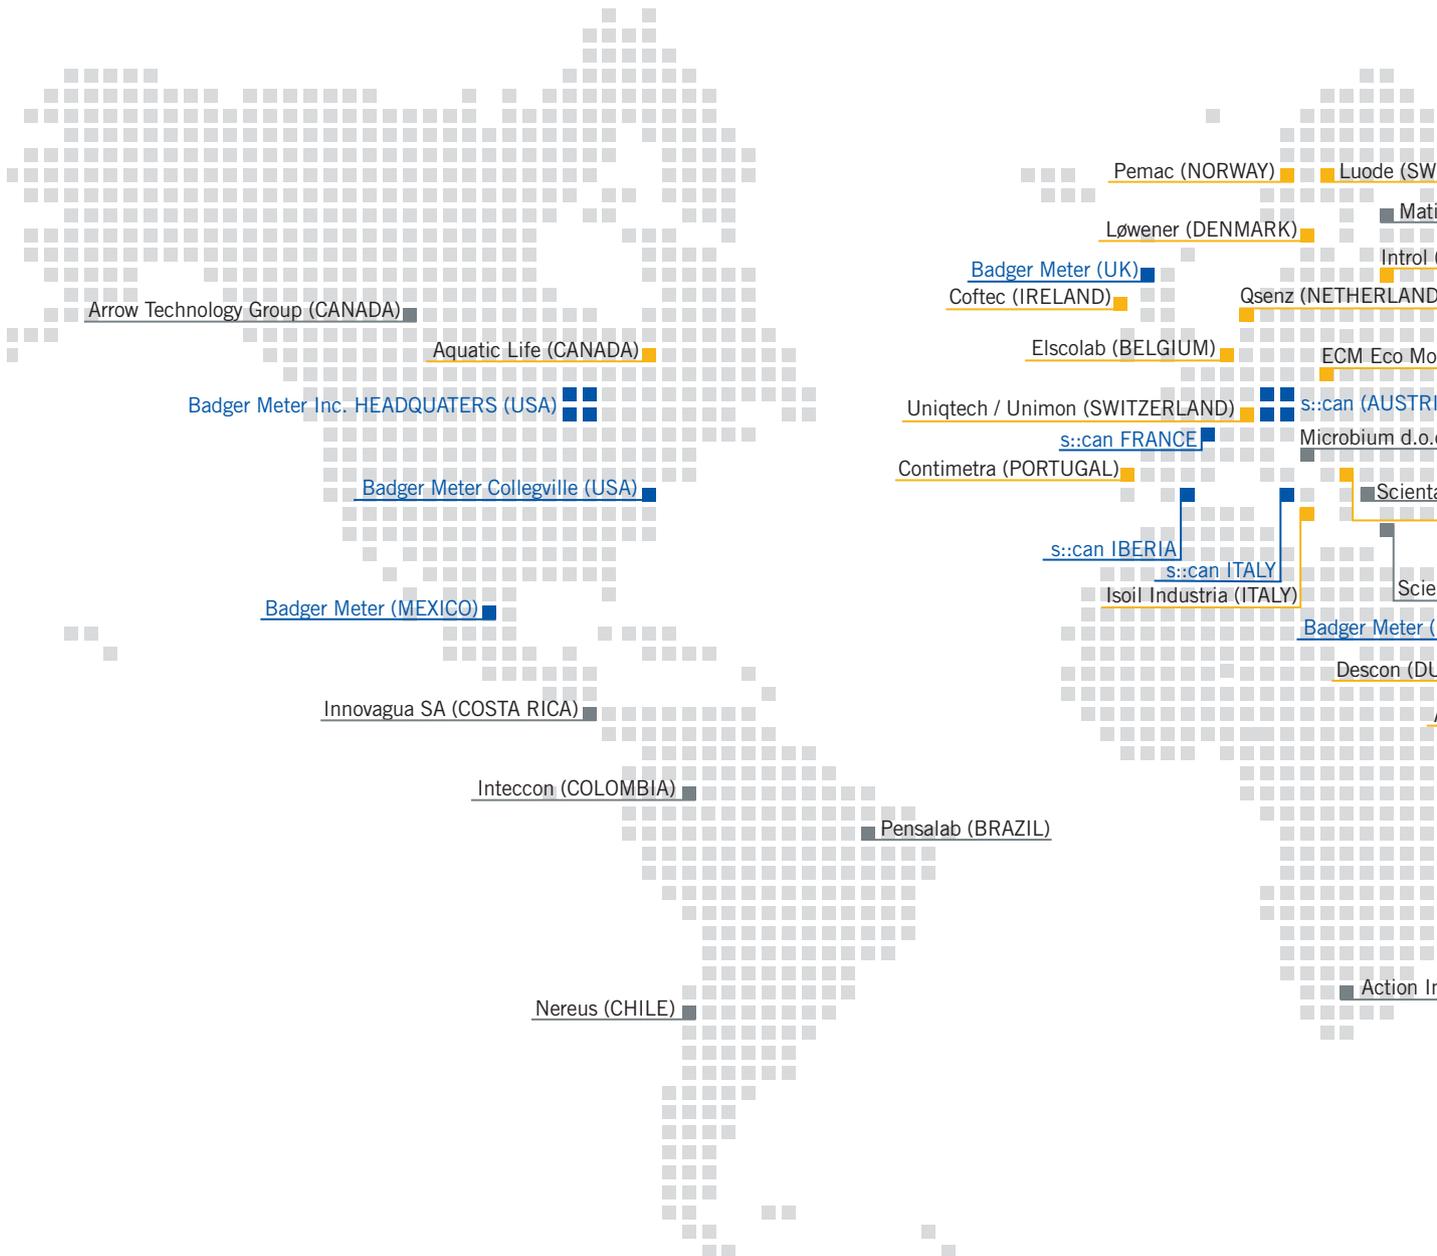

- STATUS :: Headquarters, Representative Office, Affiliate
- STATUS :: Gold Sales Partner
- STATUS :: Silver Sales Partner

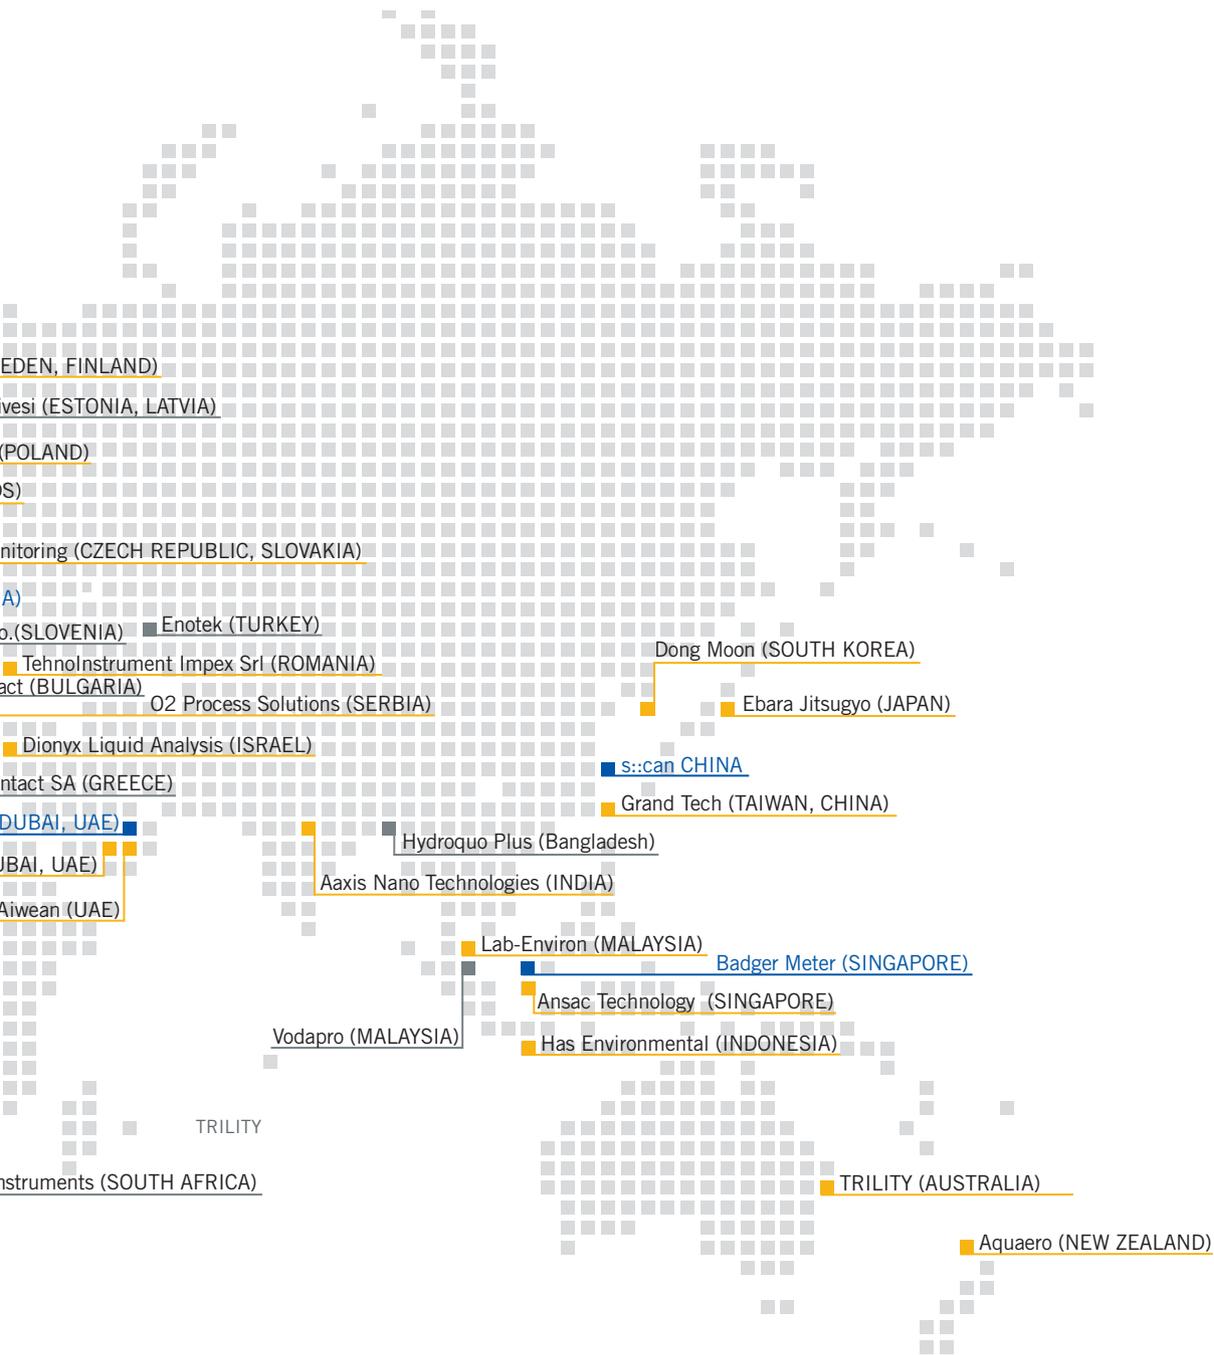

# s::can Sales Partners

<b>US</b>	<b>HEADQUARTERS ADDRESS</b>	Badger Meter Inc. 4545 W Brown Deer Rd, Milwaukee, WI 53223, USA +1 / 414 355 04 00 www.badgermeter.com	<b>MX</b>	<b>MEXICO CONTACT</b>	Badger Meter Mexico Efrain Hernández Reyes +52 / 4044 8729 sales@s-can.mx www.s-can.mx
<b>US</b>	<b>USA ADDRESS</b>	Badger Meter Collegeville 6 Iron Bridge Drive Collegeville, PA 19426, USA +1 / 888 694 32 30 sales@s-can.us www.s-can.us	<b>AE</b>	<b>UNITED ARAB EMIRATES ADDRESS</b>	Aiwaen Innovative Engineering LLC  2-052, Insta Space Business Center Co Dubai Xavier Craysac +971 / 545 564 300 info@waen.ai www.waen.com Gold Sales Partner
<b>AT</b>	<b>AUSTRIA ADDRESS</b>	s::can GmbH Brigittagasse 22-24 1200 Vienna, AUSTRIA Robert Wurm +43 / 1 / 219 73 93 sales@s-can.at www.s-can.at	<b>AE</b>	<b>UNITED ARAB EMIRATES ADDRESS</b>	Descon Automation Control System LLC  14675, Dubai, U.A.E. Al Qusais Industrial Area 4, Warehouse 1 & 2 United Arab Emirates Lord Rajpar +971 / 2 551 94 45 info@desconllc.com www.desconllc.com Gold Sales Partner
<b>ES</b>	<b>SPAIN ADDRESS</b>	s::can Iberia Sistemas de Medición S.L.U. Ciutat de Granada 28 bis, 1a planta 08005 Barcelona Jordi Raich +34 / 930 218 447 sales@s-can.es www.s-can.es		<b>CONTACT PHONE</b>	
<b>FR</b>	<b>FRANCE ADDRESS</b>	s::can France SARL 370 route de Saint Canadet 13100 Aix en Provence Philippe Marinot +33 / 4 42 20 35 01 sales@s-can.fr www.s-can.fr	<b>AU</b>	<b>AUSTRALIA ADDRESS</b>	TRILITY 27 Commerce Circuit, Yatala, QLD, 4207 Viral Tripathi +61 / 8 8408 6500 VTripathi@trility.com.au www.trility.com.au Gold Sales Partner
<b>IT</b>	<b>ITALY CONTACT</b>	s::can in Italy Alessandro Morra +39 / 333 983 5634 amorra@s-can.at www.s-can.at	<b>BD</b>	<b>BANGLADESH ADDRESS</b>	Hydroquo Plus Bangladesh Ltd. House-108, Road-11, Block-C, Banani, Dhaka-1213, Bangladesh PO # 1100 Zahin Razeen +880 / 175 437 976 1 zahinrazeen@hydroquo.org www.hydroquo.com Silver Sales Partner
<b>GB</b>	<b>UNITED KINGDOM ADDRESS</b>	Badger Meter UK/ATi UK Technology House, Gatehead Business Park Delph, Saddleworth, OL3 5DE Tom Lendrem +44 / 1457 600 728 tlendrem@badgermeter.com www.analyticaltechnology.com	<b>BE</b>	<b>BELGIUM ADDRESS</b>	Elscolab n.V. Hogenakkerhoekstraat 14, 9150 Kruikebe Dirk Vleminckx +32 / 3 / 250 15 70 elscolab@elscolab.com www.elscolab.com Gold Sales Partner
<b>CN</b>	<b>CHINA ADDRESS</b>	s::can China Representative Office Rm D/17F Building B, 1118 Changshou Rd. 200042 Shanghai Li Xiao +86-21 / 340 603 11 lxiao@s-can.cn www.s-can.cn	<b>BG</b>	<b>BULGARIA ADDRESS</b>	Scientact BG LTD 46, Prof. Kiril Popov Str, 1734 Sofia, Studentski Grad Dimitris Kouvas +359 / 24 68 48 67 +359 / 89 36 15 770 - 71 bg@scientact.com www.scientact.com Silver Sales Partner
<b>AE</b>	<b>UNITED ARAB EMIRATES ADDRESS</b>	Badger Meter Middle East  Thuraya Tower 1, Al Sufouh, Dubai Internet City Dubai Vijaya Sarathi Ramasamy +971 / 456 491 09 vramasamy@badgermeter.com www.badgermeter.com	<b>BR</b>	<b>BRAZIL ADDRESS</b>	Pensalab Industrial Equipment SA R. Minerva, 129 - Perdizes, São Paulo SP, 05007-030 Mariana Carnielli +55 / 11 997 58 - 4023 mariana.carnielli@pensalab.com.br www.pensalab.com.br Silver Sales Partner
<b>SG</b>	<b>SINGAPORE ADDRESS</b>	Badger Meter Asia Singapore Branch Office, 28 Ayer Rajah Crescent #08-06, Singapore 139959 Jonathan Chan +65 / 634 648 36 jchan@badgermeter.com www.badgermeter.com		<b>CONTACT PHONE</b>	

- STATUS :: Headquarters, Representative Office, Affiliate
- STATUS :: Gold Sales Partner
- STATUS :: Silver Sales Partner

<b>CA</b>	CANADA ADDRESS  CONTACT PHONE EMAIL WEB STATUS	Arrow Technology Group 11432 215 Street (Winterburn Rd.), T5S 2Y3, Edmonton, Alberta Lyndon Lobo +1 / 780 / 701 40 50 lyndon@atg.net www.atg.net Silver Sales Partner	<b>FI</b>	FINLAND ADDRESS  CONTACT PHONE EMAIL WEB STATUS	Luode Consulting Sinimaentie 10 B 02630 Espoo Mikko Kiirikki +358 / 40 / 867 83 66 mikko.kiirikki@luode.net www.luode.net Gold Sales Partner
<b>CA</b>	CANADA ADDRESS  CONTACT PHONE EMAIL WEB STATUS	Aquatic Life Ltd. 34 Alexander Avenue ROE 1L0 Pinawa, MB Jeff Simpson +1 / 204 / 753 52 70 aquatic@aquaticlife.ca www.aquaticlife.ca Gold Sales Partner	<b>GR</b>	GREECE ADDRESS CONTACT PHONE EMAIL WEB STATUS	Scientact SA 16 Kanari St., 55644 Thessaloniki Dimitris Kouvas +30 / 2310 / 946 126 dgk@scientact.com.gr http://www.scientact.com.gr Silver Sales Partner
<b>CH</b>	SWITZERLAND ADDRESS CONTACT PHONE EMAIL WEB STATUS	Uniqtech /Unimon GmbH Vorbühlstrasse 21, CH-8962 Bergdietikon Martina Hofer + 41 / 43 444 95 56 info@unimon.ch www.unimon.ch Gold Sales Partner	<b>ID</b>	INDONESIA ADDRESS  PHONE EMAIL WEB STATUS	Has Environmental Ruko Mega Cempaka Mas Blok i No.12, Jl. Letjend Soeprapto – Jakarta Pusat +62 / 21 429 0000-7 info@has-environmental.com www.has-environmental.com Gold Sales Partner
<b>CL</b>	CHILE ADDRESS  CONTACT PHONE EMAIL WEB STATUS	Nereus SpA El Ventisquero 1204, Bodega 43 8640000 Renca – Santiago, Chile Jose A Hernandez +56 / 2 / 224 212 67 jhernandez@nereus.cl www.nereus.cl Gold Sales Partner	<b>IE</b>	IRELAND ADDRESS CONTACT PHONE EMAIL WEB STATUS	Coftec MOANBAUN, ATHENRY, CO. GALWAY, H65 Y078 Darragh Hobbs +353 / 91 844356 info@coftec.ie www.coftec.ie Gold Sales Partner
<b>CO</b>	COLOMBIA ADDRESS CONTACT PHONE EMAIL WEB STATUS	Intecon Colombia SAS Cra 43A #19-17 local 9513, Medellín Gustavo Palacio & Rodrigo Rozzo +57 / 311 356 80 51 sales@inteconinc.com www.inteconinc.com Gold Sales Partner	<b>IN</b>	INDIA ADDRESS  CONTACT PHONE EMAIL WEB STATUS	Aaxis Nano Technologies SCF 78, 2nd Floor, Phase 2, SAS Nagar District Mohali, State Punjab, 160055 Sanjeev Gogia +91 / 172 / 509 82 79 info@aaxisnano.com www.aaxisnano.com Gold Sales Partner
<b>CR</b>	COSTA RICA ADDRESS  CONTACT PHONE EMAIL WEB STATUS	Innovagua SA 100 m Norte de Prousa, Diagonal AyA, Ipís, Goicoechea, 10805 San José Kenneth Mena +506 / 2245 0269 ventas@innovagua.com www.innovagua.com Silver Sales Partner	<b>IL</b>	ISRAEL ADDRESS  CONTACT PHONE EMAIL WEB STATUS	Dionyx Liquid Analysis Ltd. Hasadna 13 Street 4365006 Ra'anana Leon Foror +972 / 9 886 6052 leon@dionyx.co.il www.dionyx.co.il Gold Sales Partner
<b>CZ</b>	CZ CZECH REPUBLIK ADDRESS  CONTACT PHONE EMAIL WEB STATUS	ECM ECO Monitoring, s. r. o Dobrá 240 73951 Dobrá Peter Smítek +420 / 558 / 60 17 27 ecmdobra@ecomonitoring.cz www.ecomonitoring.cz Silver Sales Partner	<b>IT</b>	ITALY ADDRESS  CONTACT PHONE EMAIL WEB STATUS	Isoil Industria spa Via F.lli Gracchi, 27 20092 Cinisello Balsamo MI Roberto Vesprini +39 / 02 660 272 38 vendite@isoil.it www.isoil.it Gold Sales Partner
<b>DK</b>	DENMARK ADDRESS  CONTACT PHONE EMAIL WEB STATUS	LØWENER Industri ApS Smedeland 2 2600 Glostrup Lars Nissen-Petersen +45 / 43 200 300 lnp@loewener.dk www.loewener.de Gold Sales Partner	<b>JP</b>	JAPAN ADDRESS:  CONTACT PHONE EMAIL WEB STATUS	Ebara Jitsugyo Co. Ltd. Environmental Measuring Instrument Technology Center 2-3-12 Kurigi, Asao-ku, Kawasaki-shi, 215-0033 Kanagawa Masahiro Kanai +81 / 44 / 981 05 60 kanai@ejk.co.jp www.ejk.co.jp Gold Sales Partner
<b>EE</b>	ESTONIA ADDRESS CONTACT PHONE WEB STATUS	Mativesi OÜ Pae 4, Pärnu, 80042 Pärnu Matthias Eichhorst +372 / 519 279 81 www.mativesi.ee Silver Sales Partner			

<b>KR</b>	KOREA ADDRESS	Dong Moon ENT Co., Ltd #501, #503~#505, Woolim e-Biz Center II, 12, Digital-ro 33-gil , Guro-gu, Seoul, 08377	<b>RO</b>	ROMANIA ADDRESS	TehnInstrument Impex Srl Laboratorului Street, no. 31B 100301 Ploiesti jud. Prahova
	CONTACT PHONE	Song Yo III +82 / 2 / 890 35 91		CONTACT PHONE	Sebastian Codescu +40 722 559 754
	EMAIL	dongmoonent@naver.com		EMAIL	office@tehnoinstrument.ro
	WEB	http://www.dongmoonent.co.kr		WEB	www.tehnoinstrument.ro
	STATUS	Gold Sales Partner		STATUS	Gold Sales Partner
<b>MY</b>	MALAYSIA ADDRESS	Lab-Environ Instruments Sdn Bhd C-3A-6, Kuchai Exchange, No. 43 Jalan Kuchai Maju 13 58200 Kuala Lumpur	<b>RS</b>	SERBIA ADDRESS	O2 Process Solutions Jurija Gagarina 179, 11073 Belgrad
	CONTACT PHONE	Range Lee Kwong Leng +60 / 3 / 798 434 58		CONTACT PHONE	Dejan Otašević +381 / 11 22 898 15
	EMAIL	sales@lab-environ.com		EMAIL	o2ps@o2ps.rs
	WEB	www.lab-environ.com		WEB	www.o2ps.rs
	STATUS	Gold Sales Partner		STATUS	Gold Sales Partner
<b>MY</b>	MALAYSIA ADDRESS	Vodapro SDN BHD 100, Jalan Pusat Perniagaan 1 Pusat Perniagaan, Jalan Raja Uda 12300 Butterworth, Pinang	<b>SE</b>	SWEDEN ADDRESS	Luode Consulting Ronnebyvägen 2, 12152 Johanneshov
	CONTACT PHONE	Wai Chun Yee +60 / 16 559 7062		CONTACT PHONE	Niklas Strömbeck +46 / 70 / 850 96 69
	EMAIL	wai@vodaproasia.com		EMAIL	niklas.strombeck@luode.net
	WEB	www.vodaproasia.com		WEB	www.luode.net
	STATUS	Silver Sales Partner		STATUS	Gold Sales Partner
<b>NL</b>	NETHERLANDS ADDRESS	Qsenz B.V. Maricoweg 15A 1791 MD - Den Burg - Texel	<b>SG</b>	SINGAPORE ADDRESS	Ansac Technology (S) Pte Ltd 35, Marsiling Industrial Estate Road 3, #02-01 Singapore 739257
	CONTACT PHONE	Ewout Riteco +31 / 222 76 00 16		CONTACT PHONE	Steve Yeap +65 / 984 346 03
	EMAIL	ewout.riteco@qsenz.nl		EMAIL	styeap@ansac-tech.com.sg
	WEB	www.qsenz.nl		WEB	www.ansac-tech.com.sg
	STATUS	Gold Sales Partner		STATUS	Gold Sales Partner
<b>NO</b>	NORWAY ADDRESS	Pemac AS Barstølveien 50F, P.O. Box 9038 4696 Kristiansand	<b>SI</b>	SLOVENIA ADDRESS	Microbium d.o.o. Litijska cesta 261 1261 Ljubljana-Dobrunje
	CONTACT PHONE	Freddy Prøytz Ringstad +47 / 38 / 05 61 00		CONTACT PHONE	Gregor Zupin +386 / 30 255 470
	EMAIL	freddy@pemac.no		EMAIL	info@microbium.si
	WEB	www.pemac.no		WEB	www.microbium.si
	STATUS	Gold Sales Partner		STATUS	Silver Sales Partner
<b>NZ</b>	NEW ZEALAND ADDRESS	Aquaero New Zealand Ltd 89 Colombo St Frankton Hamilton New Zealand 3204	<b>SK</b>	SLOVAKIA ADDRESS	ECM ECO Monitoring, a. s. Nevádzová 5, 821 01 Bratislava
	CONTACT PHONE	Philipp Jaser +64 / 21 190 3007		CONTACT PHONE	Michal Ruzicka +421 / 2 / 43 42 94 17
	EMAIL	philipp@aquAero.co.nz		EMAIL	ecm@ecm.sk
	WEB	https://www.linkedin.com/company/aquaero-new-zealand/		WEB	www.ecomonitoring.com
	STATUS	Gold Sales Partner		STATUS	Gold Sales Partner
<b>PL</b>	POLAND ADDRESS	INTROL Sp. o.o. 40-519 Katowice, ul. Kościuszki 112	<b>TK</b>	TURKEY ADDRESS	Enotek Müh. ve Danismanlik Hiz. Ltd. Sti. Fulya Mah. Senol Sok. Feride Is Merkezi No:3 Kat:2, D:5, 34394 Sisli, Istanbul
	CONTACT PHONE	Grzegorz Gruzka +48 / 32 789 00 63		CONTACT PHONE	Kayhan Mert +90 / 212 / 28 812 58
	EMAIL	ggruzka@introl.pl		EMAIL	kmert@enotek.com.tr
	WEB	www.introl.pl		WEB	www.enotek.com.tr
	STATUS	Gold Sales Partner		STATUS	Silver Sales Partner
<b>PT</b>	PORTUGAL ADDRESS	Contimetra Rua do Proletariado 15B Portela de Carnaxide, 2790-138 Carnaxide	<b>TW</b>	TAIWAN, CHINA ADDRESS	Grand Tech (T.F.) Co., Ltd. 6F., No.6, Zhulin Rd. Linkou Dist. New Taipei City 244
	CONTACT PHONE	António Soares +351 / 214 203 900		CONTACT PHONE	Kuan-Yi Ke +886 / 2 / 86 01 36 63
	EMAIL	industria@contimetra.pt		EMAIL	grand-tech@grand-tech.com.tw
	WEB	www.zenzorcontrol.pt		WEB	www.grand-tech.com.tw
	STATUS	Gold Sales Partner		STATUS	Gold Sales Partner
<b>ZA</b>	SOUTH AFRICA ADDRESS	Action Instruments SA CC 7th Floor Everite House, 20 de Korte Street Braamfontein, 2001 Johannesburg		CONTACT PHONE	Jacques Franken +27 / 11 / 403 22 47
	CONTACT PHONE			EMAIL	sales@aisa.co.za
	EMAIL			WEB	www.aisa.co.za
	WEB			STATUS	Silver Sales Partner
	STATUS				



# Notes

abbreviation list	
est	estimated
f	filtered
eq	equivalent
color app	color apparent
color tru	color true (filtered)

All units are in millimeter.  
Subject to misprint or typographical errors.  
We worked with greatest accuracy though data  
can be outdated.  
We do not take any liability for content and data.  
© s::can GmbH  
Release: October 2023



HEADQUARTERS AUSTRIA  
s::can GmbH • Brigittagasse 22-24, 1200 Vienna, Austria  
T: +43 1 219 73 93, [sales@s-can.at](mailto:sales@s-can.at), [www.s-can.at](http://www.s-can.at)

#### HEADQUARTERS USA

---

Badger Meter Inc.  
6 Iron Bridge Drive,  
Collegeville,  
PA 19426, USA  
T: +1 888 6943230  
[sales@s-can.us](mailto:sales@s-can.us)  
[www.s-can.us](http://www.s-can.us)

#### FRANCE

---

s::can France SARL  
370 route de Saint  
Canadet, 13100 Aix en Pro-  
vence, France  
T: +33 4 42203501  
[sales@s-can.fr](mailto:sales@s-can.fr)  
[www.s-can.fr](http://www.s-can.fr)

#### SPAIN

---

s::can Iberia Sistemas de  
Medición S.L.U.  
Ciutat de Granada 28 bis, 1a  
Planta,  
08005 Barcelona, Spain  
T: +34 930 218447  
[sales@s-can.es](mailto:sales@s-can.es), [www.s-can.es](http://www.s-can.es)

#### ITALY

---

s::can Contact Italy:  
Alessandro Morra  
T: +39 333 9835634  
[amorra@s-can.at](mailto:amorra@s-can.at)

#### UNITED KINGDOM

---

Badger Meter UK/ATI UK  
Technology House,  
Gatehead Business Park,  
Delph, Saddleworth OL35 DE,  
United Kingdom  
T: 44 1753 566100  
[sales@atiuk.com](mailto:sales@atiuk.com)  
[www.analyticaltechnology.com](http://www.analyticaltechnology.com)

#### CHINA

---

s::can China  
Representative Office  
Rm D/17F Building B, 1118  
Changshou Rd.  
200042 Shanghai, China  
T: +86 21 34060311  
[sales@s-can.cn](mailto:sales@s-can.cn)  
[www.s-can.cn](http://www.s-can.cn)

#### DUBAI

---

Badger Meter Middle East  
Water Quality contact:  
Vijaya Sarathi Ramasamy  
Thuraya Tower 1, Al Sufouth,  
Dubai Media City, Dubai, UAE  
T: +971 4 5649190  
[badgerME@badgermeter.com](mailto:badgerME@badgermeter.com)  
[www.badgermeter.com](http://www.badgermeter.com)

#### SINGAPORE

---

Badger Meter Asia  
Water Quality Contact:  
Johnathan Chan  
80 Marine Parade Road,  
#19-07 Parkway Parade,  
Singapore 449269  
T: +65 63 464836  
[jchan@badgermeter.com](mailto:jchan@badgermeter.com)  
[www.badgermeter.com](http://www.badgermeter.com)

#### MEXICO

---

Badger Meter Mexico  
Water Quality Contact:  
T: +52 55 72217700  
[sales@s-can.mx](mailto:sales@s-can.mx)  
[www.s-can.mx](http://www.s-can.mx)